




TOP VIEW

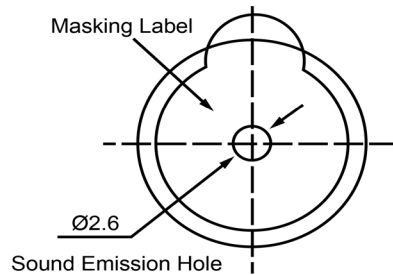

SIDE VIEW

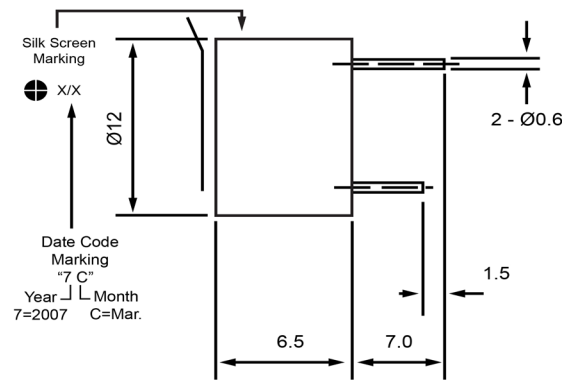

BOTTOM VIEW

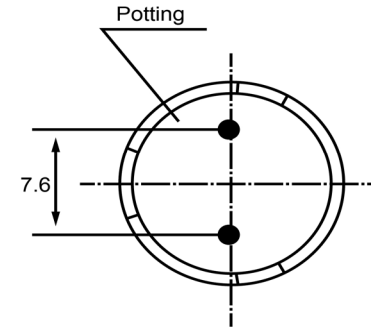

Specifications			Notes	Revision History								
Description	Value	Unit		Version	Description		Date	Approved				
Technology	Electro-Mechanical		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering		10/21/2013	J.S				
Resonant Frequency	2,300	(Hz)										
Rated Voltage	5	(V)										
SPL @ 10cm	85	(dBA)										
Tone	Single Tone											
Mount Type	Thru Hole											
Voltage Range	4 ~ 7	(V)										
Max Rated Current	30	(mA)										
Housing Material	NORYL											
Operating Temperature	-20 ~ +70	°C										
Storage Temperature	-20 ~ +70	°C										
Weight	2	(g)										
 DB UNLIMITED			 DB UNLIMITED			Drawn by		Date	Checked by	Date	Approved by	Date
						A.B.		10/21/2013	C.E.	10/21/2013	J.S	10/21/2013
			Electro-Mechanical Indicator			IE122305-1						

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com