

Electrical / Environmental


- Operating Temperature Range -40°C to +125°C
- Ambient Temperature, Maximum 85°C
- Temperature Rise, Maximum 40°C
- Dielectric Withstanding Voltage 300Vdc

HM67

Surface Mount Common Mode Chokes



Schematic



Specifications

Part Number	Terminals	Common Mode Inductance @100 kHz - 0.1 V (1-4 or 2-3) μH	Inductance Leakage @100 kHz - 0.1 Vrms (1-4) ⁽¹⁾ Typ. μH	Rated Current mA	DCR ⁽²⁾ Max. Ω	Marking Code	Figure
HM67-B5R0LF	1-4, 2-3	5.0 ± 30%	0.08	1000	0.12	A	1
HM67-B110LF	1-4, 2-3	11.0 ± 30%	0.10	500	0.15	B	1
HM67-S250LF	1-4, 2-3	25.0 ± 30%	1.60	500	0.18	C	1
HM67-B510LF	1-4, 2-3	51.0 ± 30%	1.90	500	0.10	D	1
HM67-S510LF	1-4, 2-3	51.0 ± 30%	2.80	500	0.25	E	1
HM67-B471LF	1-4, 2-3	470.0 ± 30%	0.80	500	0.28	F	1
HM67-B102 ⁽³⁾ LF	1-4, 2-3	1000.0 +50%, -30%	0.16	500	0.30	G	1
HM67-B222 ⁽³⁾ LF	1-4, 2-3	2200.0 +50%, -30%	0.16	400	0.42	H	1
HM67-B472 ⁽³⁾ LF	1-4, 2-3	4700.0 +50%, -30%	0.24	200	0.67	I	1
HM67-10510LF	1-4, 2-3	51.0 ± 30% ⁽⁴⁾	2.40 ⁽⁴⁾	200	0.403	0510	2

Notes: (1) Leakage inductance is measured with pin 2 & 3 shorted.

(2) DC resistance is measured at 25°C.

(3) Maximum operating temperature is +85°C.


(4) Common mode inductance & leakage inductance of HM67-10510LF are measured at 100 kHz, 0.05V

Packaging

Standard: Embossed Tape & Reel



Reel:	Diameter:	Figure 1 & 2	=	13" (330.2mm)
	Capacity:	Figure 1	=	400 Units
		Figure 2	=	2000 Units

Ordering Information

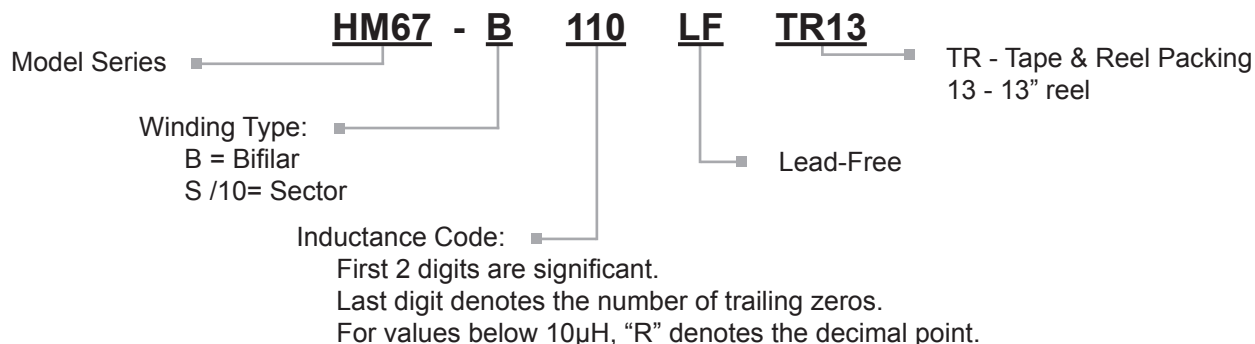

Outline Dimensions (Inch/mm)

Figure 1

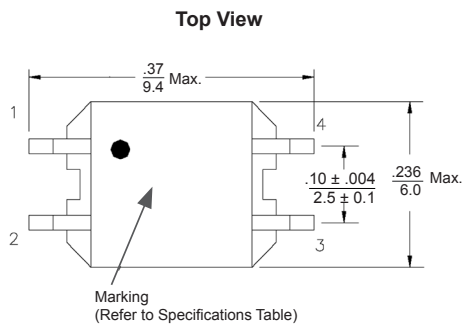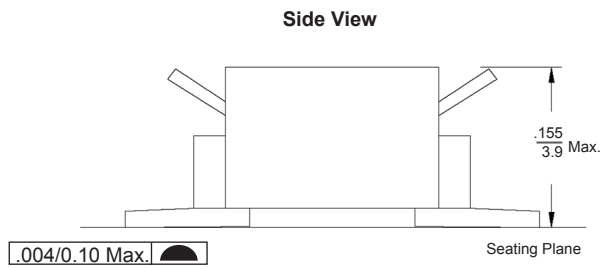

Recommended Solder Pad Layout




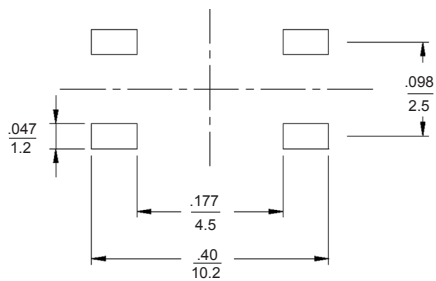


Figure 2

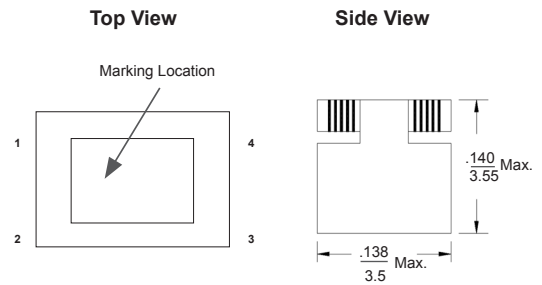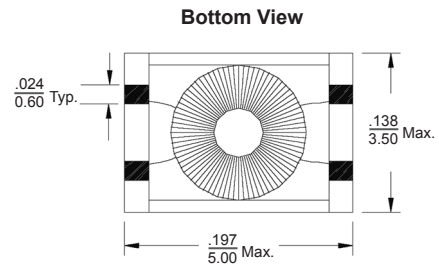


Recommended Solder Pad Layout

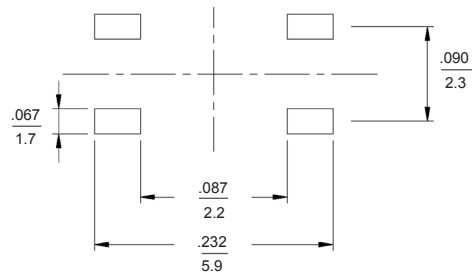


Electrical Characteristics @ 25°C

(A) Attenuation vs. Frequency Graphs


HM67-B5R0LF

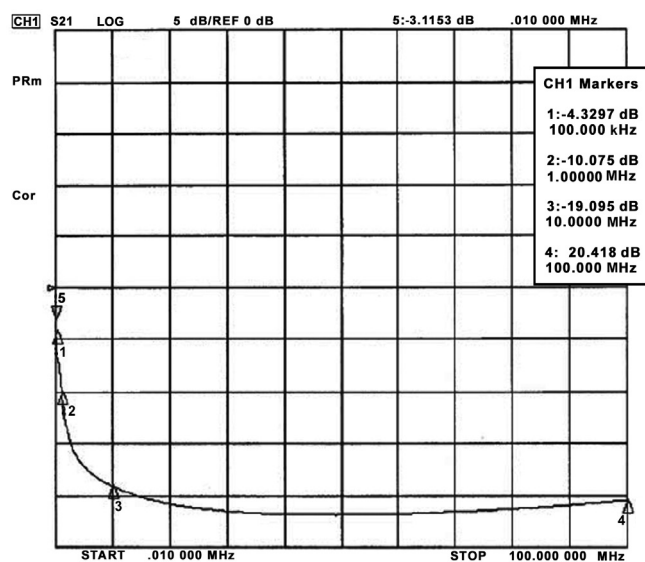


HM67-S250LF

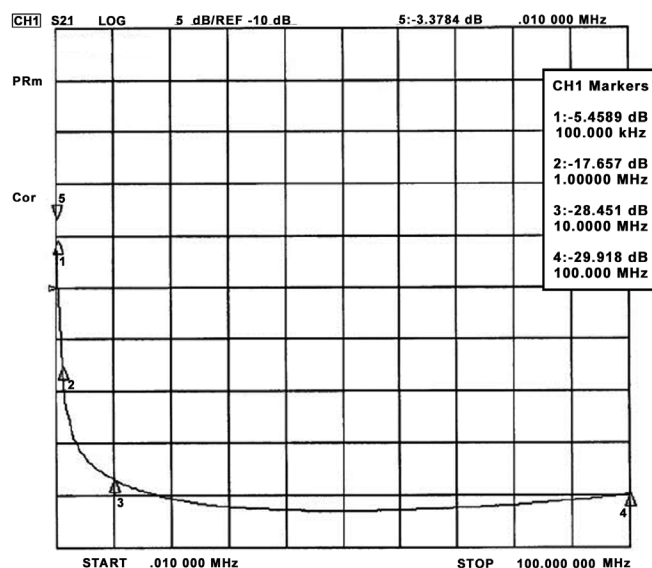

HM67-B110LF

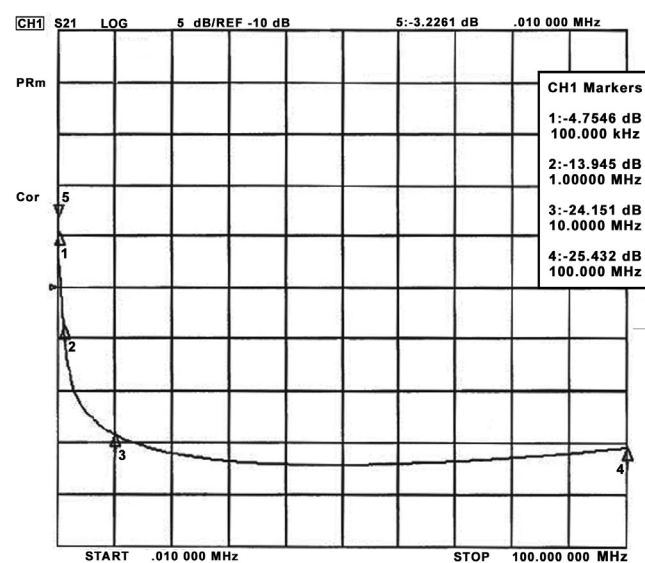


HM67-B510LF

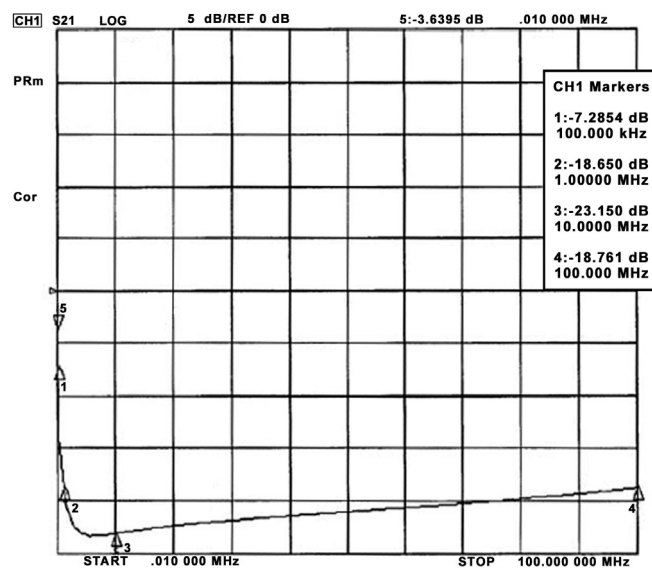


Electrical Characteristics @ 25°C (Cont'd)


HM67-S510LF

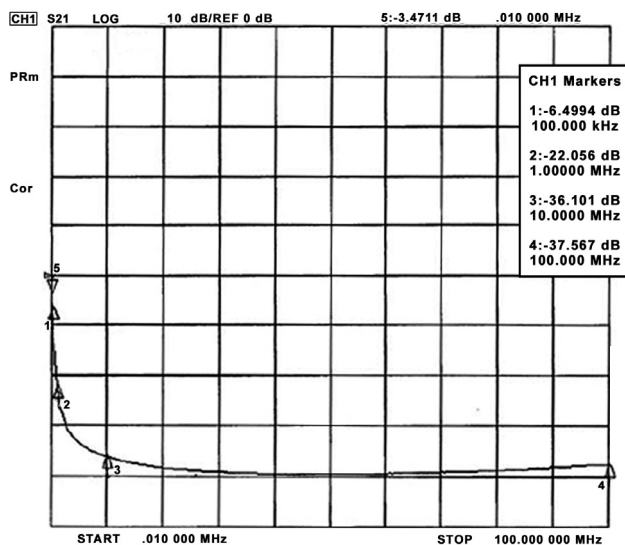


HM67-B102LF

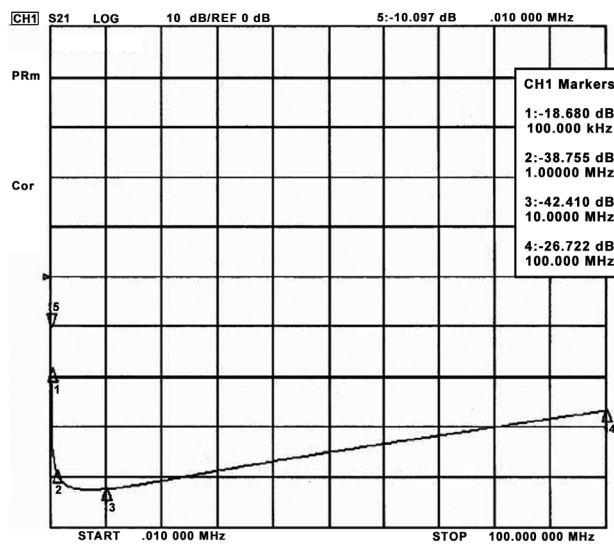


HM67-B471LF

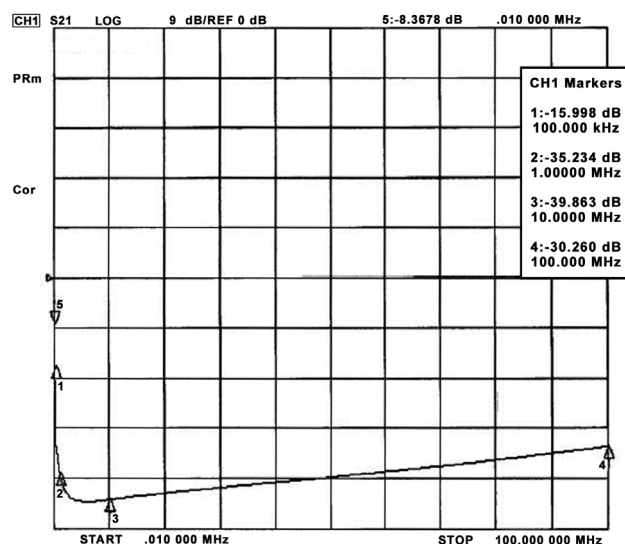

HM67-B222LF

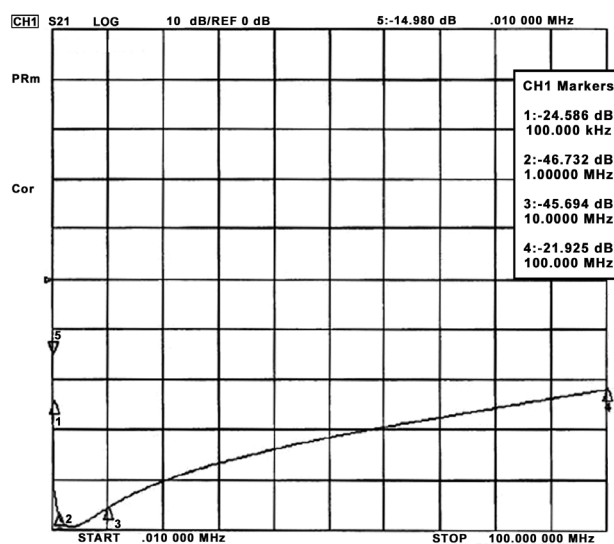


HM67-B472LF

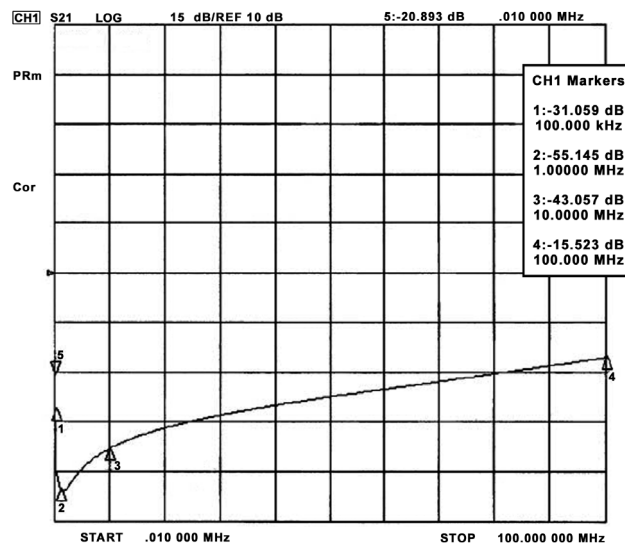


Electrical Characteristics @ 25°C (Cont'd)

(B) Insertion Loss vs. Frequency Graph

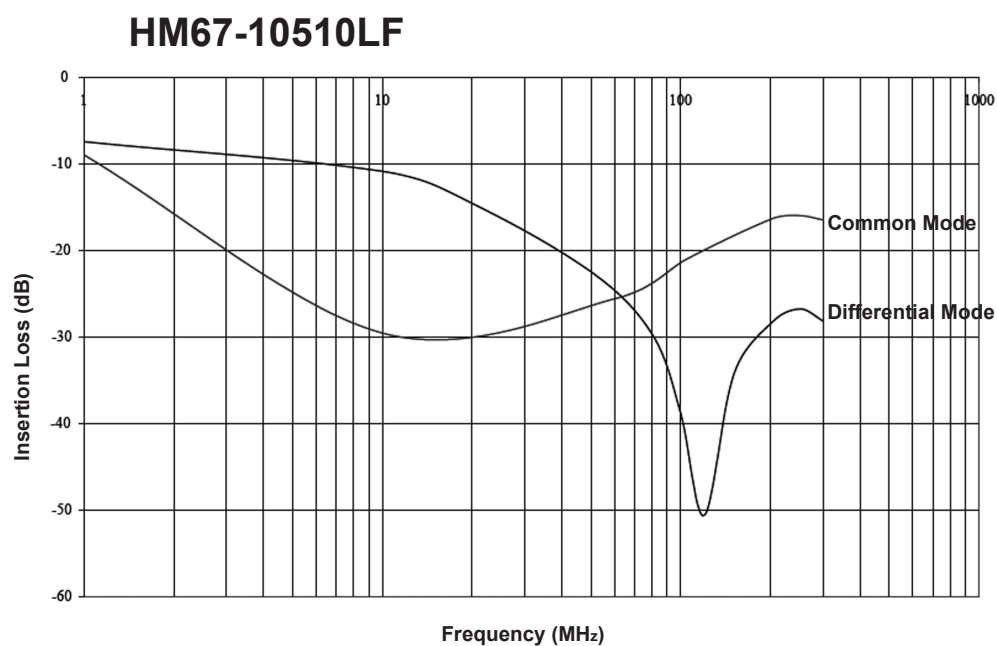

(C) Current Derating Curve

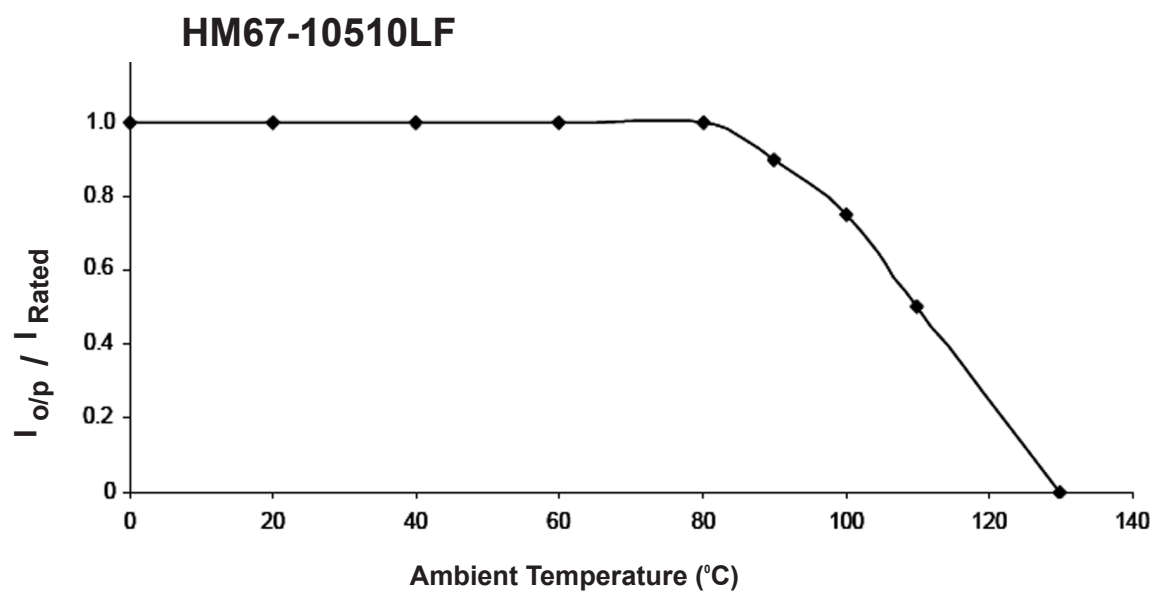

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com