

## Hall Effect Current Sensors L32P\*\*\*S05BFS Series



### Features:

- Open Loop type
- Printed circuit board mounting
- Unipolar power supply
- Industrial temperature range
- Sulfur-proof as standard
- Bus bar version available for 50A & 100A models
- Insulated plastic case according to UL94V0

### Advantage:

- Excellent accuracy and linearity
- Wide nominal current range
- Low temperature drift
- Wide frequency bandwidth
- No insertion loss
- High Immunity To External Interference
- Optimised response time
- Current overload capability

### Specifications


$T_A=25^{\circ}\text{C}$ ,  $V_{CC}=+5\text{V}$ ,  $R_L=10\text{k}\Omega$

| Parameters                                     | Symbol             | L32P050S05BFS                                                              | L32P100S05BFS | L32P150S05BFS                       | L32P200S05BFS | L32P300S05BFS                       | L32P400S05BFS |
|------------------------------------------------|--------------------|----------------------------------------------------------------------------|---------------|-------------------------------------|---------------|-------------------------------------|---------------|
| Rated current                                  | I <sub>f</sub>     | 50A                                                                        | 100A          | 150A                                | 200A          | 300A                                | 400A          |
| Maximum Current                                | I <sub>fmax</sub>  | ±150A                                                                      | ±300A         | ±450A                               | ±600A         | ≥±600AT                             | ≥±600AT       |
| Primary conductor                              |                    | Aperture or Bus Bar                                                        |               | Aperture                            |               |                                     |               |
| Output Voltage                                 | V <sub>OUT</sub>   | V <sub>REF</sub> +0.625V ± 0.015V @ ± I <sub>f</sub>                       |               |                                     |               |                                     |               |
| Offset Voltage                                 | V <sub>OE</sub>    | V <sub>REF</sub> ± 0.025V @ I <sub>f</sub> = 0A                            |               |                                     |               |                                     |               |
| Reference voltage                              | V <sub>REF</sub>   | +2.5V ± 0.020V                                                             |               |                                     |               |                                     |               |
| Output Linearity <sup>1</sup>                  | ε <sub>L</sub>     | ≤ ± 0.5% @ 0A, 0.5 I <sub>f</sub> , I <sub>f</sub>                         |               |                                     |               |                                     |               |
| Power Supply                                   | V <sub>CC</sub>    | + 5V ±5 %                                                                  |               |                                     |               |                                     |               |
| Current Consumption                            | I <sub>C</sub>     | ≤ 15mA                                                                     |               |                                     |               |                                     |               |
| Response Time <sup>2</sup>                     | t <sub>r</sub>     | ≤ 5μs (@ di/dt = F.S. / μs)                                                |               |                                     |               |                                     |               |
| Output Temperature Characteristic <sup>1</sup> | TCV <sub>OUT</sub> | ≤ ± 1.5mV/°C                                                               |               |                                     |               |                                     |               |
| Offset Temperature Characteristic              | TCV <sub>OE</sub>  | ≤ ± 1.0 mV/°C @ I <sub>f</sub> = 0A                                        |               | ≤ ± 0.5 mV/°C @ I <sub>f</sub> = 0A |               | ≤ ± 0.3 mV/°C @ I <sub>f</sub> = 0A |               |
| Reference Temperature Characteristic           | TCV <sub>REF</sub> | ≤ ± 0.012% / °C                                                            |               |                                     |               |                                     |               |
| Hysteresis error                               | V <sub>OH</sub>    | ≤ 7.5mV (0A ↔ I <sub>f</sub> )                                             |               | ≤ 5.0mV (0A ↔ I <sub>f</sub> )      |               | ≤ 2.5mV (0A ↔ I <sub>f</sub> )      |               |
| Withstand Voltage                              | V <sub>d</sub>     | AC2500V for 1minute (sensing current 0.5mA), inside of aperture ↔ terminal |               |                                     |               |                                     |               |
| Insulation Resistance                          | R <sub>IS</sub>    | > 500MΩ (500V DC), inside of aperture ↔ terminal                           |               |                                     |               |                                     |               |
| Frequency Bandwidth <sup>3</sup>               | f                  | DC .. 50kHz                                                                |               |                                     |               |                                     |               |
| Operating Temperature                          | T <sub>A</sub>     | -40°C~+85°C                                                                |               |                                     |               |                                     |               |
| Storage Temperature                            | T <sub>S</sub>     | -40°C~+85°C                                                                |               |                                     |               |                                     |               |


<sup>1</sup> Without offset — <sup>2</sup> Time between 10% input current full scale and 90% of sensor output full scale — <sup>3</sup> Small signal only to avoid excessive heating of magnetic core

### Electrical Performances

Frequency Characteristic data not yet available

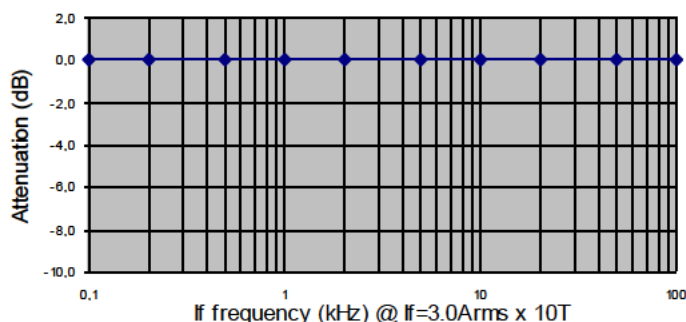


Saturation Characteristic data not yet available

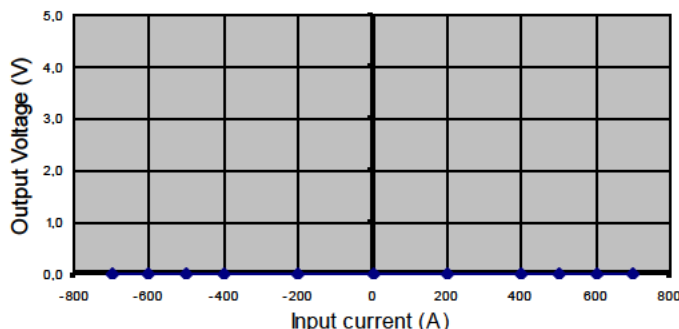


## Hall Effect Current Sensors L32P\*\*\*S05BFS Series

### Mechanical dimensions in mm

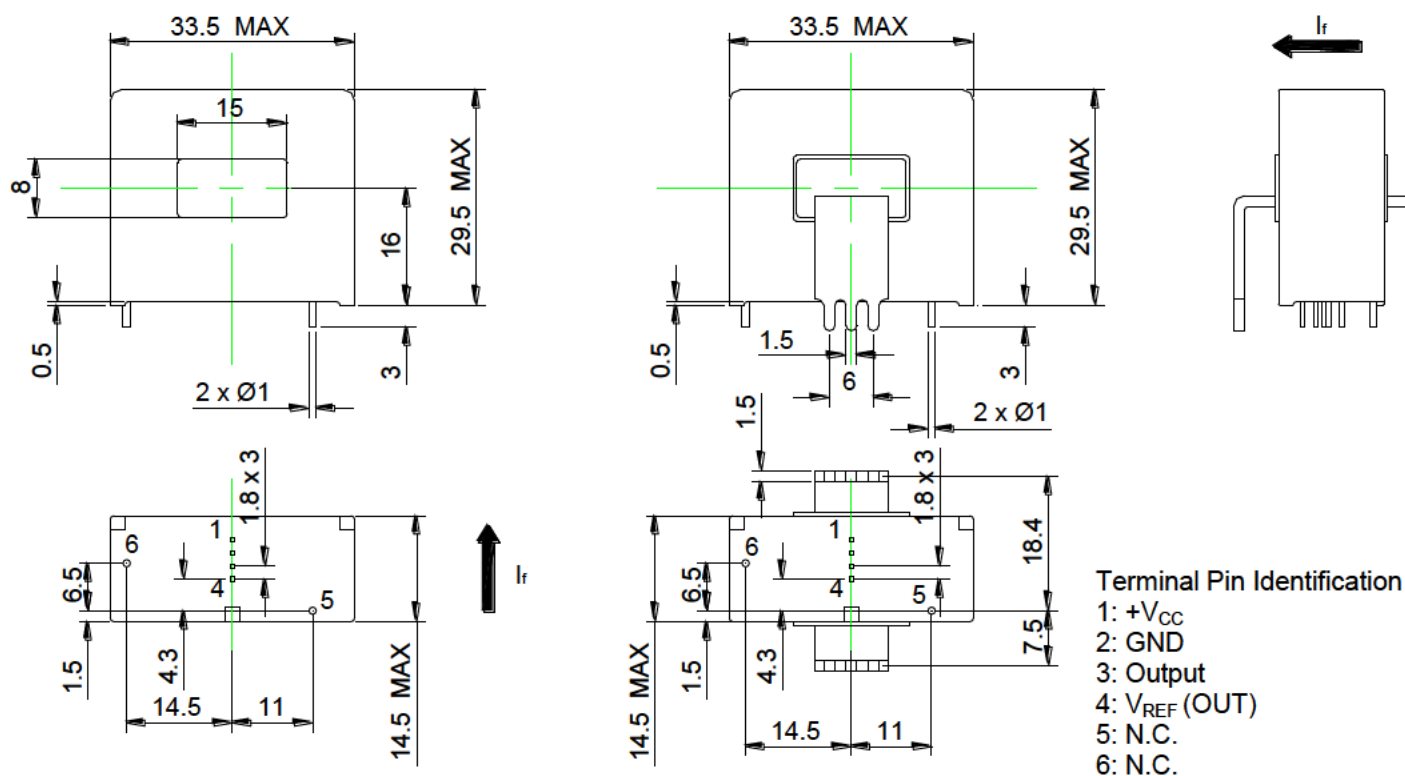

### Electrical connection diagram

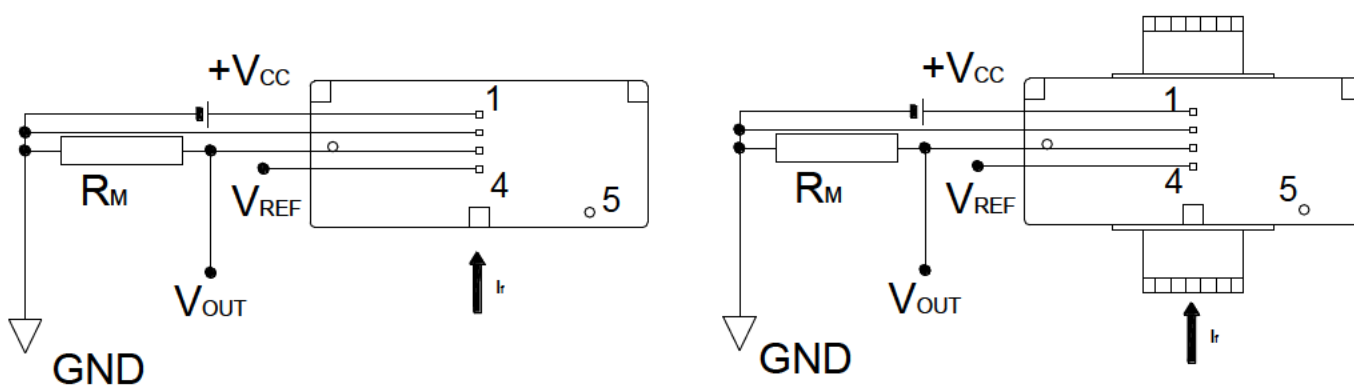

## Package & Weight Information

| Weight | Pcs/box | Pcs/carton | Pcs/pallet |
|--------|---------|------------|------------|
|        |         |            |            |

## Saturation Characteristics

L32P050S05(B)FS


P.3

### Saturation characteristic

at  $V_{CC}=+5V$ ,  $R_L=10k\Omega$ ,  $T_a=+25^\circ C$

| Input current (A) | Output voltage (V) |       |       |       |       | Theoretical value (V) |
|-------------------|--------------------|-------|-------|-------|-------|-----------------------|
|                   | No.1               | No.2  | No.3  | No.4  | No.5  |                       |
| 210.0             | 4.981              | 4.981 | 4.981 | 4.981 | 4.981 | 5.000                 |
| 200.0             | 4.980              | 4.981 | 4.980 | 4.980 | 4.980 | 4.995                 |
| 197.5             | 4.975              | 4.975 | 4.971 | 4.978 | 4.976 | 4.964                 |
| 195.0             | 4.945              | 4.945 | 4.940 | 4.947 | 4.945 | 4.933                 |
| 190.0             | 4.882              | 4.882 | 4.877 | 4.884 | 4.882 | 4.870                 |
| 185.0             | 4.819              | 4.819 | 4.814 | 4.821 | 4.819 | 4.808                 |
| 175.0             | 4.693              | 4.693 | 4.689 | 4.695 | 4.693 | 4.683                 |
| 150.0             | 4.378              | 4.378 | 4.374 | 4.380 | 4.378 | 4.370                 |
| 100.0             | 3.749              | 3.750 | 3.746 | 3.749 | 3.748 | 3.745                 |
| 50.0              | 3.120              | 3.122 | 3.120 | 3.119 | 3.120 | 3.120                 |
| 25.0              | 2.807              | 2.809 | 2.807 | 2.805 | 2.807 | 2.808                 |
| 0.0               | 2.495              | 2.499 | 2.498 | 2.494 | 2.495 | 2.495                 |
| -25.0             | 2.190              | 2.194 | 2.195 | 2.188 | 2.189 | 2.183                 |
| -50.0             | 1.874              | 1.878 | 1.880 | 1.871 | 1.873 | 1.870                 |
| -100.0            | 1.243              | 1.248 | 1.251 | 1.239 | 1.242 | 1.245                 |
| -150.0            | 0.612              | 0.617 | 0.621 | 0.606 | 0.610 | 0.620                 |
| -175.0            | 0.296              | 0.301 | 0.306 | 0.290 | 0.295 | 0.308                 |
| -185.0            | 0.169              | 0.175 | 0.180 | 0.163 | 0.168 | 0.183                 |
| -190.0            | 0.106              | 0.112 | 0.117 | 0.100 | 0.105 | 0.120                 |
| -195.0            | 0.043              | 0.049 | 0.054 | 0.037 | 0.042 | 0.058                 |
| -197.5            | 0.013              | 0.018 | 0.022 | 0.008 | 0.011 | 0.026                 |
| -200.0            | 0.008              | 0.008 | 0.008 | 0.008 | 0.008 | 0.000                 |
| -210.0            | 0.008              | 0.008 | 0.008 | 0.008 | 0.008 | 0.000                 |

### Saturation characteristic (Internal Reference)

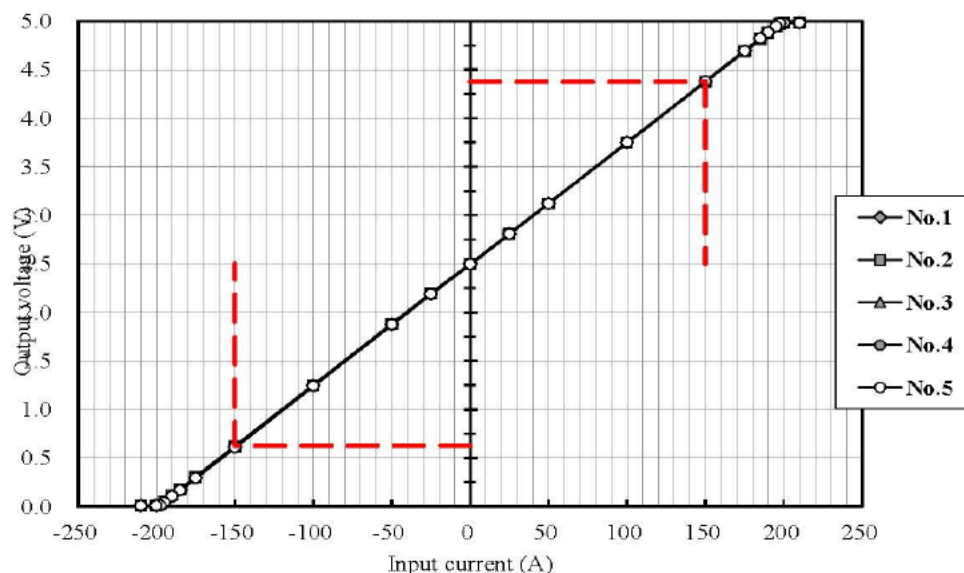

## Frequency Characteristics

L32P150S05FS

P.4

### Frequency characteristic (Reference)


at Detected current  $I_f = 3.2 \times 1.2 \text{ AT}$ ,  $V_{cc} = +5\text{V}$ ,  $R_L = 10\text{k}\Omega$ ,  $T_a = +25^\circ\text{C}$

| If frequency<br>(kHz) | Output voltage - Offset voltage (mVrms) |     |     |     |     | Remarks |
|-----------------------|-----------------------------------------|-----|-----|-----|-----|---------|
|                       | CH1                                     | CH2 | CH3 | CH4 | CH5 |         |
| 0.1                   | 165                                     | 165 | 168 | 166 | 166 |         |
| 0.2                   | 165                                     | 165 | 168 | 166 | 166 |         |
| 0.5                   | 164                                     | 164 | 167 | 165 | 165 |         |
| 1.0                   | 165                                     | 164 | 168 | 166 | 166 |         |
| 2.0                   | 165                                     | 164 | 168 | 166 | 165 |         |
| 5.0                   | 165                                     | 166 | 169 | 166 | 166 |         |
| 10.0                  | 165                                     | 168 | 171 | 166 | 165 |         |
| 20.0                  | 166                                     | 176 | 178 | 168 | 163 |         |
| 50.0                  | 165                                     | 185 | 188 | 170 | 158 |         |
| 70.0                  | 165                                     | 186 | 191 | 170 | 157 |         |
| 100.0                 | 161                                     | 182 | 188 | 166 | 152 |         |
| 120.0                 | 160                                     | 181 | 189 | 166 | 151 |         |
| 150.0                 | 154                                     | 174 | 183 | 160 | 151 |         |
| 200.0                 | 145                                     | 163 | 175 | 154 | 143 |         |
| 250.0                 | 134                                     | 151 | 166 | 147 | 134 |         |
| 300.0                 | 122                                     | 137 | 156 | 139 | 124 |         |

| If frequency<br>(kHz) | Output voltage attenuate quantity (dB) |        |        |        |        | Remarks |
|-----------------------|----------------------------------------|--------|--------|--------|--------|---------|
|                       | CH1                                    | CH2    | CH3    | CH4    | CH5    |         |
| 0.1                   | 0.000                                  | 0.000  | 0.000  | 0.000  | 0.000  |         |
| 0.2                   | -0.011                                 | -0.003 | -0.022 | -0.011 | -0.016 |         |
| 0.5                   | -0.054                                 | -0.054 | -0.054 | -0.058 | -0.052 |         |
| 1.0                   | -0.029                                 | -0.029 | -0.028 | -0.038 | -0.029 |         |
| 2.0                   | -0.034                                 | -0.033 | -0.031 | -0.044 | -0.039 |         |
| 5.0                   | -0.005                                 | 0.031  | 0.009  | -0.026 | -0.029 |         |
| 10.0                  | 0.003                                  | 0.170  | 0.111  | -0.008 | -0.071 |         |
| 20.0                  | 0.030                                  | 0.541  | 0.457  | 0.107  | -0.153 |         |
| 50.0                  | 0.002                                  | 0.995  | 0.960  | 0.189  | -0.422 |         |
| 70.0                  | -0.026                                 | 1.040  | 1.067  | 0.180  | -0.505 |         |
| 100.0                 | -0.229                                 | 0.853  | 0.954  | -0.037 | -0.793 |         |
| 120.0                 | -0.287                                 | 0.822  | 0.986  | -0.021 | -0.838 |         |
| 150.0                 | -0.621                                 | 0.456  | 0.702  | -0.340 | -0.833 |         |
| 200.0                 | -1.155                                 | -0.090 | 0.327  | -0.693 | -1.333 |         |
| 250.0                 | -1.805                                 | -0.768 | -0.111 | -1.106 | -1.876 |         |
| 300.0                 | -2.623                                 | -1.593 | -0.667 | -1.594 | -2.548 |         |

### Frequency characteristic

If frequency (kHz)

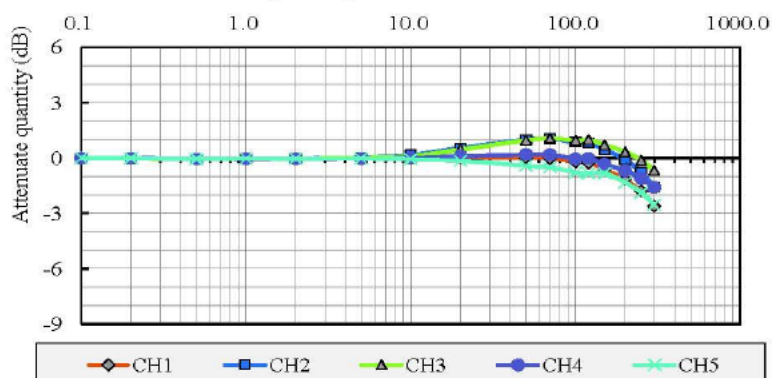

# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)