




0.5mm Pitch Stacking Type Board-to-Board Connector

AA01A Series

CONNECTOR MB-0197-2 January 2011

RoHS Compliant

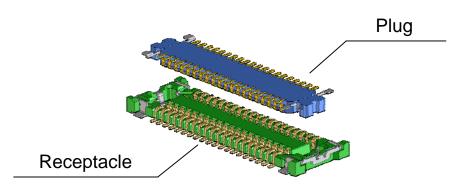

The AA01A Series connectors are 0.5mm-pitch, stacking type, board-to-board connectors ideal for slim, low-profile devices such as mobile phones, LCDs, notebook PCs, and PDAs, which have high density mounting requirements.

Features

- * 0.5mm pitch, 2 rows, 10 to 60 positions, 1.5mm stacking height.
- *The contact structure and surface shape ensure high abrasion resistance and high contact reliability.
- * Secure hold-downs prevent insulator breakage and peeling from FPC for both plug and receptacle.
- *2-point contact design to resist twisting stress.
- *Pb-free. Nickel barrier finish on contact prevents solder migration.

General Specifications


- ■No. of Contacts:
 - 10, 30, 40, 60 pos.
- ■Pitch: 0.5mm, 2 rows
- ■Operating Temperature:
 - -40 Deg. C to +85 Deg. C
- ■Contact Resistance:
 - 70m ohm max. (initial)
- ■Durability: 30 mating cycles

- ■Rated Current: AC, DC 0.2A / per pos.
- ■Rated Voltage: AC, DC 50V
- ■Insulation Resistance: 100M ohm min. (initial)
- Dielectric Withstanding Voltage:
 - AC250Vr.m.s per minute
- ■Total Insertion Force:
 - 1N x n max. (n: pos.)
- ■Total Withdrawal Force:
 - 0.2Nx n min. (n: pos.)


Materials and Finishes

Component	Material / Finish
Contact	Copper alloy / Au plating (0.1um min.)
Insulator	Heat resistant plastic
Hold-down	Plug: Copper alloy / Sn plating
	Receptacle: Copper alloy / Sn plating

Ordering Information

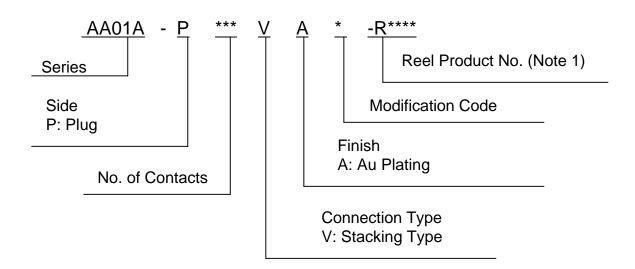


Ordering Information

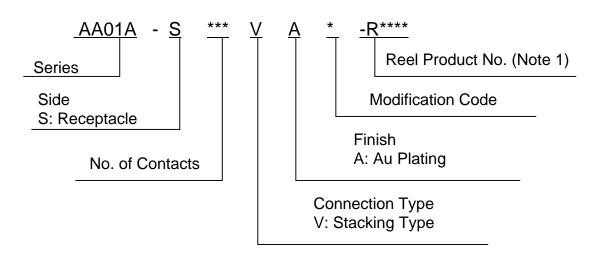



(Note 1) An embossed tape reel contains 3000 pieces.


For information on emboss taping specifications, please contact us directly.


Plug







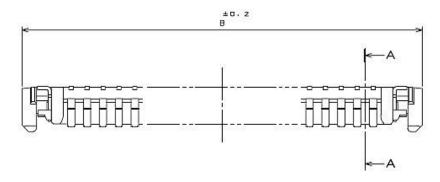

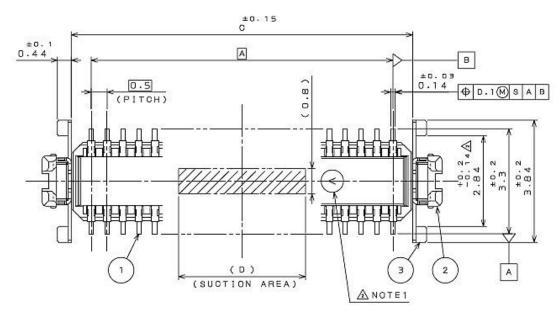


名称(TITLE)	Α	В	С	D
A A O 1 A - P O 1 O V A 1	2.0	5.1	3.24	2.0
AA01A-P030VA1	7.0	10.1	8.24	2.0
A A O 1 A - P O 4 O V A 1	9.5	12.6	10.74	4.0
A A O 1 A - P O 6 O V A 1	14.5	17.6	15.74	4.0

Note 1) Coplanarity 0.1 mm max.


Note 2) An embossed tape reel contains 3000 pieces.

Please contact us for details of embossed tape specifications

Part Number	AA01A-P***VA1	
SJ Drawing	SJ036738	

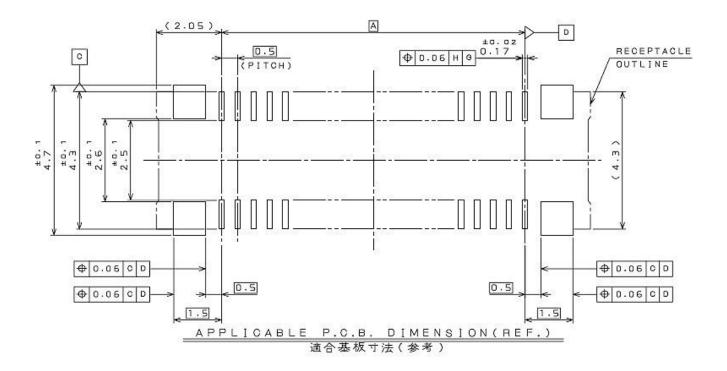

Part Number	AA01A-S***VA1	
SJ Drawing	SJ036740	

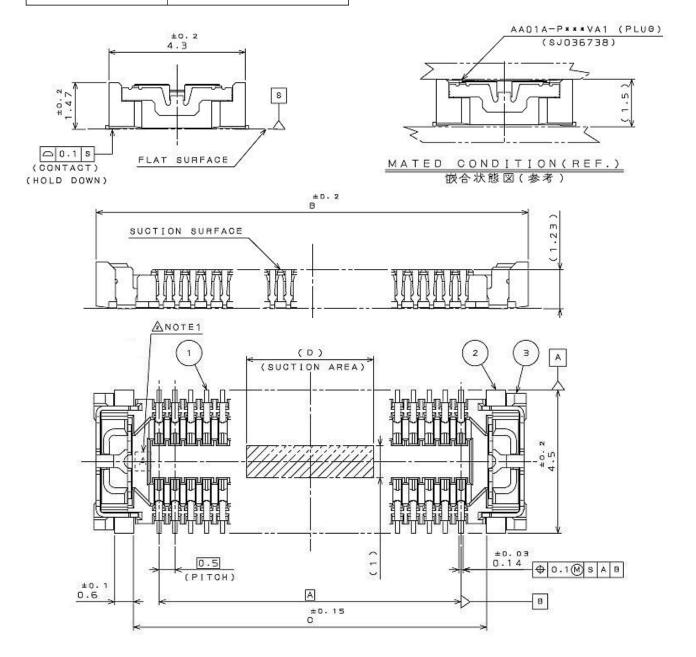


名称(TITLE)	А	В	О	D
A A O 1 A - S O 1 O V A 1	2.0	6.1	3.6	2.0
A A O 1 A - S O 3 O V A 1	7.0	11.1	8.6	2.0
A A O 1 A - S O 4 O V A 1	9.5	13.6	11.1	4.0
A A O 1 A - S O 6 O V A 1	14.5	18.6	16.1	4.0

Note 1) Coplanarity 0.1 mm max.

Note 2) An embossed tape reel contains 3000 pieces.

Please contact us for details of embossed tape specifications

Part Number	AA01A-S***VA1
SJ Drawing	SJ036740

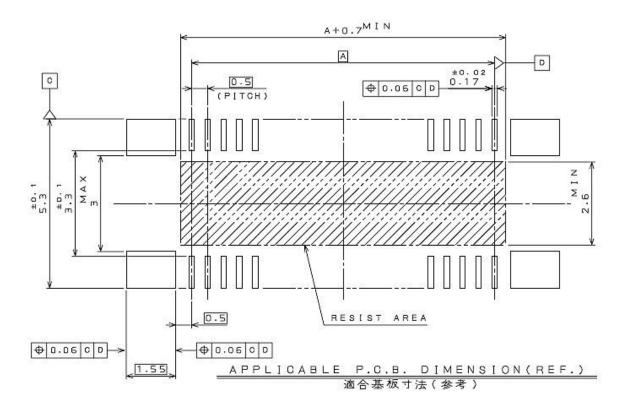

Japan Aviation Electronics Industry, Limited

Product Marketing Division

Aobadai Building, 3-1-19, Aobadai, Meguro-ku, Tokyo 153-8539 Phone: +81-3-3780-2787 FAX: +81-3-3780-2946 Recommended applications: Computers, Office machines, Measuring devices,

Telecommunication devices (Terminals, Mobile)

information.

Motice: Products shown in this brochure are made for the applications listed below. However, if the above-mentioned products are to be used in aerospace devices, marine cable-connection devices, atomic power control systems, medical equipment for life-support systems, or any other specific application requiring extremely high reliability, please contact JAE for further

Telecommunication devices (Terminals, Mobile devices), AV devices, Household applications, FA devices, etc.

AMEYA360 Components Supply Platform

Authorized Distribution Brand:

























Website:

Welcome to visit www.ameya360.com

Contact Us:

Address:

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd Minhang District, Shanghai , China

Sales:

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

Customer Service :

Email service@ameya360.com

Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com