

"High Frequency Ceramic Solutions"

967/1795 MHz Diplexer

Detail Specification

P/N 0967DP18A1795



Rev 11/13/01 Page 1 of 2

Part Number	Frequency (MHz)	Attenuation Low Band	Attenuation High Band	Return Loss
0967DP18A1795_	954 - 980	0.75 dB max.	20 dB min.	12 dB min.
	1710 - 1880	20 dB min.	0.55 dB max.	12 dB min.

Input Power	Impedance	Operating Temperature Range	Reel Qty
3 Watts max	50 Ω	-40 to +85°C	3000


Mechanical Dimensions

	L	W	T	a	b	c	g	p
Inches	0.126 $\pm$.006	0.064 $\pm$.006	0.034 $\pm$.004	0.022 $\pm$.006	0.014 $\pm$.006	0.012 $\pm$.004/-0.008	0.016 $\pm$.006	0.039 $\pm$.004
mm	3.2 $\pm$ 0.15	1.6 $\pm$ 0.15	0.85 $\pm$ 0.1	0.55 $\pm$ 0.15	0.35 $\pm$ 0.15	0.3 $\pm$ 0.1/-0.2	0.4 $\pm$ 0.15	1.0 $\pm$ 0.1




Terminal Configuration

No.	Function	No.	Function
1	Low Band Port (P2)	4	GND
2	GND	5	Common Port (P3)
3	High Band Port (P1)	6	GND



Mounting Considerations

Mount these devices with brown colored side facing up. Line width should be designed to provide 50 Ω impedance matching characteristics.

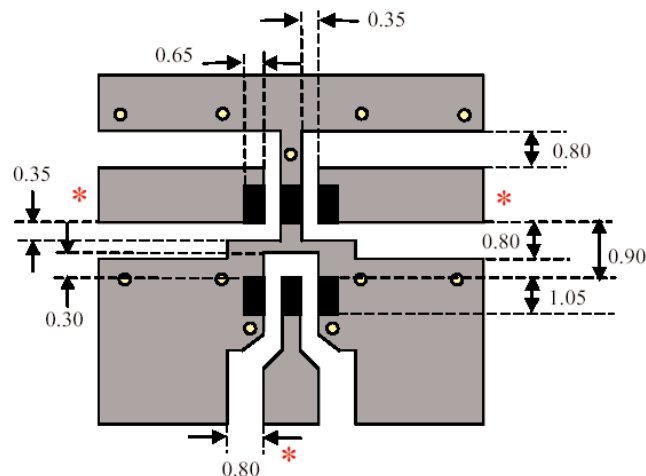

-  Solder Resist
-  Land
-  Through-hole (ϕ 0.3)

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



"High Frequency Ceramic Solutions"

967/1795 MHz Diplexer

Detail Specification

P/N 0967DP18A1795

Rev 11/13/01 Page 2 of 2

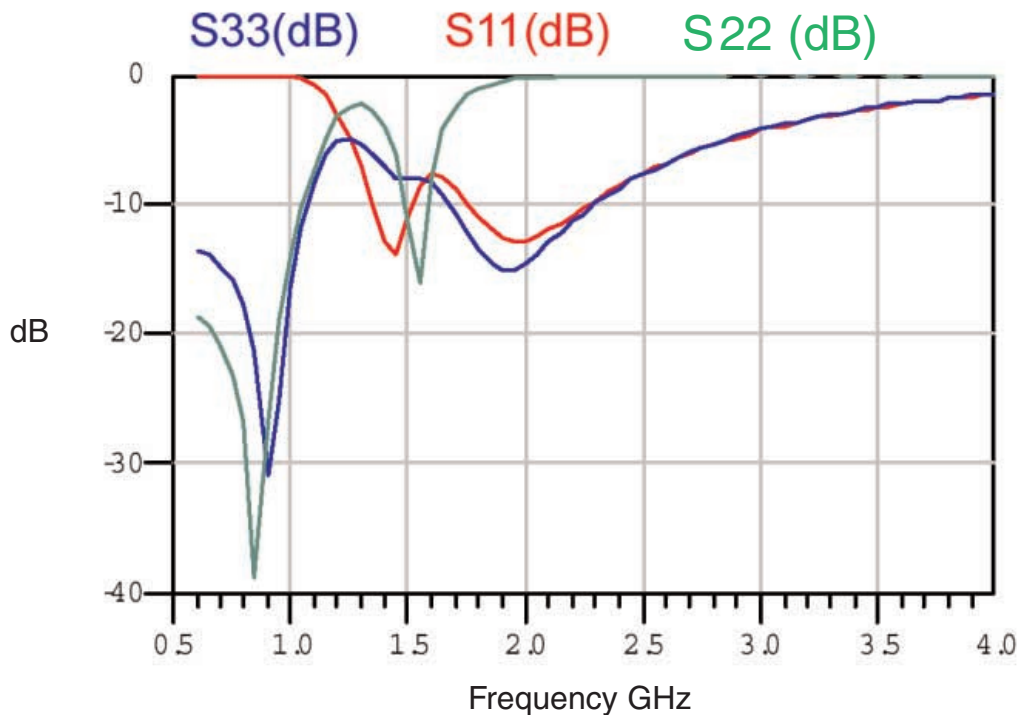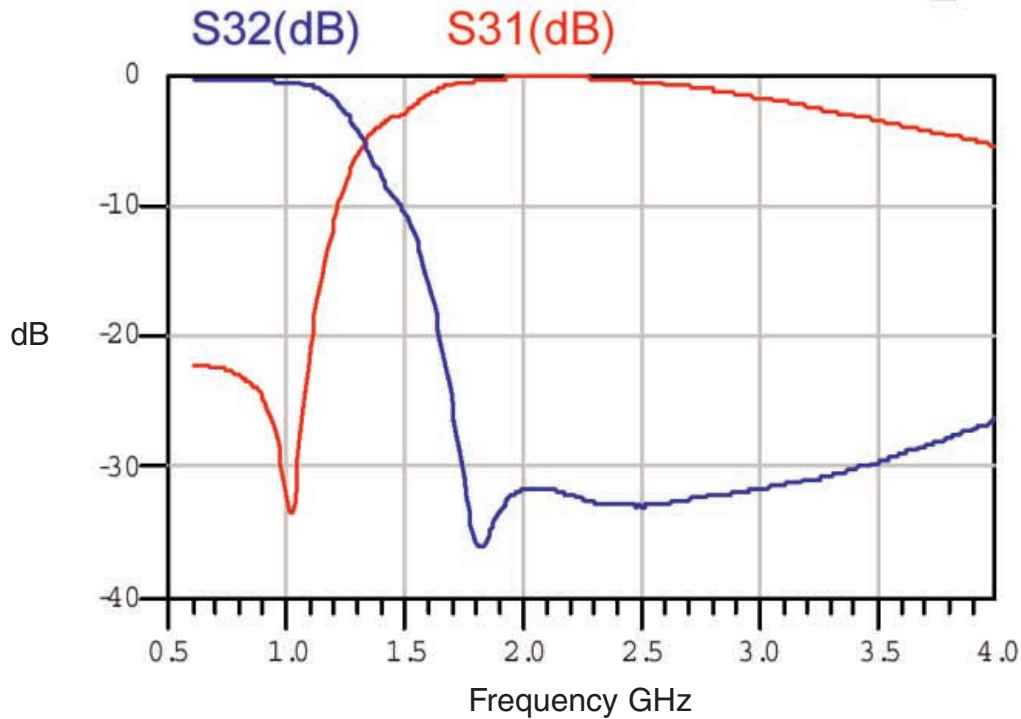

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com