




PLCC SOCKET SERIES D00

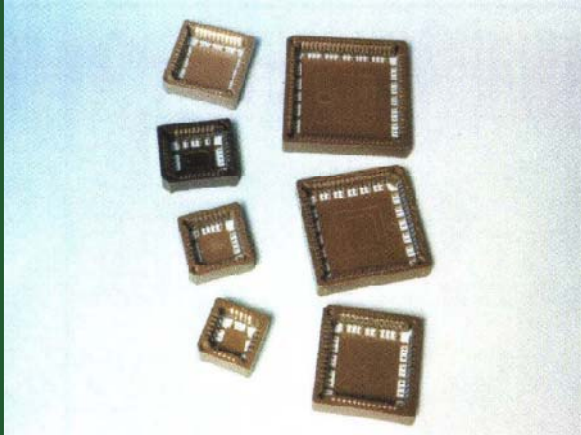


FEATURES:

Low profile design
Seven different circuit sizes: 20 to 84 positions
Available in tube or tape and reel packaging

SPECIFICATIONS:

Insulator Material: Polyphenylene Sulfide, UL 94V-0
Contact Material: Phosphor Bronze
Insulation Resistance: 1000 Megohms minimum
Contact Resistance: 25 milliohms maximum
Contact Plating: 150 microinches of Tin over Nickel
Dielectric Withstanding Voltage: 600 VAC rms for 1 minute
Insulator Resistance: 1000 Megohms minimum
Operating Temperature: -55°C to +85°C

Example Part Number: **D00-020-490-001**

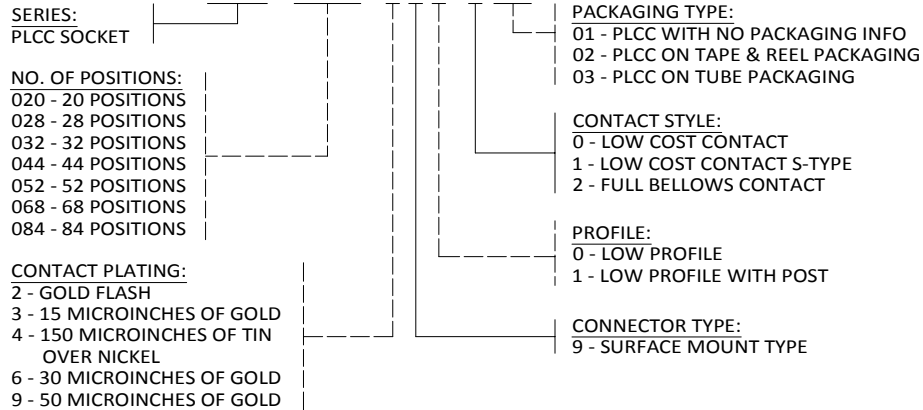

<u>Part No.</u>	<u>Description</u>	<u>Available in S-Type</u>	<u>Available in Bellows</u>	<u>Tape & Reel Qty.</u>
D00-020-490-XXX	20 Positions	Yes	Yes	500
D00-028-490-XXX	28 Positions	Yes	Yes	400
D00-032-490-XXX	32 Positions	Yes	Yes	500
D00-044-490-XXX	44 Positions	Yes	Yes	300
D00-052-490-XXX	52 Positions	No	Yes	250
D00-068-490-XXX	68 Positions	No	Yes	225
D00-084-490-XXX	84 Positions	No	Yes	Not Applicable

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com