
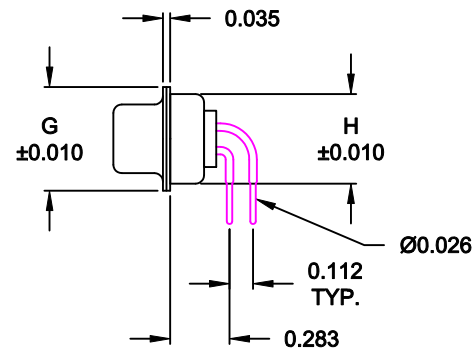


DESCRIPTION: MALE - 0.283 RIGHT ANGLE / MACHINED - ECONOMY

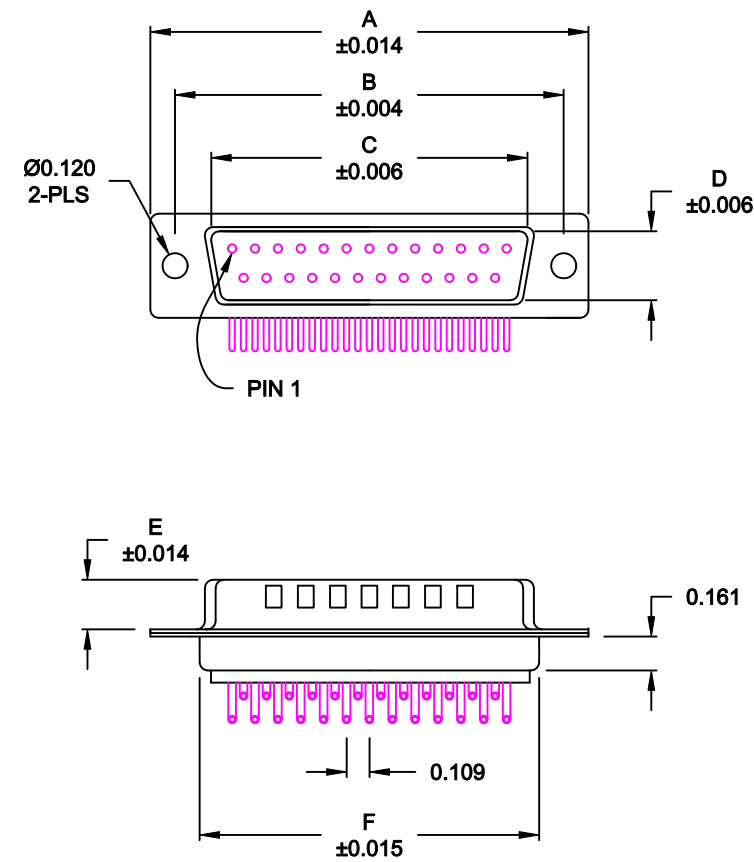

MEETS IP67 STANDARDS
(SEE PAGE 3 FOR SEALING DETAILS)

No. OF PINS	DIMENSIONS							
	A	B	C	D	E	F	G	H
9	1.213	0.984	0.666	0.329	0.236	0.756	0.496	0.427
	30.80	24.99	16.92	8.36	5.99	19.20	12.60	10.85
15	1.541	1.312	0.994	0.329	0.236	1.091	0.496	0.427
	39.15	33.32	25.25	8.36	5.99	27.70	12.60	10.85
25	2.087	1.852	1.534	0.329	0.236	1.618	0.496	0.427
	53.00	47.04	38.96	8.36	5.99	41.10	12.60	10.85

773-EYY-1 1 3 R YY 1

SERIES
POSITIONS
E09
E15
E25
GENDER
1 = MALE
TERMINATION
1 = THROUGH HOLE
SHELL PLATING
3 = NICKEL (GROUND INDENTS)
RoHS COMPLIANT
HARDWARE OPTIONS
00 = NO HARDWARE
01 = .065" CLINCH NUT (BOARD SIDE)
14 = SHORT BRACKET WITH 4-40 SCREW LOCK
46 = BRACKET WITH 4-40 INSERT & BOARDLOCK
PLATING OPTIONS
1 = GOLD FLASH
2 = 30 MICRO-INCH GOLD




MATERIAL:
SHELL: STEEL, NICKEL PLATED
INSULATOR: UL 94V-O RATED, WHITE PA6T
PROCESS TEMP.: 260° C
CONTACT: BRASS
SEALING MATERIAL: F08 FLEXIBLE ADHESIVE

ELECTRICAL:
CURRENT RATING: 5 AMPS
CONTACT RESISTANCE: 15 mOhms Max.
INSULATION RESISTANCE: 1,000 MOhms min.
VOLTAGE: 500VAC FOR 1 MINUTE
TEMPERATURE: -50° C TO 100° C

RoHS COMPLIANT

DO NOT SCALE FROM DRAWING


	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: PAM JENKINS		DATE: 06-29-09		
		CHECKED:		DATE:		
NorComp			SCALE: 1 : 1	SHEET 1	OF 4	REV 9
			DWG NO. 773-EYY-113RYY1			

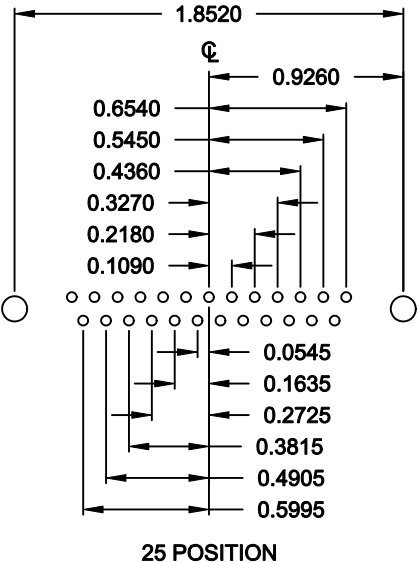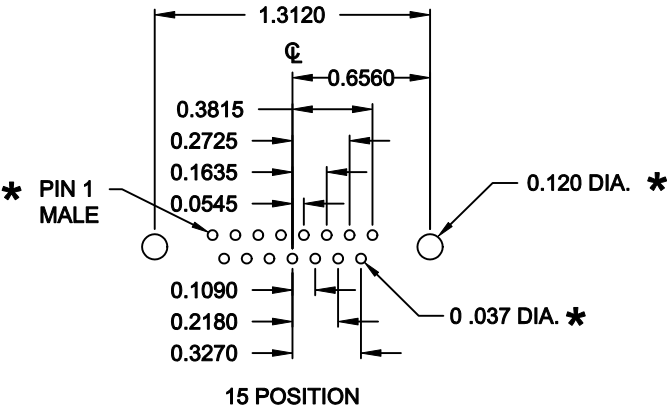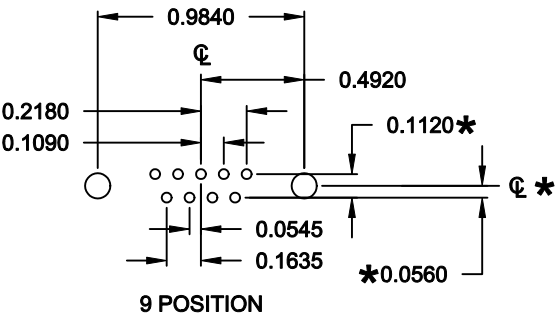

*** TYP. ON ALL SIZES**
UNLESS NOTED OTHERWISE

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.			DRAWN: PAM JENKINS		DATE: 06-29-09	
				CHECKED:		DATE:	
				SCALE: FULL		SHEET 2 OF 4	
				DWG NO. 773-EYY-113RYY1		REV 9	

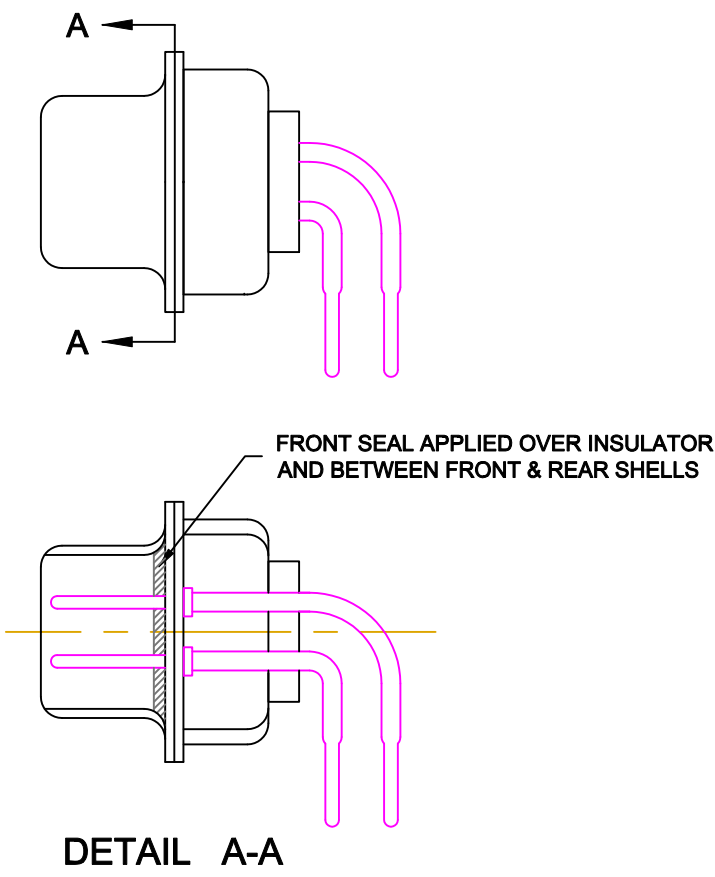



DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: C. SMITH		DATE: 06-10-09	
		CHECKED:		DATE:	
NorComp	SCALE: 2.5 : 1	SHEET 3		OF 4	REV 9
	DWG NO. 773-EYY-113RYY1				


HARDWARE OPTIONS 14 = SHORT BRACKET & 4-40 SCREW LOCK

01 CLINCH NUT OPTION

01X 0.065" (BOARD SIDE) - CN1

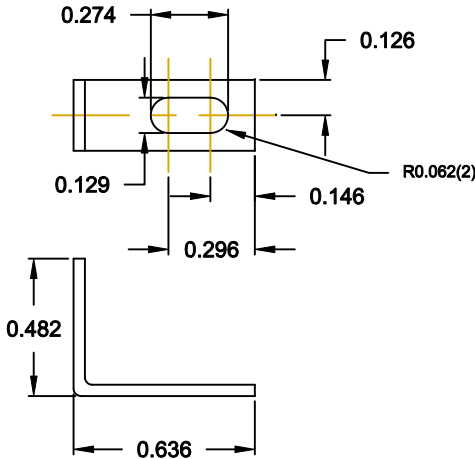



MOUNTING BRACKET

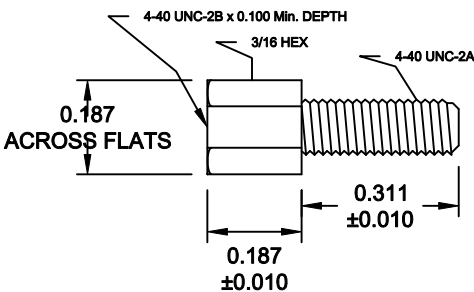


SCREW LOCK


46 = BRACKET WITH 4-40 INSERT AND BOARDLOCK

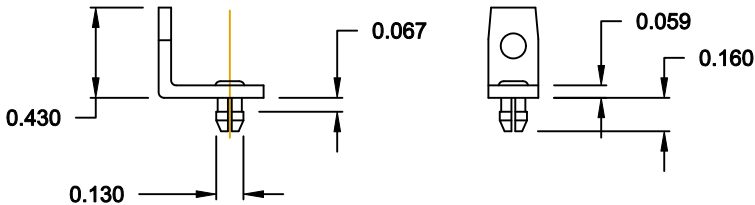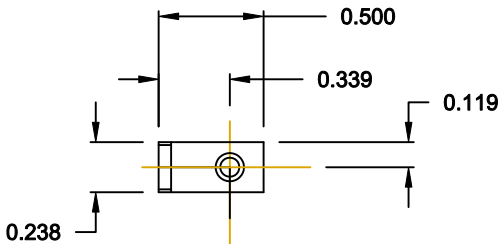

MOUNTING BRACKET WITH BOARD LOCK

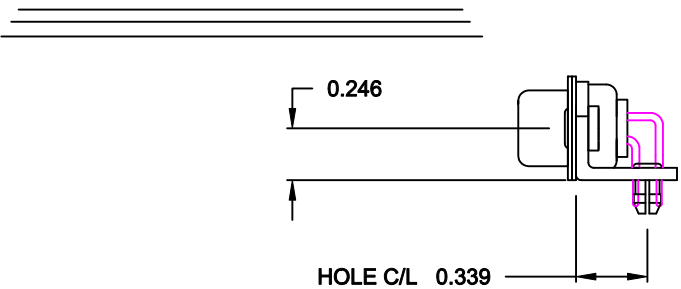

HOLE C/L 0.339



BRACKETS MOUNTED ON CONNECTOR

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: C. SMITH		DATE: 06-10-09	
		CHECKED:		DATE:	
	SCALE: N.T.S.		SHEET 4 OF 4		REV 9
	DWG NO. 773-EYY-113RYY1				

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com