

2.5–2.69 GHz US-WiMAX Ceramic Chip Antenna

Ground cleared under antenna. *Pulse Part Number: W3020*



Features

- Omnidirectional radiation
- Low profile
- Compact size W x L x H (3.2 x 1.6 x 1.1 mm)
- Low weight (33 mg)
- Fully SMD compatible
- Lead free soldering compatible
- Tape and reel packing
- RoHS compliant

Applications

- Devices using WiMAX
- 2.5–2.69 GHz

Engineering samples available Q4/2006

Electrical specifications @ +25 °C

Note: Electrical characteristics depend on test board (GP) size and antenna positioning on GP and Ground Clearance area size.

US-WiMAX 2.5-2.69 GHz

Typical performance (testboard size 80 x 35 mm, PWB ground clearance area 4.0 x 6.25 mm)

Frequency Range [MHz]	Max Gain [dBi]	Efficiency [%] / [dB]	Return Loss min. [dB]	Impedance [Ω]	Operating Temperature [°C]
2500 – 2690	2.8 (peak) 1 (band edges)	80 / -1 (peak) 60 / -2.25 (band edges)	-5.5	50	-40 to +85

Pulse Antennas

Takatie 6
90440 Kempele, Finland
Tel: +358 207 935 500
Fax: +358 207 935 501
www.pulseeng.com/antennas

2.5–2.69 GHz US-WiMAX Ceramic Chip Antenna

Ground cleared under antenna

Typical Electrical Characteristics (T=25 °C)

Typical Return Loss S11/ impedance, measured on the test board

WiMAX 2.6 GHz


19 Oct 2006 13:44:11

CH1Markers

1. -6.7176 dB 2.50000 MHz
2. -17.209 dB 2.600.000 000 MHz
3. -6.7182 dB 2.69000 GHz

CH1 S11&MLOG 5 dB/REF 0 dB

PRm
Cor

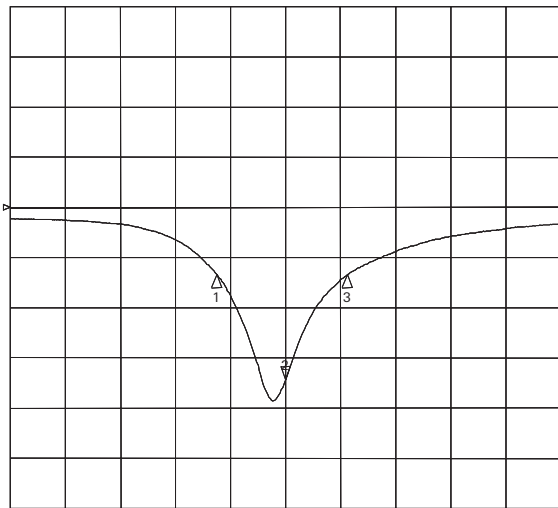

CENTER 2 600.000 000 MHz

SPAN 800.000 000 MHz


WiMAX 2.6 GHz

10 Oct 2006 13:45:54

CH1Markers

1. 90.996 Ω 56.090 Ω 2.50000 GHz
2. 41.742 Ω -9.4199 Ω 6.4983 pF
3. 18.850 Ω 6.4639 Ω 2.69000 GHz

CH1 S11 & M1 U FS
PRm
Del
Cor

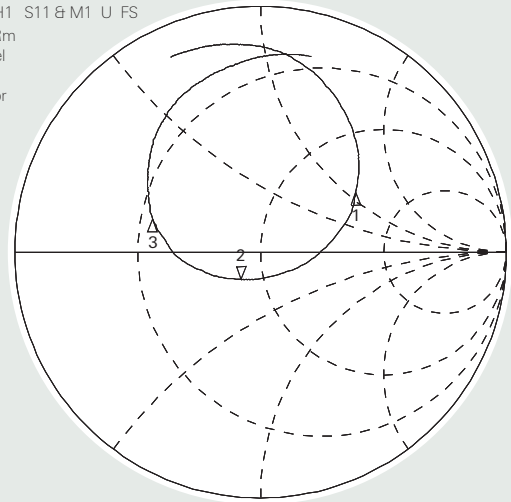


CENTER 2 600.000 000 MHz


SPAN 800.000 000 MHz

Free space efficiency and maximum gain

WiMAX 2.5–2.69 GHz

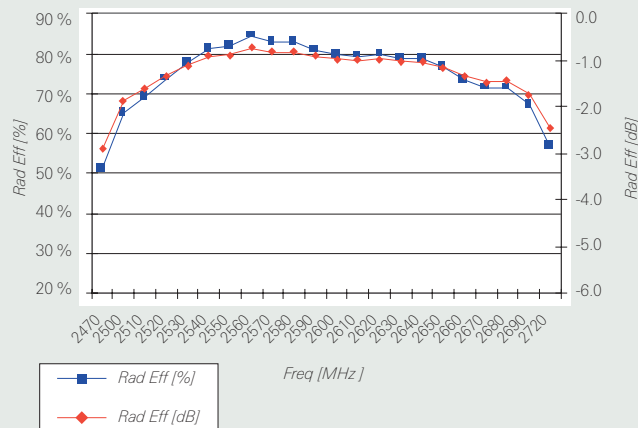

WiMAX 2.5–2.69 GHz

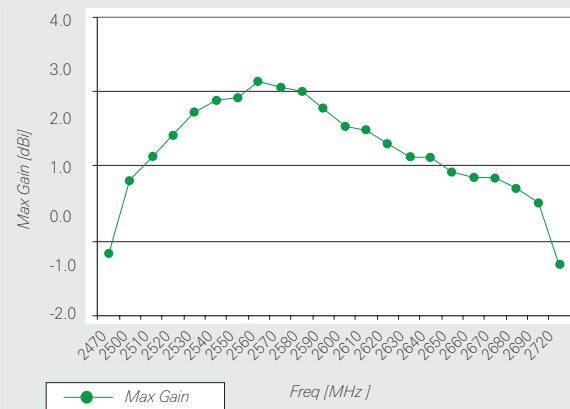

Pulse Antennas

Takatie 6

90440 Kempele, Finland

Tel: +358 207 935 500





Fax: +358 207 935 501

www.pulseeng.com/antennas

2.5–2.69 GHz US-WiMAX Ceramic Chip Antenna

Ground cleared under antenna, clearance area 4.00 x 6.25 mm

Typical Free Space Radiation Patterns

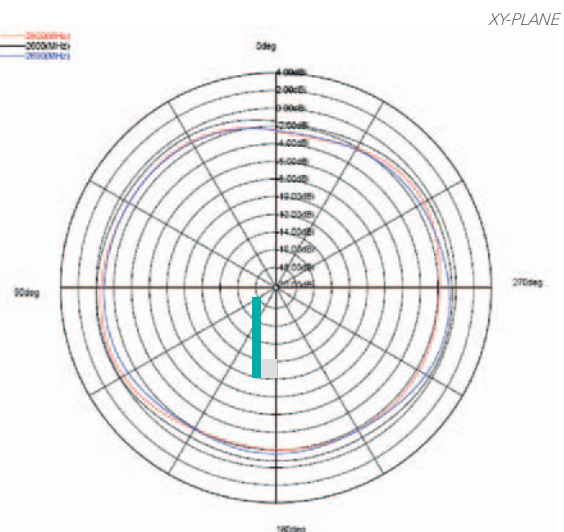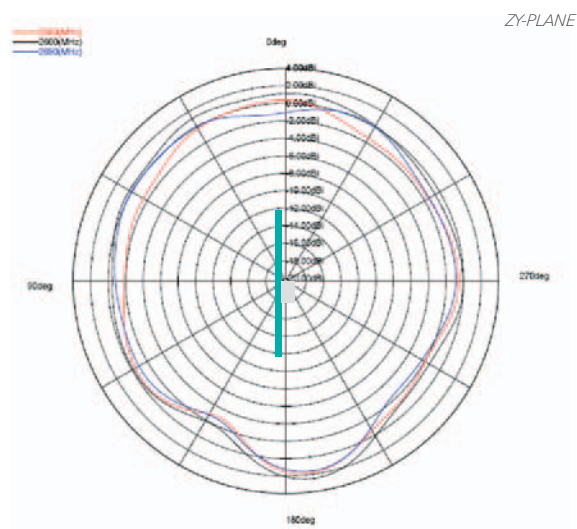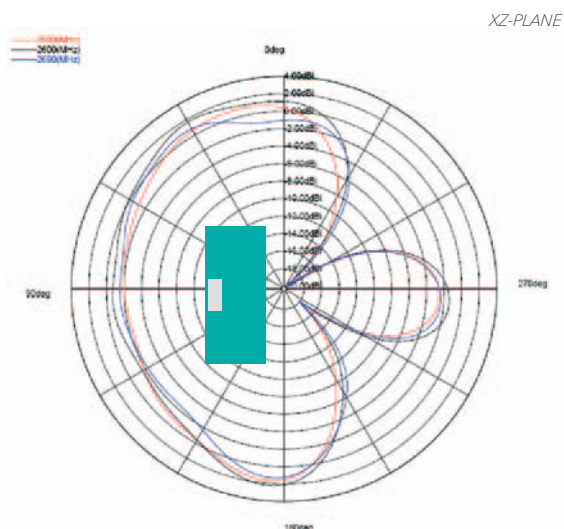

Pulse Antennas

Takatie 6

90440 Kempele, Finland

Tel: +358 207 935 500

Fax: +358 207 935 501

www.pulseeng.com/antennas

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com