
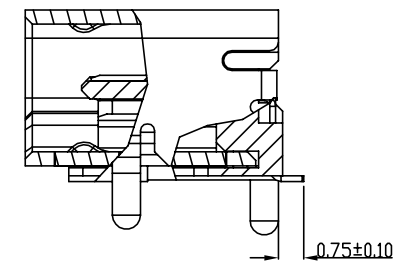
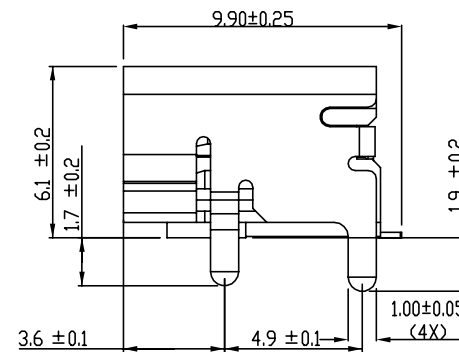
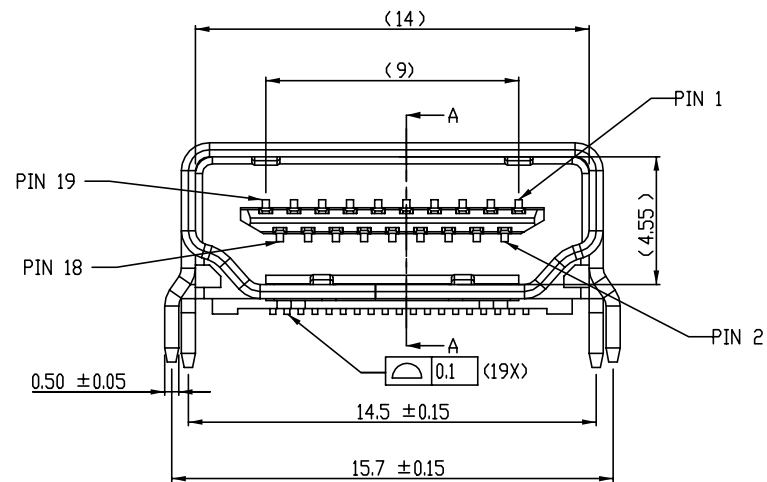









PRODUCT NO.
10029449-X01XLF

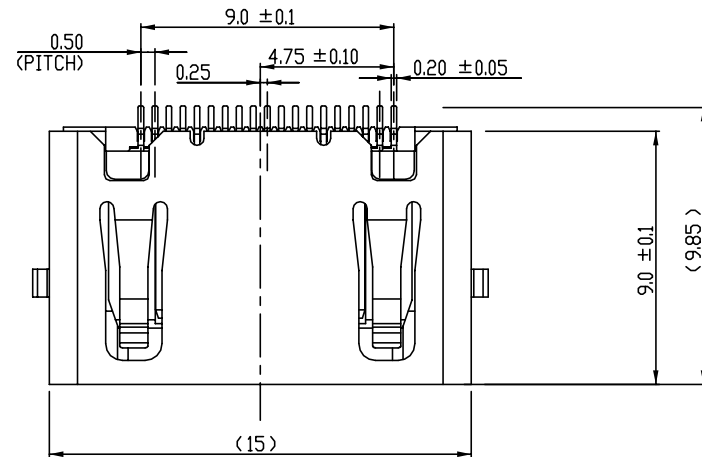

SECTION A-A

mat'l. code				surface		tolerance	projection	product family	
ltr ecn nodr date				ISO1302		ISO1101 ISO406		HDMI	
						tolerances unless otherwise specified			
M	N09-0307	SH	10/21/09	angle of projection	1st	.X±0.3	MM	HDMI TYPE A RECEPTACLE	
N	N10-0033	SH	02/01/10			.XX±0.15			
P	N10-0201	KW	2011-02-14			.XXX±0.05	scale 4.0		
R	N12-0001	SH	2012-02-23	dr	LEIF SHEN	10/15/04		dwg no	sheet 1 of 5
S	N12-0003	AZH	2012-06-13	enr	LEIF SHEN	10/15/04		10029449	A4
				chr	PAUL WANG	10/15/04			
				app	JOSEPH HSIA	10/15/04			
sheet	revisions	s	s	s	s				
index	sheet	1	2	3	4	5			

PRODUCT NO.
10029449-002XLF

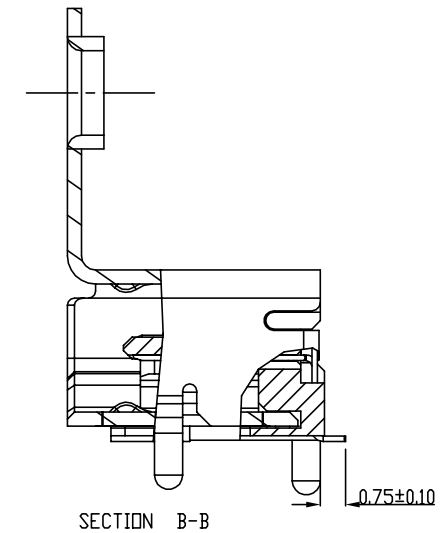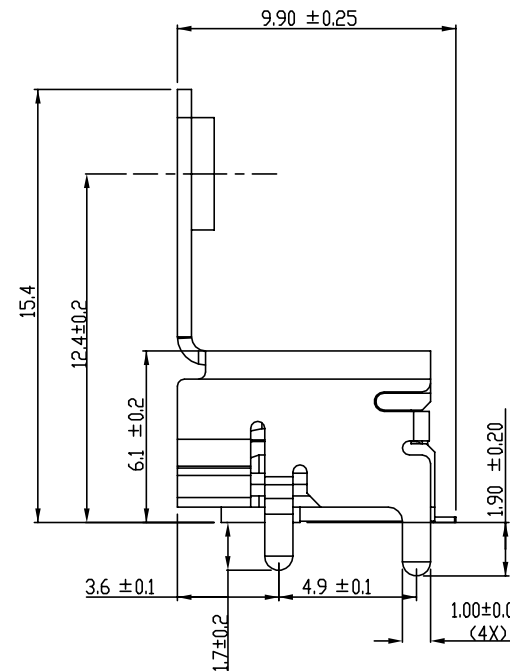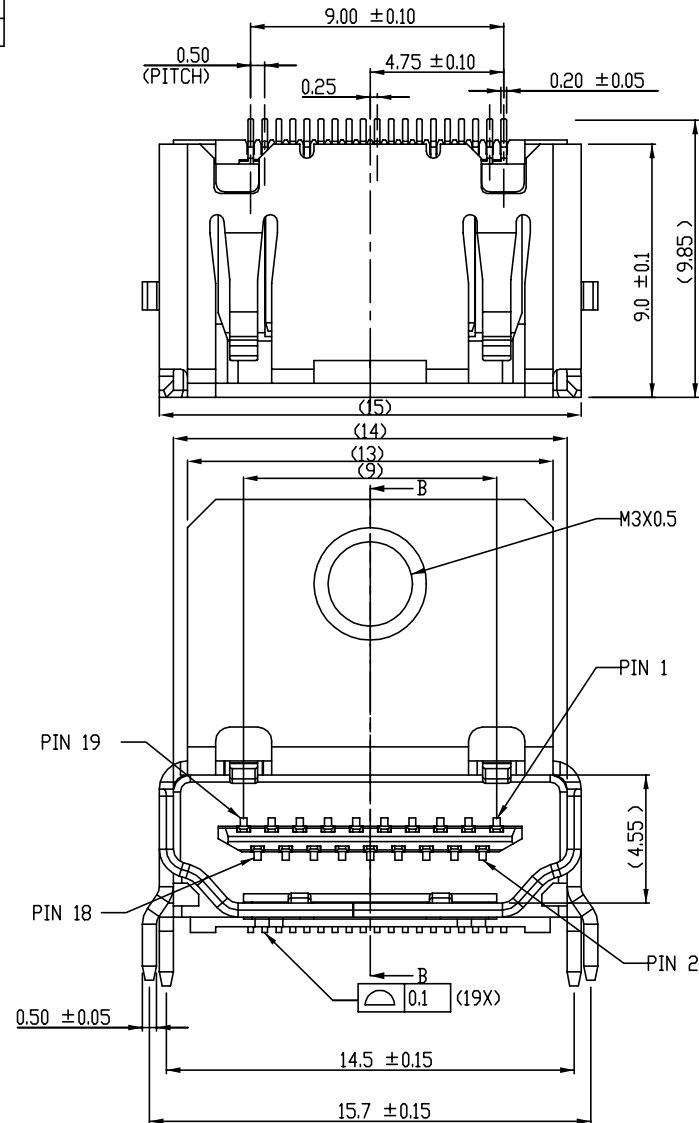






mat'l. code				surface		tolerance		projection		product family				
				ISO1302 ✓		ISO1101 ISO406				HDMI				
ltr		ecn	nodr	date		tolerances unless otherwise specified			title					
M	N09-0307	SH	10/21/09	angle	linear	.X±0.3				HDMI TYPE A RECEPTACLE				
N	N10-0033	SH	02/01/10			.XX±0.15								
P	N10-0201	KW	2011-02-14			.XXX±0.05								
						scale 4.0								
R	N12-0001	SH	2012-03-08	dr	LEIF SHEN	10/15/04				dwg no		sheet 2 of 5		size
S	N12-0003	AZH	2012-06-13	engr	LEIF SHEN	10/15/04				10029449		A4		
				chr	PAUL WANG	10/15/04								
				app	JOSEPH HSIA	10/15/04								
sheet		revision												
index		sheet												

[illegible]

6. PARTS MEET REFLOW APPLICATION PEAK TEM. 260°C, 10 SECONDS MAX.







Printed: Jun 15, 2012⁴

NOTE:

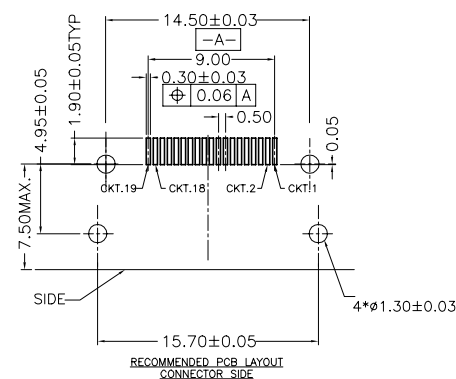

form: A4mmXLc

PRODUCT NO.	CONTACT AREA PLATING	SHIELD FIGURE	PACKING
10029449-112TLF	GOLD FLASH 3u" MIN	WITH FLANGE	TRAY

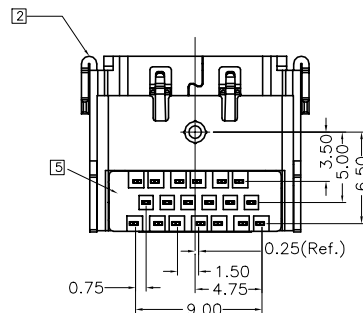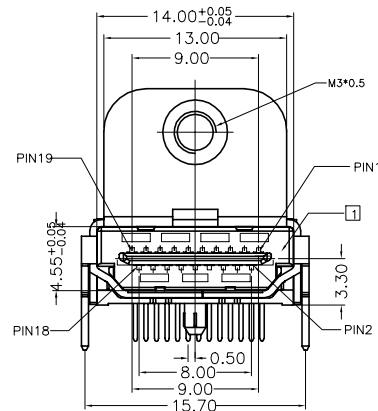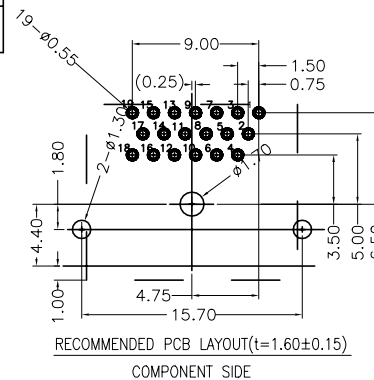

NOTE:

1.MECHANICAL CHARACTERISTICS

INSERTION FORCE: 44.1N MAX

WITHDRAWAL FORCE: 9.8N MIN, 39.2N MAX

MATING CYCLE:10000 CYCLES

CONTACT PULL OUT FORCE: 1.96N/PIN MIN

2.ELECTRICAL CHARACTERISTICS

RATING CURRENT: 0.5A

RATING VOLTAGE: 40V

CONTACT RESISTANCE: 10 MILLOHMS OHMS MAX
(EXCLUDING CONDUCTOR RESISTANCE)

INSULATION RESISTANCE:

a, UNMATED: 100M OHMS MIN AT 500 VDC

b, MATED: 10M OHMS MIN AT 150 VDC

DIELECTRIC WITHSTANDING VOLTAGE: 300V AC/1MINUTE

OPERATING TEMPERATURE: -20°C--+85°C

STORAGE TEMPERATURE: -20°C--+65°C

mat'l. code				surface		tolerance		projection		product family	
				ISO1302 ✓		ISO1101 ISO406				HDMI	
ltr		ecn		nodr		date		tolerances unless otherwise specified		title	
M	N09-0307		SH	10/21/09		angle	.0±0.3			HDMI TYPE A RECEPTACLE	
N	N10-0033		SH	02/01/10			.00±0.15				
P	N10-0201		KW	2011-02-14			.000±0.05				
R	N12-0001		SH	2012-03-09		dr	LEIF SHEN	10/15/04		dwg no	
S	N12-0003		A.ZH	2012-06-13		engr	LEIF SHEN	10/15/04		sheet 5 of 5	
						chr	PAUL WANG	10/15/04		size	
						app	JOSEPH HSIA	10/15/04		A4	
										type	
										Product Customer Drawing	
sheet		revision									
index		sheet									

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com