


SINGLE-SUPPLY DUAL COMPARATOR

■ FEATURES


- Operating Temperature $-40^{\circ}\text{C} \leq T_a \leq +125^{\circ}\text{C}$
- Operating Voltage $(+2\text{V} \sim +36\text{V})$
- Single Supply Operation
- Open Collector Output
- High Output Sink Current
- Package Outline VSP8
- Bipolar Technology

■ PACKAGE OUTLINE



NJM2903R

■ PIN CONFIGURATION




NJM2903R

PIN FUNCTION

- 1.A OUTPUT
- 2.A -INPUT
- 3.A +INPUT
- 4.GND
- 5.B +INPUT
- 6.B -INPUT
- 7.B OUTPUT
- 8.V⁺

■ EQUIVALENT CIRCUIT (1/2 Shown)

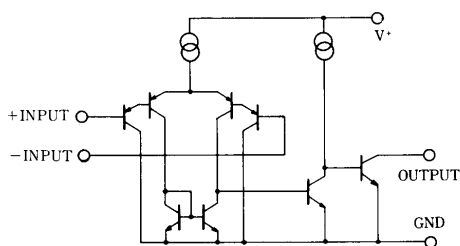

Automotive NJM2903

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V ⁺	36 (or ±18)	V
Differential Input Voltage	V _{ID}	36	V
Input Voltage	V _{IN}	-0.3~+36	V
Power Dissipation	P _D	495	mW
Operating Temperature Range	T _{opr}	-40~+125	°C
Storage Temperature Range	T _{stg}	-50~+150	°C

P_D : Mounted on glass epoxy board based on EIA/JEDEC STANDARD.

(76.2 × 114.3 × 1.6mm: FR4 2Layers)

■ ELECTRICAL CHARACTERISTICS







(V⁺=5V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Offset Voltage	V _{IO}	R _S =0Ω, V _O =1.4V	-	-	7	mV
Input Offset Current	I _{IO}		-	-	50	nA
Input Bias Current	I _B		-	30	250	nA
Input Common Mode Voltage Range	V _{ICM}		0	-	3.5	V
Large Signal Voltage Gain	A _V	R _L =15kΩ	-	106	-	dB
Response Time	t _R	R _L =5.1kΩ	-	1.5	-	μs
Output Sink Current	I _{SINK}	V _{IN} ⁻ =1V, V _{IN} ⁺ =0V, V _O =1.5V	6	-	-	mA
Output Saturation Voltage	V _{SAT}	V _{IN} ⁻ =1V, V _{IN} ⁺ =0V, I _{SINK} =3mA	-	200	400	mV
Output Leakage Current	I _{LEAK}	V _{IN} ⁻ =0V, V _{IN} ⁺ =1V, V _O =5V	-	-	1.0	μA
Operating Current	I _{CC}		-	0.4	1.0	mA

(V⁺=5V, Ta= -40°C ≤ Ta ≤ +125°C)


PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Offset Voltage	V _{IO}	R _S =0Ω, V _O =1.4V	-	-	14	mV
Input Offset Current	I _{IO}		-	-	50	nA
Input Bias Current	I _B		-	-	275	nA
Input Common Mode Voltage Range	V _{ICM}		0.5	-	3.0	V
Output Sink Current	I _{SINK}	V _{IN} ⁻ =1V, V _{IN} ⁺ =0V, V _O =1.5V	3	-	-	mA
Output Saturation Voltage	V _{SAT}	V _{IN} ⁻ =1V, V _{IN} ⁺ =0V, I _{SINK} =3mA	-	-	800	mV
Output Leakage Current	I _{LEAK}	V _{IN} ⁻ =0V, V _{IN} ⁺ =1V, V _O =5V	-	-	10	μA
Operating Current	I _{CC}		-	-	2.0	mA

■ TYPICAL CHARACTERISTICS

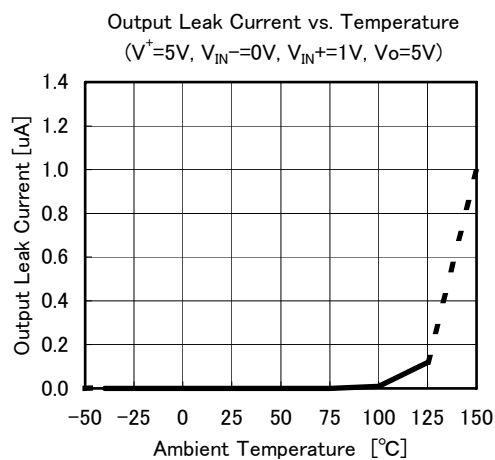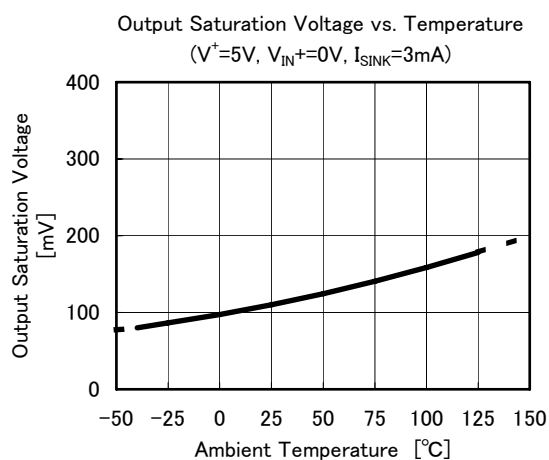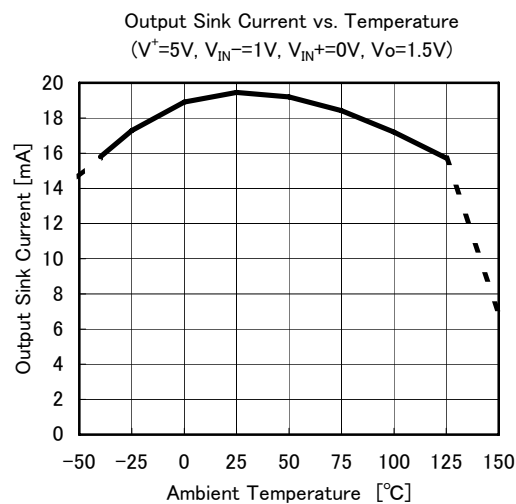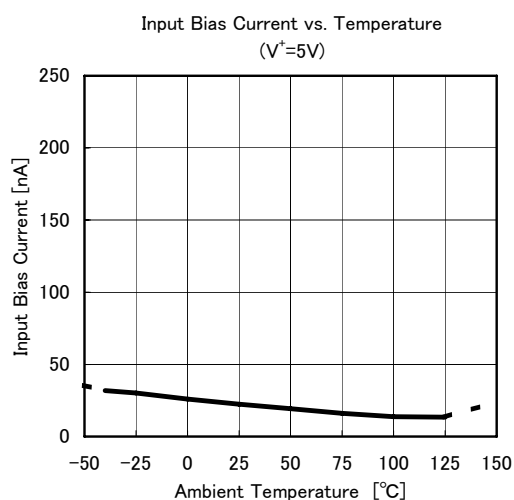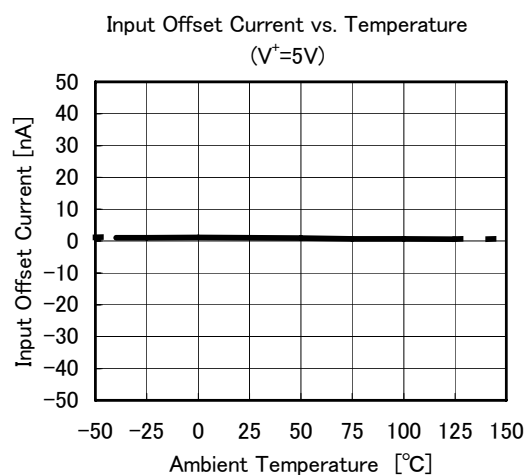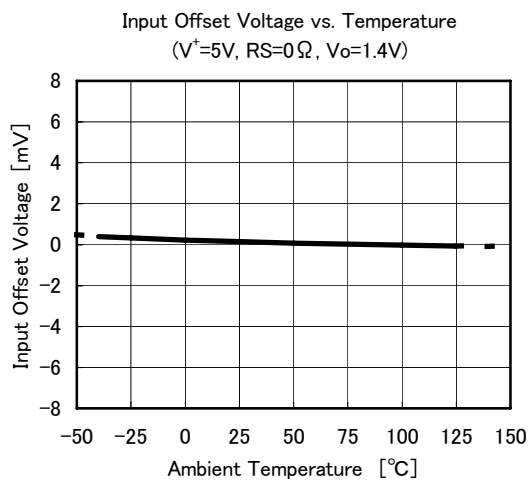

Automotive NJM2903


■ TYPICAL CHARACTERISTICS

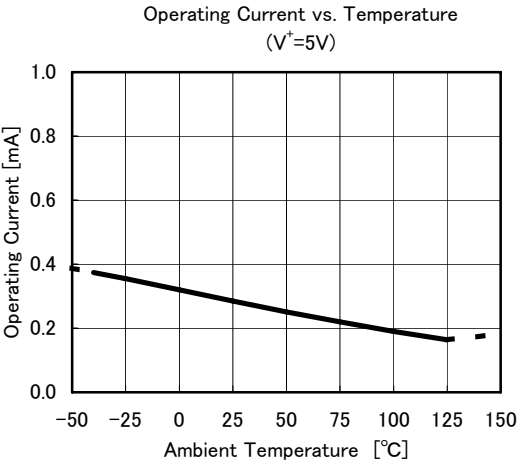

■ TYPICAL CHARACTERISTICS


Input Bias Current vs. Temperature

($V^+ = 5\text{ V}$)

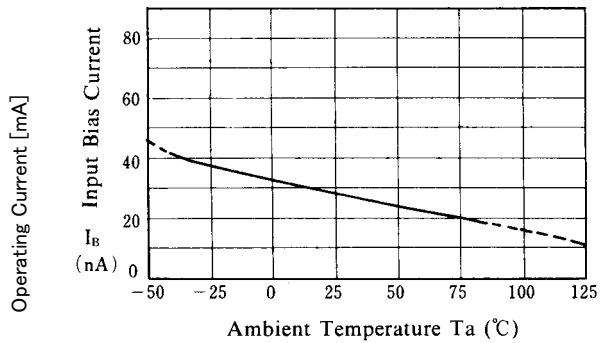


Input Offset Voltage vs. Temperature

($V^+ = 5\text{ V}$)

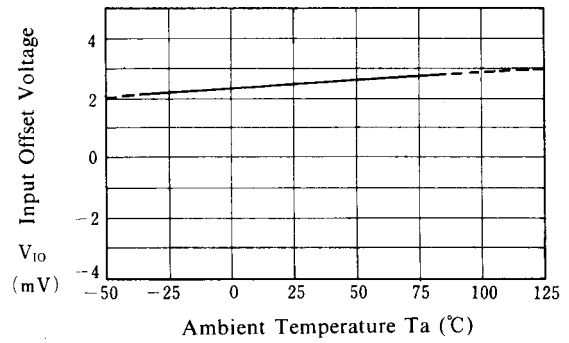


Operating Current vs. Operating Voltage

($T_a = 25^\circ\text{C}$)

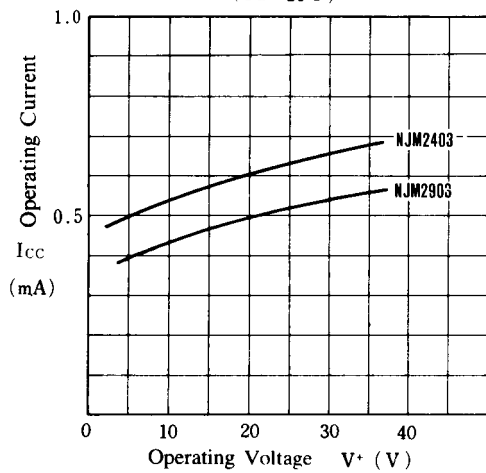


Input Bias Current vs. Operating Voltage

($T_a = 25^\circ\text{C}$)

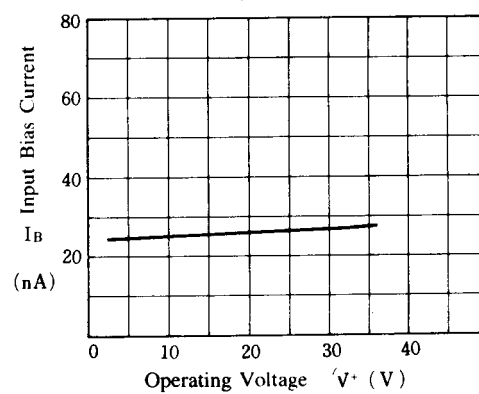




NJM2903 Output Saturation Voltage vs. Output Sink Current

NJM2903 ($V^+ = 5\text{ V}$)

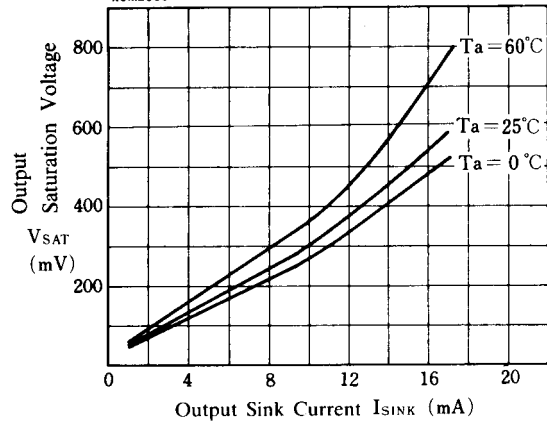


Automotive NJM2903

■ TYPICAL CHARACTERISTICS

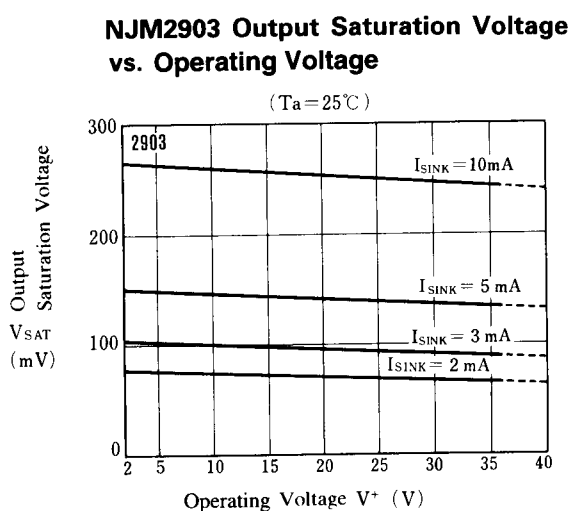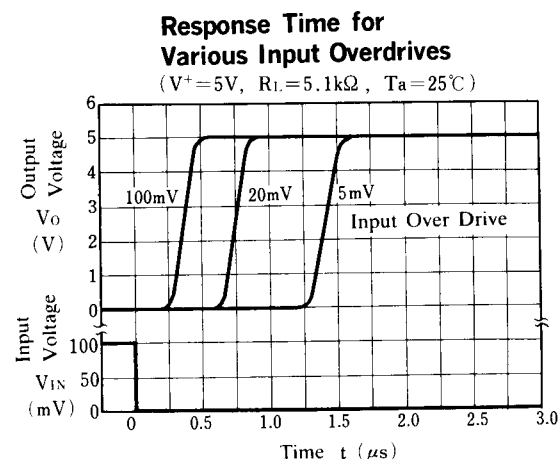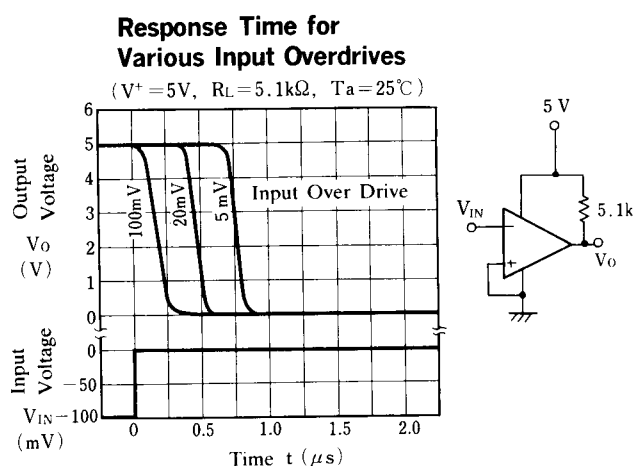


■ TYPICAL APPLICATIONS


Comparator With Hysteresis

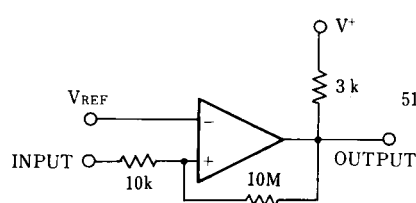

Pulse Generator






Output Strobing Circuit

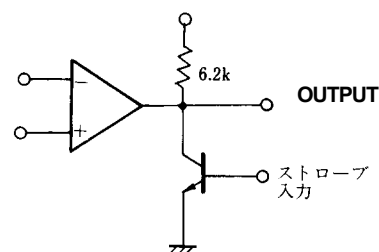

■ Package Dimensions

VSP8

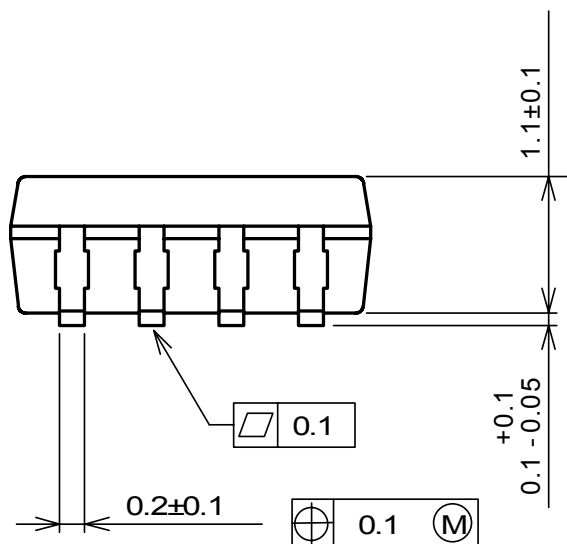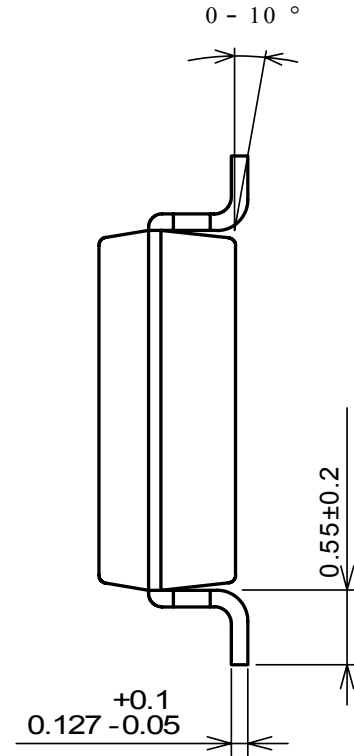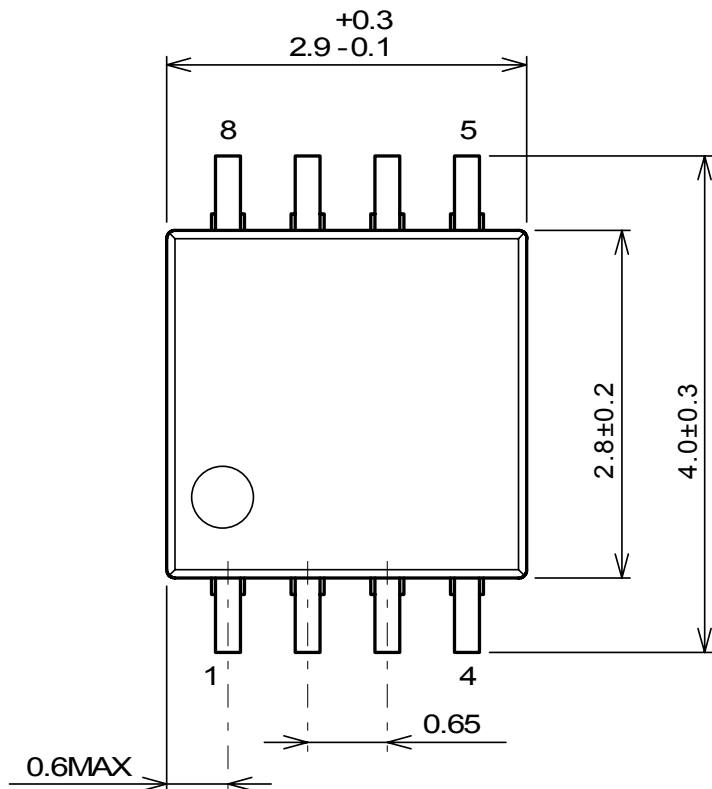

Unit :mm

[CAUTION]

The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com