

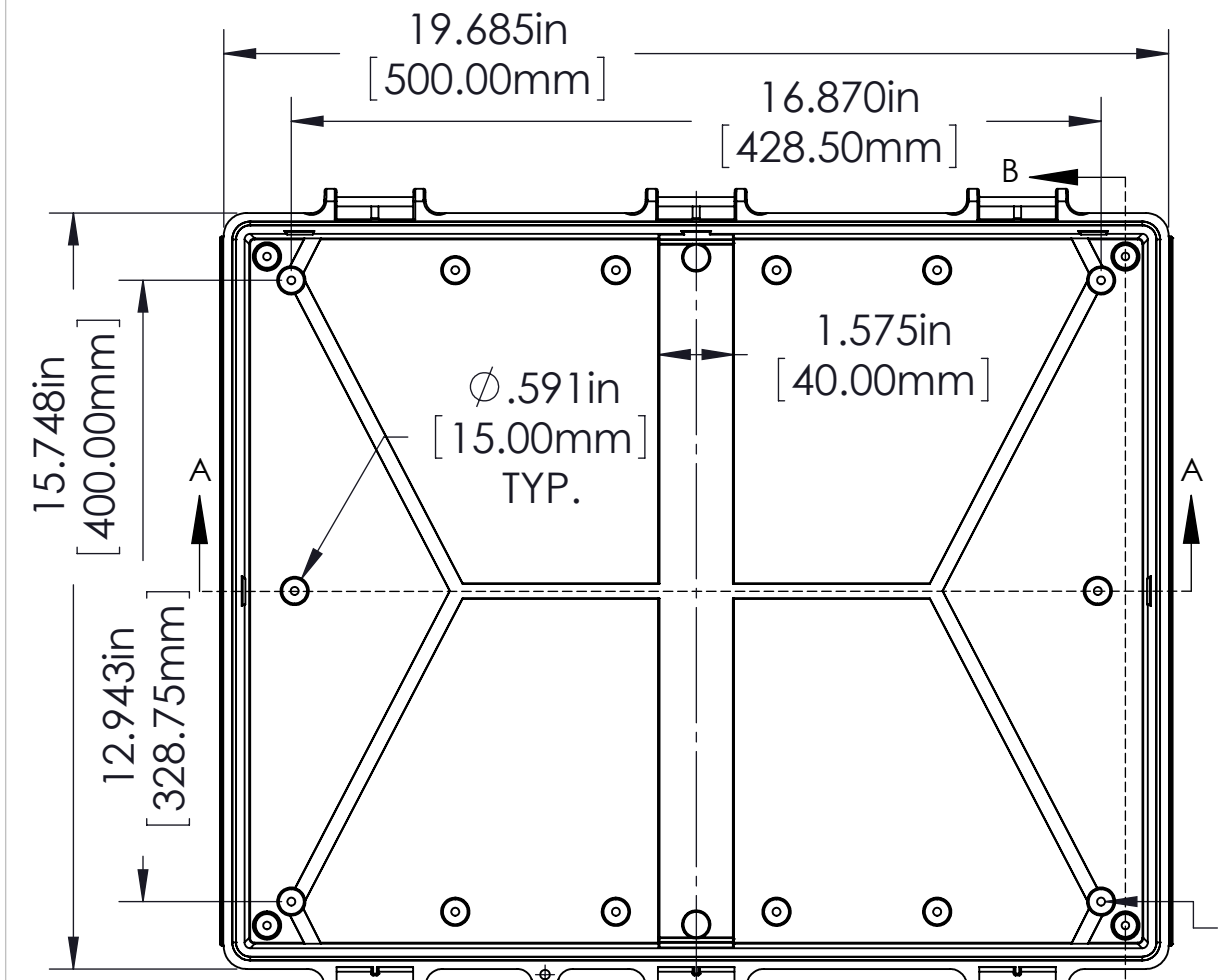


MATERIAL	FLAMMABILITY RATING	CONTINUOUS OPERATING TEMP.
ABS	UL94-HB	-40°C ~ +60°C / -40°F ~ 140°F
CLEAR PC	UL94-V0 UV STABILIZED	-40°C ~ +130°C / -40°F ~ 266°F
ABS / PC BLEND	UL94-5VA	-40°C ~ +85°C / -40°F ~ 185°F
PBT / PC BLEND	UL94-5VA + UV (f1)	-40°C ~ +75°C / -40°F ~ 167°F


FINISH:
BODY _____ LIGHT GRAY
COVER _____ LIGHT GRAY OR CLEAR
LATCHES & HINGES _____ PLASTIC
WALL MOUNTING BRACKETS__ STAINLESS STEEL & HARDWARE

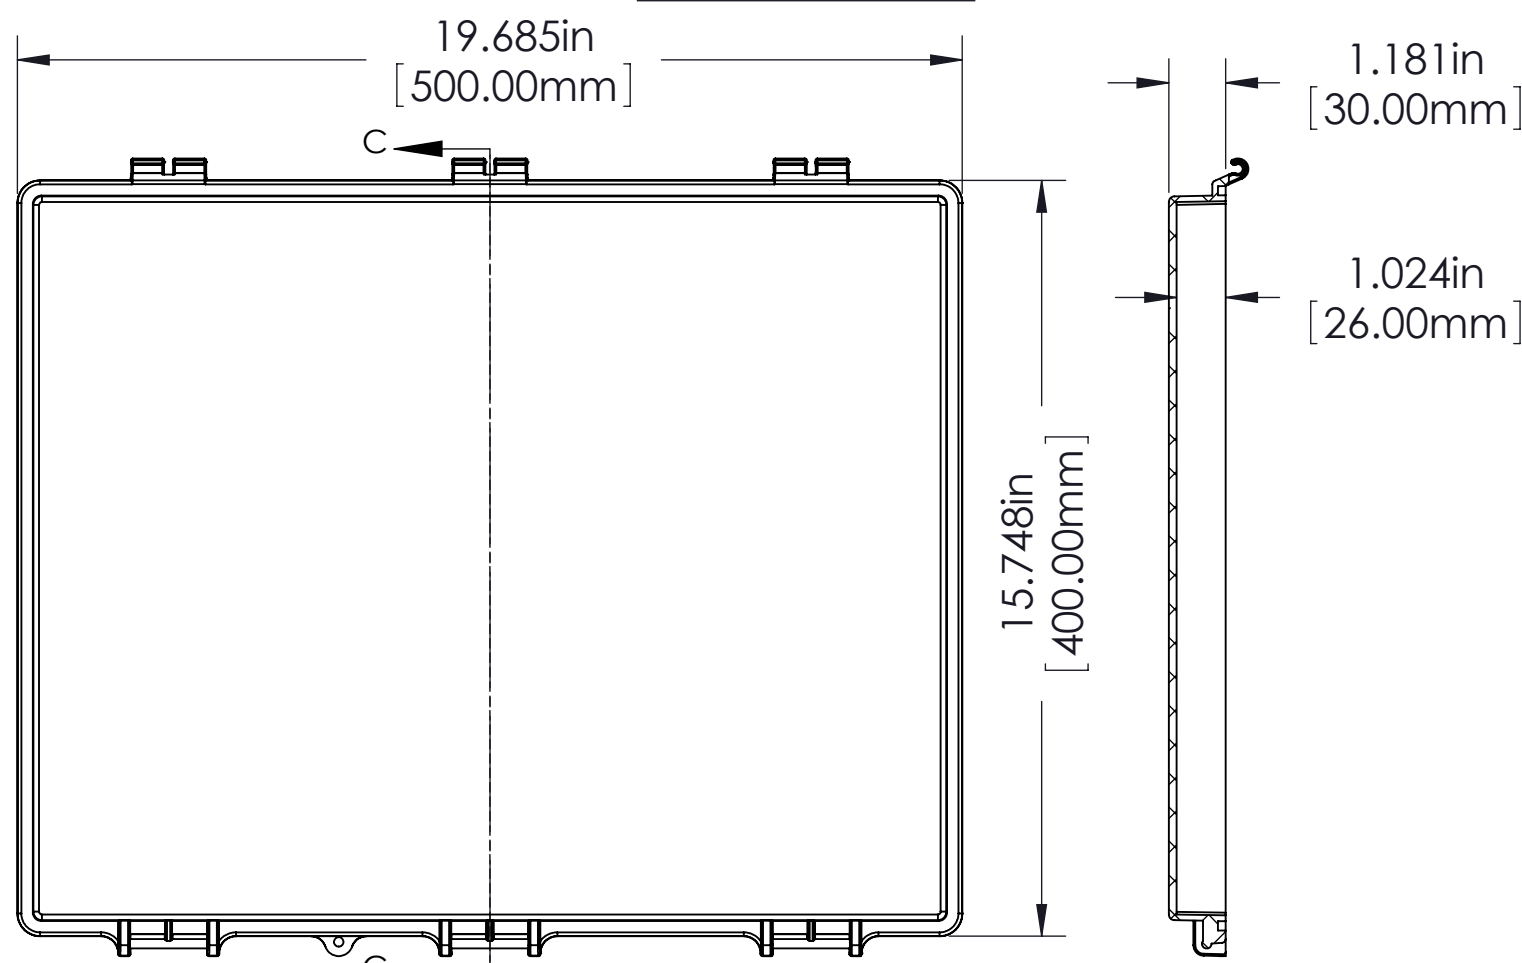


BODY

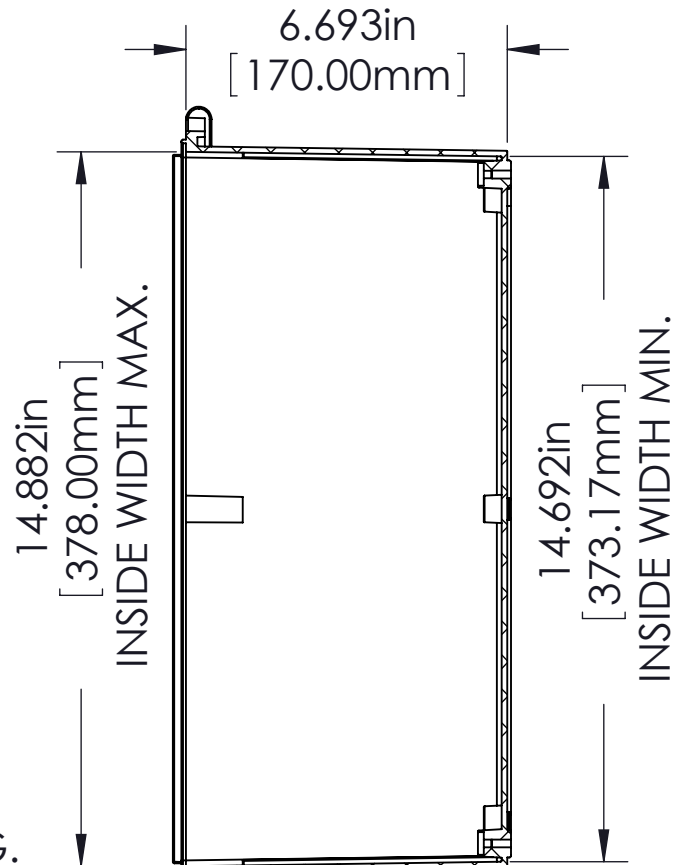


COVER

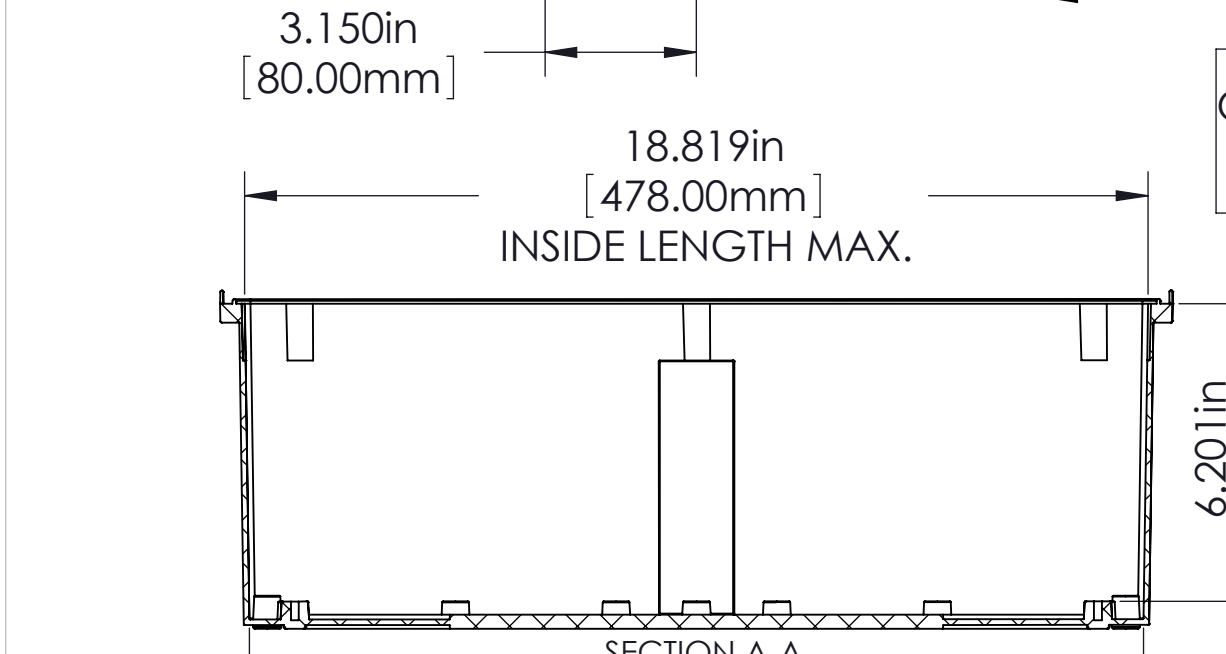


Ø.165in [4.20mm]
FOR M5 x 10mm LG. SELF-TAPPING SCREWS (ABS VERSIONS ONLY)
M5 THREADED INSERTS ON ALL OTHER VERSIONS
USE M5 x 8mm LG. MACHINE SCREWS.

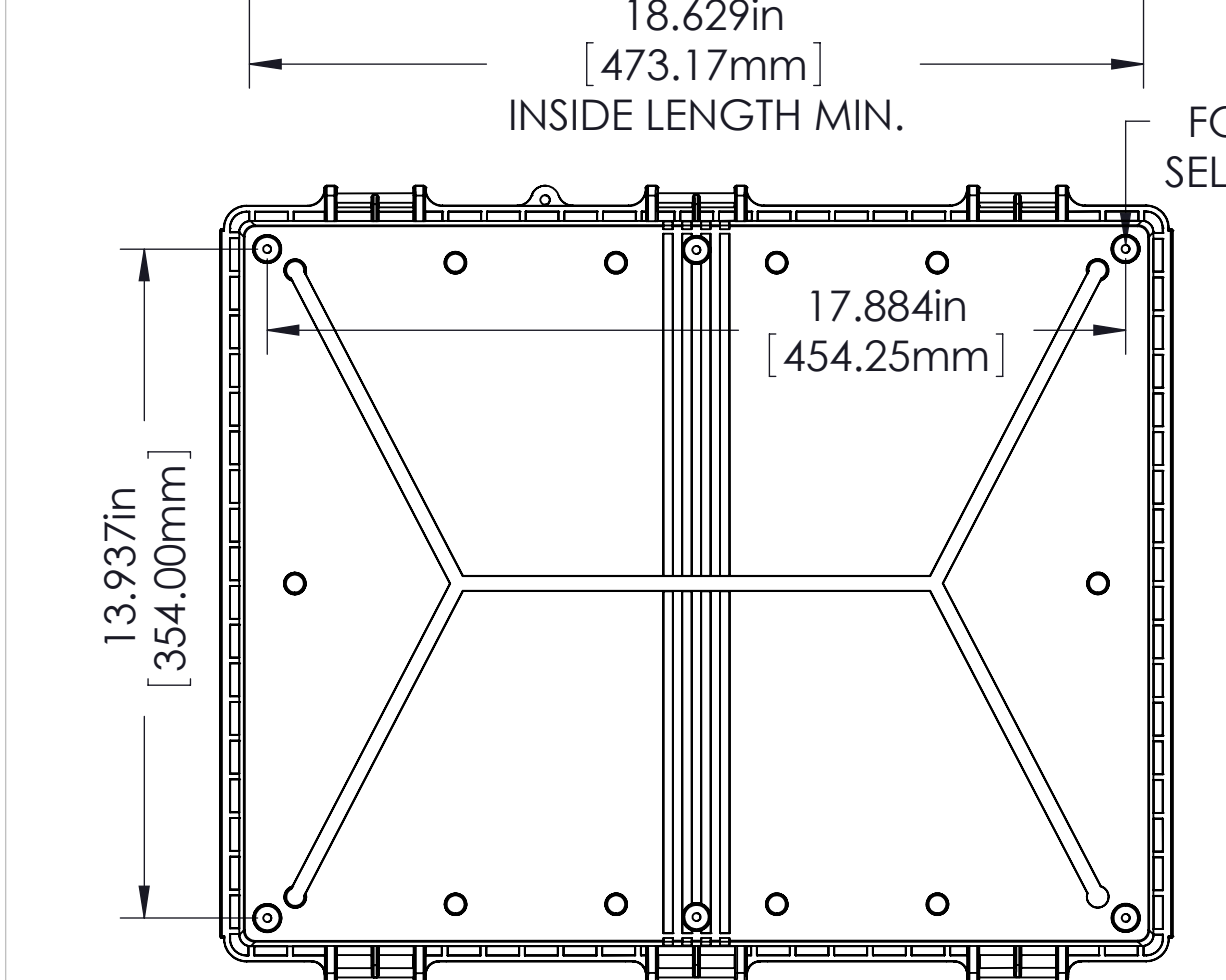

Ø.165in [4.20mm]
FOR M5 x 10mm LG. SELF-TAPPING SCREWS 4 PLCS.

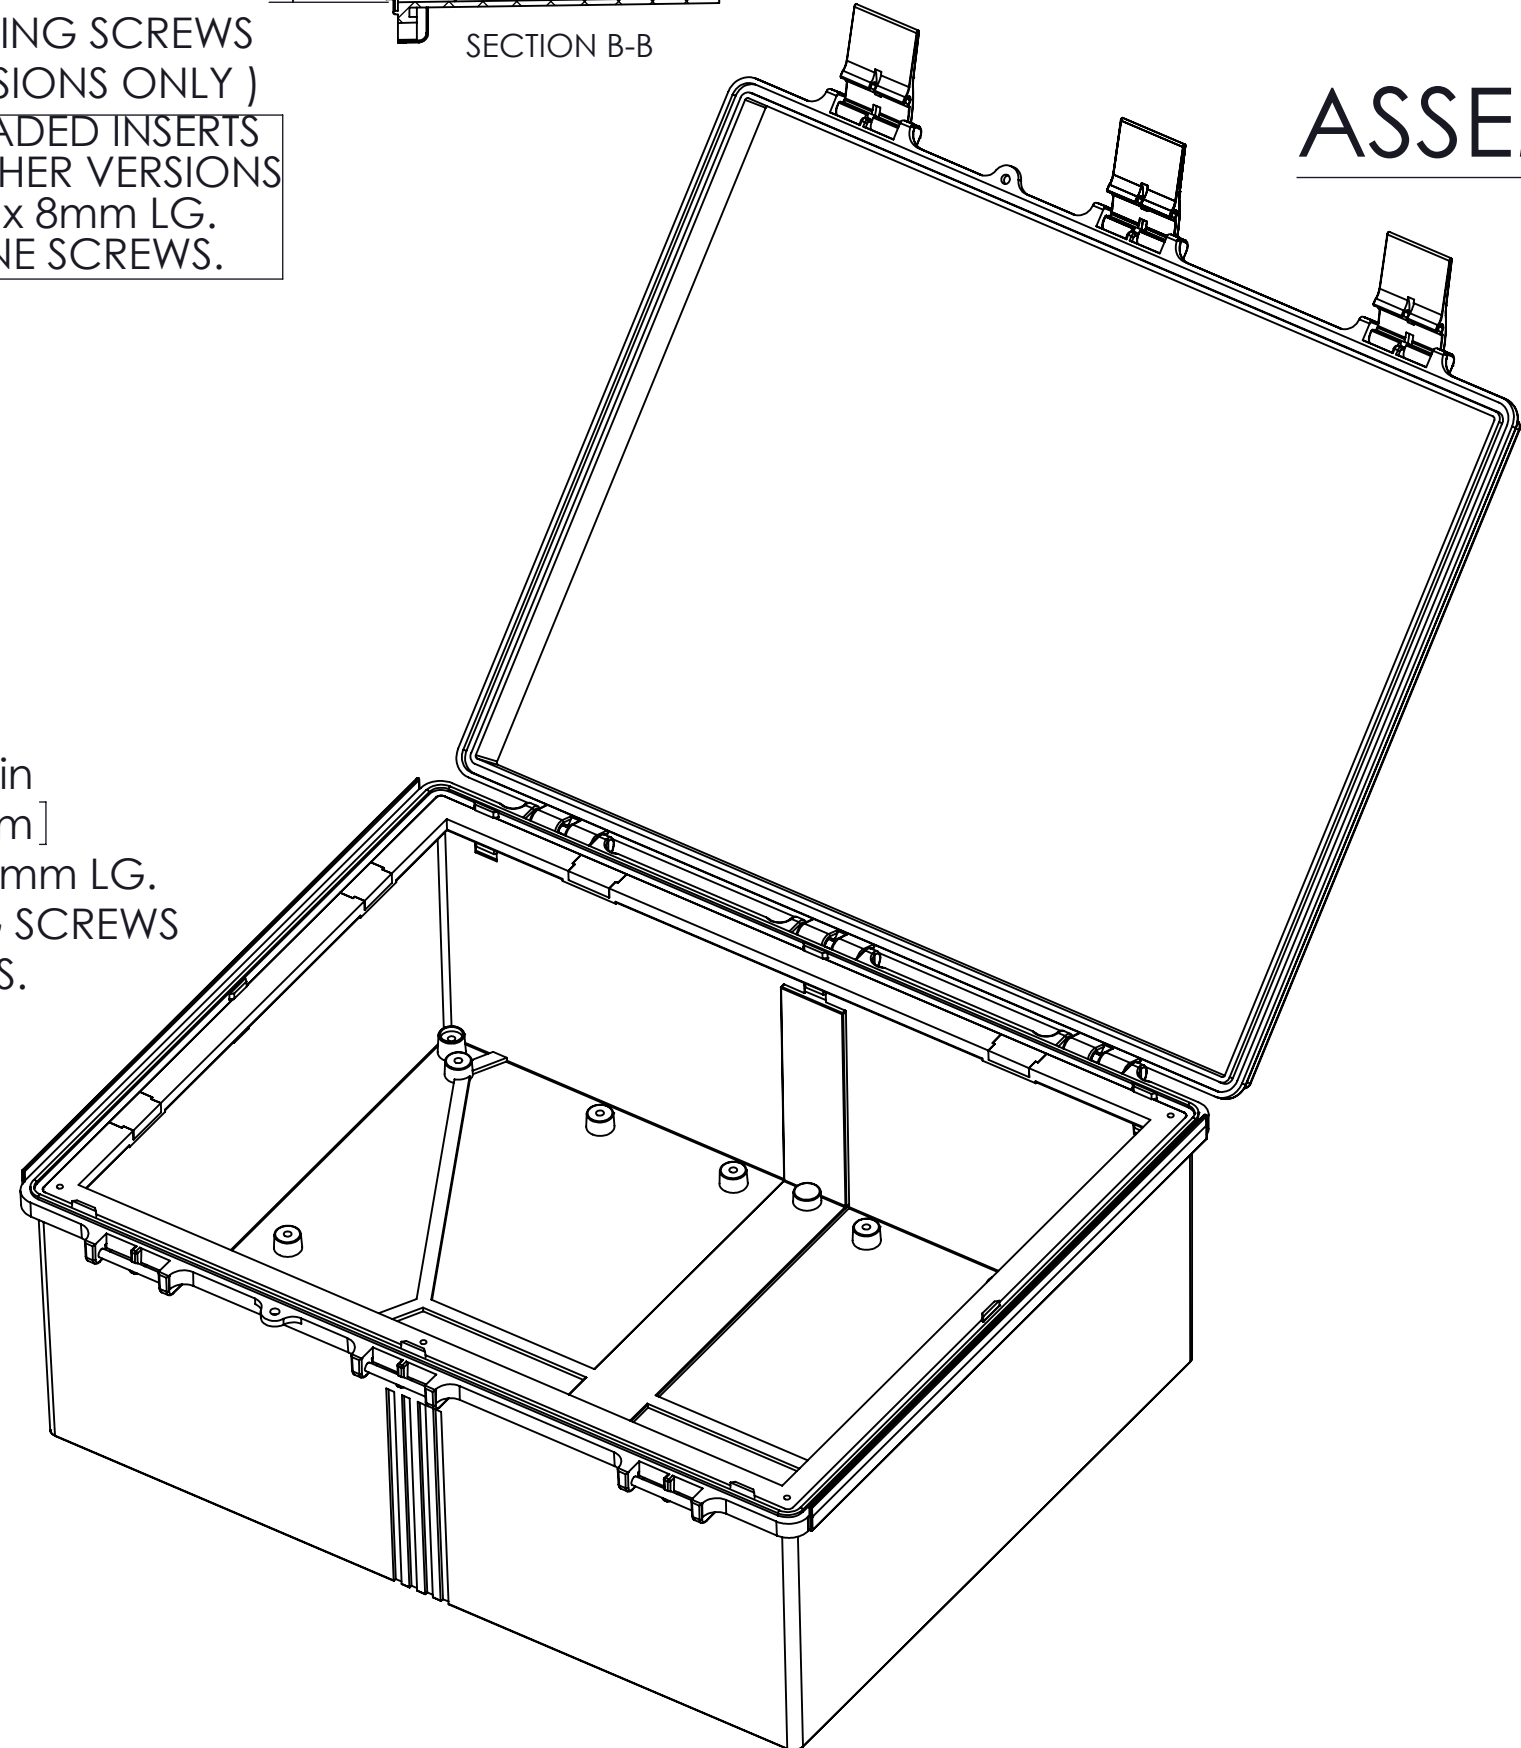

ASSEMBLY

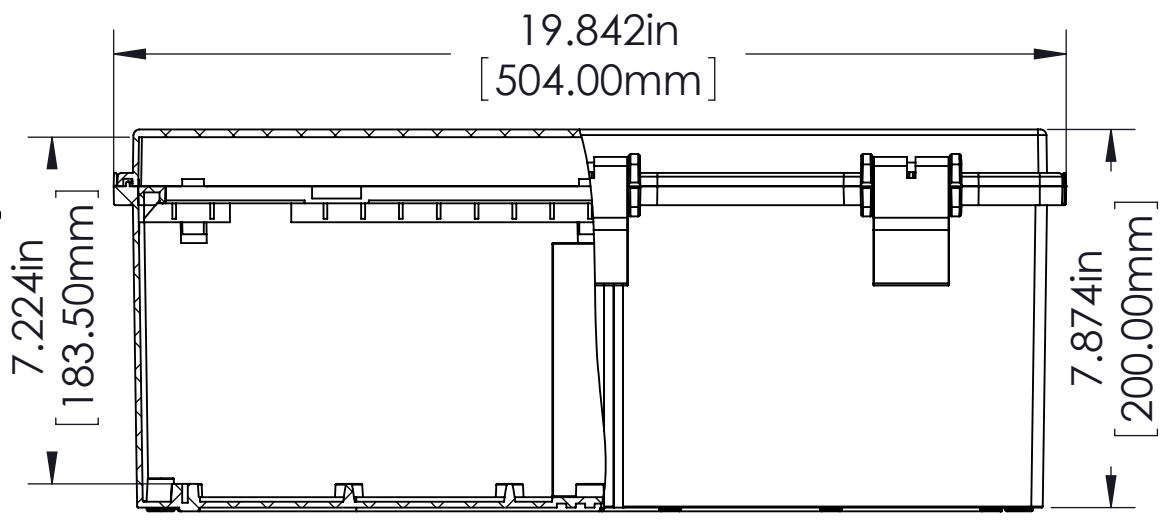

NOTES:
1) UNIT COMES COMPLETE WITH
(4) WALL MOUNTING BRACKETS &
(4) M4 x 10mm LG. SELF-TAPPING SCREWS.
(NOT SHOWN)
2) BOXES DESIGNED FOR THE FOLLOWING STANDARDS:
NEMA 1,2,4,4X, AND IEC529-IP65 REQUIREMENTS.
TOLERANCE:
ALL DIMENSIONS HAVE ±0.039in [±1mm]
TOLERANCE UNLESS OTHERWISE SPECIFIED.

PART NO.	MATERIAL		USE
	BODY	COVER	
NBF-32034	ABS	ABS	INDOOR
NBF-32134	ABS / PC	ABS / PC	INDOOR
NBF-32234	ABS / PC	CLEAR PC	INDOOR
NBF-32334	PBT / PC	PBT / PC	OUTDOOR
NBF-32434	PBT / PC	CLEAR PC	OUTDOOR

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :
401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :
Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :
Email service@ameya360.com

➤ Partnership :
Tel +86 (21) 64016692-8333
Email mkt@ameya360.com