

# Model 6180 series

## 7/8" Diameter

## Single Turn

## Conductive Plastic

## Precision Potentiometer /

## Position Sensor



### MODEL STYLES AVAILABLE

|                                 |                                 |
|---------------------------------|---------------------------------|
| 6181                            | 1/8" Shaft, 1/4" Bushing        |
| 6184                            | 6 mm Shaft, 3/8" Bushing        |
| 6186                            | 1/8" Shaft, 3/8" Bushing        |
| 6187                            | 1/4" Shaft, 3/8" Bushing        |
| 6188 for side load applications | 1/4" Shaft, 3/8" Bronze Bushing |

### ELECTRICAL<sup>1</sup>

|                                                        |                                             |
|--------------------------------------------------------|---------------------------------------------|
| Resistance Range                                       | 1K to 100K Ohms                             |
| Standard Resistance Tolerance                          | ±10%                                        |
| Minimum Practical Resistance Tolerance                 | ±5%                                         |
| Independent Linearity <sup>2</sup>                     | ±1%                                         |
| Minimum Practical Independent Linearity                | ±0.5%                                       |
| Input Voltage                                          | 400 VDC maximum, not to exceed power rating |
| Power Rating                                           | 1.0 Watt at 70°C, derating to 0 at 125°C    |
| Dielectric Strength                                    | 750 V rms                                   |
| Insulation Resistance                                  | 1,000 Megohms minimum                       |
| Output smoothness                                      | 0.1% maximum                                |
| Actual Electrical Travel                               | 340° nominal (300° with stop feature)       |
| Electrical Continuity Travel                           | 350° nominal (320° with stop feature)       |
| End Voltage                                            | maximum 0.5% of input voltage               |
| Resolution                                             | essentially infinite                        |
| Temperature Coefficient of Resistance <sup>3</sup>     | -400 ppm/°C typical                         |
| Temperature Coefficient of Output Voltage <sup>4</sup> | ±10 ppm/°C typical                          |

### MECHANICAL

|                             |                                              |
|-----------------------------|----------------------------------------------|
| Total Mechanical Travel     | 360° Continuous (320° ±3° with stop feature) |
| Number of Gangs             | 1 maximum                                    |
| Weight                      | 0.53 oz. nominal (single gang)               |
| Backlash                    | 1° maximum                                   |
| Static Stop Strength        | 40 oz.-in.                                   |
| Panel Nut Tightening Torque | 25 lb.-in. maximum                           |
| Start/Run Torque            | 1.0 oz.-in.                                  |

<sup>1</sup> Specifications subject to change without notice.

<sup>2</sup> Linearity is measured between 1% and 99% of input voltage.

<sup>3</sup> Special TCR available to ±100 ppm/°C.

<sup>4</sup> Measured with 10 VDC CW to CCW and slider at 50% of electrical travel




# Model 6180

## ENVIRONMENTAL (MIL-PRF-39023)

|                                     |                                                                     |
|-------------------------------------|---------------------------------------------------------------------|
| Operating Temperature Range         | -40°C to +125°C dynamic, -65°C to +125°C static                     |
| Temperature Cycling                 | 5 cycles, -65°C to +125°C, maximum 10% ΔR                           |
| Shock                               | 6 ms Saw-tooth, 100 G's, 0.1 ms maximum discontinuity               |
| Vibration                           | 10 G's, 10 to 500 Hz, maximum 2% ΔR, 0.1 ms maximum discontinuity   |
| Moisture Resistance                 | five 24 hour cycles, maximum 25% ΔR                                 |
| High Temperature Exposure           | 1,000 hours at 125°C, maximum 0.5% ΔV <sub>R</sub>                  |
| Rotational Life                     | 5 million shaft revolutions (no sideload, 6188 up to 8 oz sideload) |
| Rotational Load Life                | 5 million shaft revolutions, maximum 10% ΔR                         |
| Ingress Protection Rating (IP Code) | IP50, IP66 available as option (feature code ES)                    |

## ORDERING INFORMATION

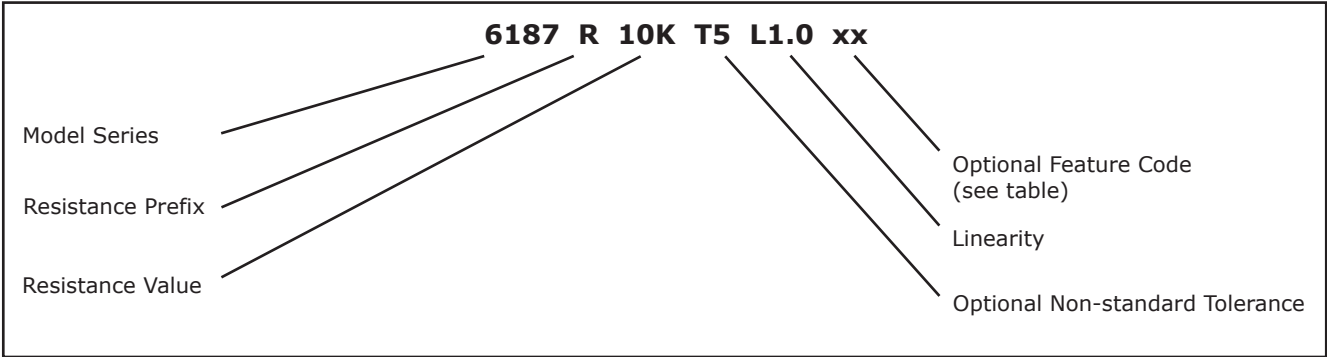


## FEATURE CODES

|                                      |    |
|--------------------------------------|----|
| Center Tap                           | CT |
| Linearity Tape                       | LT |
| Shaft Lock 6187 only                 | SL |
| Stop                                 | ST |
| Seal (IP66) 6184, 6187, or 6188 only | ES |

When multiple feature codes are used the P/N shall be in the same sequence as listed in this table (top to bottom).

## CIRCUIT DIAGRAM

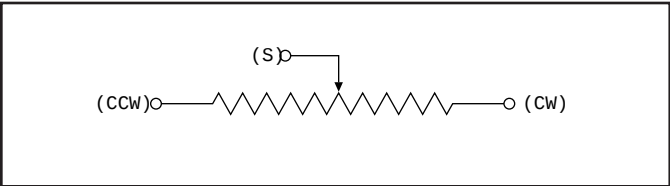


## STANDARD RESISTANCE VALUES

|    |    |    |     |     |     |
|----|----|----|-----|-----|-----|
| 1K | 2K | 5K | 10K | 20K | 50K |
|----|----|----|-----|-----|-----|


# Model 6180

## OUTLINE DRAWING

### Model 6181

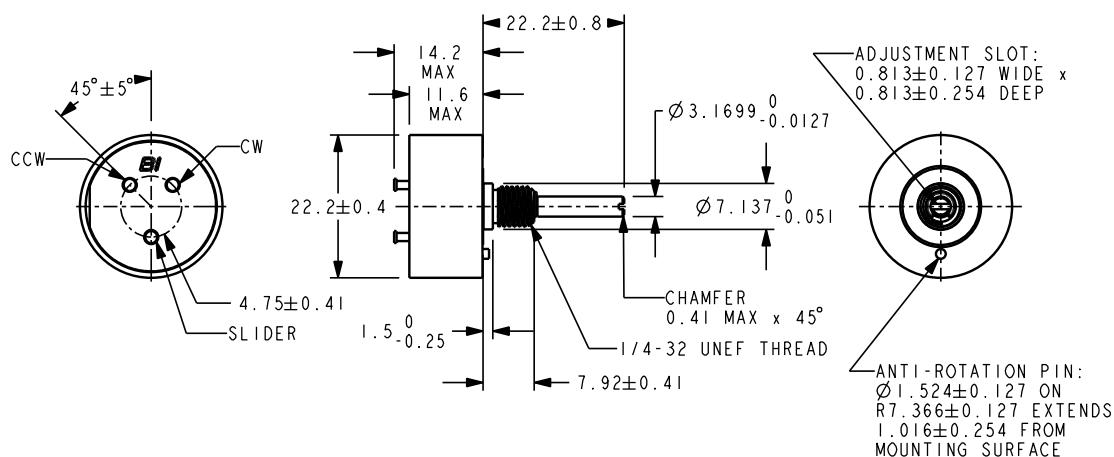

### Models 6184, 6186, and 6187

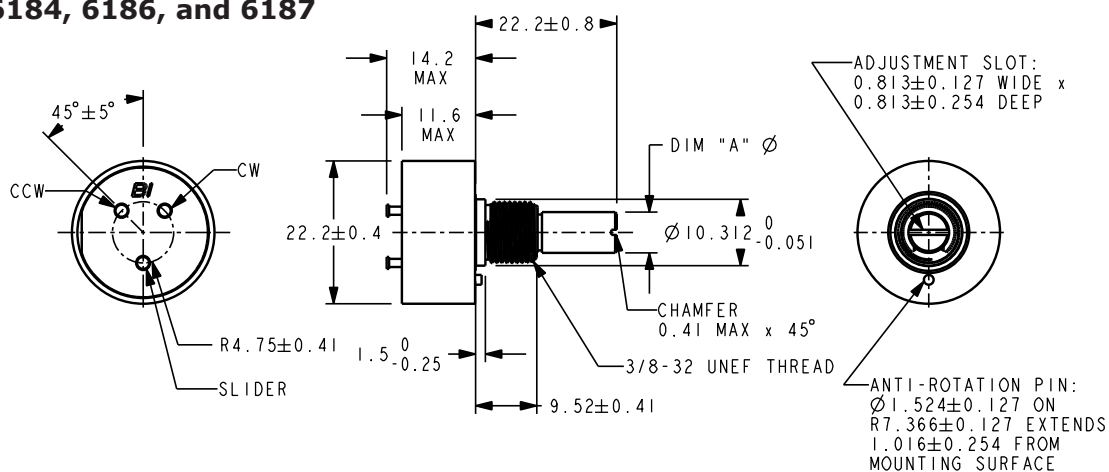

| DIM | MODEL 6184             | MODEL 6186                | MODEL 6187                |
|-----|------------------------|---------------------------|---------------------------|
| A   | 6.0 +0.0000<br>-0.0127 | 3.1699 +0.0000<br>-0.0127 | 6.3424 +0.0000<br>-0.0127 |

Dimensions in mm

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct    +86 (21) 6401-6692  
Email      amall@ameya360.com  
QQ        800077892  
Skype      ameyasales1 ameyasales2

➤ Customer Service :

Email      service@ameya360.com

➤ Partnership :

Tel        +86 (21) 64016692-8333  
Email      mkt@ameya360.com