

## Features

### Unregulated Converters

- High Efficiency up to 84%
- Low Deviation (10% ~ 100% Load)
- 1kVDC and 2kVDC Isolation Option
- Safety Certified
- -40°C to +100°C Operating Temperature Range
- 1W SIP4 Package

## ECONOLINE

DC/DC-Converter  
with 3 year Warranty

**RECOM**

### Description

The RO/E series is an unregulated DC/DC converter in standard SIP4 package style. This series has been designed to offer exceptionally high efficiency at low loads, an extended operating temperature range and low deviation (10% to 100% load). Uses include applications with restricted energy budget and industrial applications where a high efficiency level is required.

### Selection Guide

Part Number SMD	Isolation Voltage (kVDC)	Input Voltage (VDC)	Output Voltage (VDC)	Output Current (mA)	Efficiency (typ.)	Capacitive Load (max.) <sup>(1)</sup>
RO-3.305S/E*	1	3.3	5	200	83%	2200µF
RO-0505S/E*	1	5	5	200	84%	2200µF
RO-1205S/E*	1	12	5	200	84%	2200µF
RO-2405S/E*	1	24	5	200	81%	2200µF

\* add Suffix "/H" for 2kVDC Isolation Voltage - e.g. RO-3.305S/EH

\* add Suffix "/P" for Continuous Short Protection - e.g. RO-3.305S/EHP, RO-3.305S/EP

### Specifications (measured at $T_A = 25^\circ\text{C}$ , nominal input voltage, full load and after warm-up)

Input Voltage Range	$\pm 10\%$	
Output Voltage Accuracy	$\pm 5\%$ max.	
Line Voltage Regulation	low line to high line at full load	1.2% max.
Load Voltage Regulation	Load Deviation 10% to 100%	12% typ.
Output Ripple and Noise (20MHz BW)	50mVp-p typ., 100mVp-p max.	
Operating Frequency (Vin=nominal input)	20kHz min. / 90kHz max.	
Efficiency	see Selection Guide	
Minimum Load = 0%	Specifications valid for 10% minimum load only	
Isolation Voltage	(tested for 1 second)	1000 VDC
	(rated for 1 minute**)	500VAC / 60Hz
Isolation Voltage	H-Suffix	(tested for 1 second)
	H-Suffix	(rated for 1 minute**)
Isolation Capacitance		75pF max.
Isolation Resistance	(Viso=500V)	10GΩ min.
Short-Circuit Protection		1 second
Operating Temperature Range		-40°C to +100°C
Storage Temperature		-55°C to +125°C
Relative Humidity		95% RH
Package Weight		1.4g
MTBF (+25°C)	Detailed Information see Application Notes chapter "MTBF"	using MIL-HDBK 217F
MTBF (+100°C)		3459 x 10 <sup>3</sup> hours
		using MIL-HDBK 217F
		756 x 10 <sup>3</sup> hours

\*\*Any data referred to in this datasheet are of indicative nature and based on our practical experience only. For further details, please refer to our Application Notes.


## 1 Watt SIP4 Single Output



UL-60950-1 Certified

**RO/E**

## Derating-Graph (Ambient Temperature)

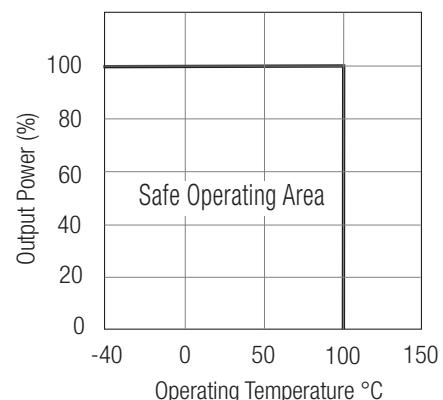

### Notes




Note 1: Maximum capacitive load is defined as the capacitive load that will allow start up in under 1 second without damage to the converter.

Refer to Application Notes

Typical Characteristics



## RO-xx05S/E

Tolerance Envelope

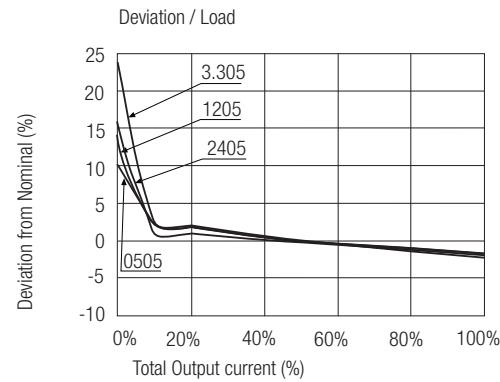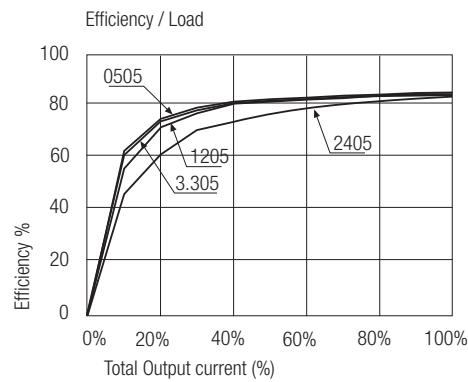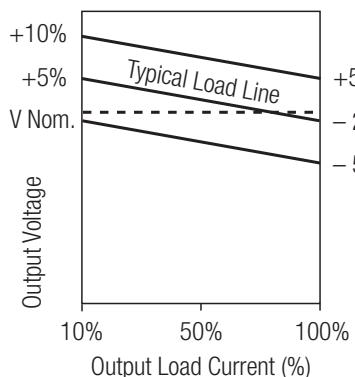


Package Style and Pinning

**RO/E**

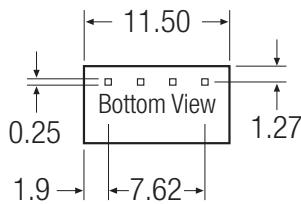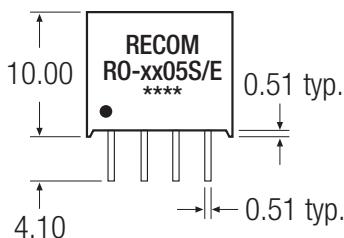

Recommended Footprint Details

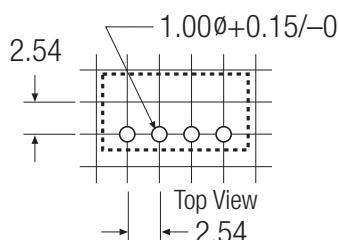

Pin Connections	Function
Pin #	4 Pins
1	-Vin
2	+Vin
3	-Vout
4	+Vout

Unit: mm  
Tolerance:  $\pm 0.25$  mm

The product information and specifications are subject to change without prior notice. RECOM products are not authorized for use in safety-critical applications (such as life support) without RECOM's explicit written consent. A safety-critical application is defined as an application where a failure of a RECOM product may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The buyer shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

# AMEYA360

## Components Supply Platform

### Authorized Distribution Brand :



### Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

### Contact Us :

#### ➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

#### ➤ Sales :

Direct +86 (21) 6401-6692  
Email amall@ameya360.com  
QQ 800077892  
Skype ameyasales1 ameyasales2

#### ➤ Customer Service :

Email service@ameya360.com

#### ➤ Partnership :

Tel +86 (21) 64016692-8333  
Email mkt@ameya360.com