




# Heyco® Feet of Strength

## Feet with Push Rivet

PART DIMENSIONS						PANEL DIMENSIONS						PART NO. Black	DESCRIPTION	
A Overall Height in.   mm.		B Top Diameter in.   mm.		C Bottom Diameter in.   mm.		Mounting Hole Diameter in.   mm.		Thickness Range Minimum   Maximum in.   mm.						
<b>FSR Series</b>														
<b>NEW!</b>	.16	4,0	.43	10,8	.39	10,0	.142	3,6	.02	0,5	.05	1,2	<b>2519</b>	FSR 16-14-05
									.05	1,2	.08	2,0	<b>2520</b>	FSR 16-14-08
									.06	1,5	.10	2,5	<b>2521</b>	FSR 16-14-10
<b>NEW!</b>									.10	2,5	.14	3,5	<b>2550</b>	FSR 16-14-14
	.17	4,2	.83	21,0	.79	20,0	.165	4,2	.03	0,8	.07	1,8	<b>2522</b>	FSR 17-17-07
<b>NEW!</b>									.07	1,8	.11	2,8	<b>2523</b>	FSR 17-17-11
<b>NEW!</b>									.11	2,9	.15	3,7	<b>2524</b>	FSR 17-17-15
									.15	3,8	.19	4,8	<b>2525</b>	FSR 17-17-19
	.22	5,5	.56	14,2	.53	13,5	.122	3,1	.03	0,8	.07	1,8	<b>2517</b>	FSR 22-12-07
<b>NEW!</b>									.07	1,8	.11	2,8	<b>2518</b>	FSR 22-12-11
<b>NEW!</b>							.165	4,2	.02	0,6	.04	1,0	<b>2500</b>	FSR 24-17-04
<b>NEW!</b>									.04	1,0	.08	2,0	<b>2501</b>	FSR 24-17-08
<b>NEW!</b>	.24	6,0	.59	15,0	.55	14,0			.08	2,0	.12	3,1	<b>2502</b>	FSR 24-17-12
<b>NEW!</b>							.204	5,2	.03	0,8	.05	1,2	<b>2506</b>	FSR 24-21-05
<b>NEW!</b>									.05	1,3	.09	2,3	<b>2507</b>	FSR 24-21-09
<b>NEW!</b>									.03	0,8	.07	1,8	<b>2526</b>	FSR 241-17-07
	.24	6,0	.83	21,0	.79	20,0	.165	4,2	.08	1,9	.11	2,8	<b>2527</b>	FSR 241-17-11
									.11	2,9	.16	4,0	<b>2528</b>	FSR 241-17-16
<b>NEW!</b>									.01	0,3	.03	0,8	<b>2575</b>	FSR 31-17-03
<b>NEW!</b>	.31	8,0	.83	21,0	.79	20,0	.165	4,2	.03	0,8	.08	2,0	<b>2529</b>	FSR 31-17-08
									.08	2,1	.12	3,1	<b>2530</b>	FSR 31-17-12
	.35	9,0	.59	15,0	.55	14,0	.165	4,2	.04	1,0	.08	2,0	<b>2532</b>	FSR 35-17-08
									.08	2,0	.12	3,1	<b>2533</b>	FSR 35-17-12

Standard color black.

- Require only fingertip pressure for fast, easy installation.
- May be released from inside the panel.
- Multiple sizes range in height from .217" (5,5 mm) to .354" (9,0 mm).
- Part Description Key:  
FSR XX-YY-ZZ where XX = Overall Height (inches), YY = Mounting Hole Diameter (inches) and ZZ = Maximum Panel Thickness (inches)

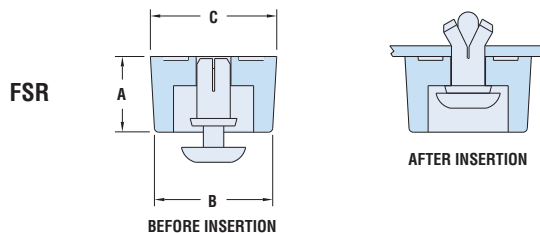

Material: Thermoplastic Rubber (TPR)  
 Flammability Rating: 94-HB  
 Temperature Range: -30°F (-34°C) to 250°F (121°C)

Quick Specs

# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)