### REVISION DN

DO NOT SCALE FROM THIS PRINT

TABLE 2					
BODY SPECIFICATION					
ROW/OPTION	USE BODY				
-S, -S-NA/-NE	TSW-50-S				
-S-RA/-RE	TSW-50-S-RA				
-D, -D-NA/-NE	RTSW-50-D				
-D-RA	TSW-50-D-RA				
-T, -T-NA/-NE	TSW-50-T				
-T-RA, -Q-RA	TSW-50-T-RA				
-Q	TSW-50-T				

## TSW-XXX-XX-XXX-X-XXX

OPTION #2

-BLANK= STRAIGHT

ÎN/A IN -T OR -QI

OPTION #1

-POLARIZING SPECIFICATION

-RA= RIGHT ANGLE (SEE TABLE 3 & 5, FIG 5)

-NA= RA OPTION WITH STRAIGHT OPTION BODY

-NE= RE OPTION WITH STRAIGHT OPTION BODY

·LA= -ra optioń with -ll option (see fig 5)

-S: SINGLE

-T: TRIPLE

-D: DOUBLE

(n/a in single row, 1 or 2 positions)

-LL= LOCKING LEAD (SEE FIG 4) (N/A WITH -RE OR -NÈ OPTION)

XXX INDICATES POS. TO BE OMITTED (SEE FIG 3)

-LC= LOCKING CLIP (USE LTC-01 FOR -S ROW AND LTC-02 FOR -D ROW) (STYLES 08 THRU 13 & 22 ONLY) (SEE FIG 2)

(N/A IN -RA OR -RE OPTION AND/OR LESS THAN 4 PÓSITIONS)

-RE= EXTENDED RIGHT ANGLE (SEE TABLE 3 & 5, FIG 5) (SINGLE ROW ONLY)

**ROW SPECIFICATION (SEE TABLE 2)** 

-Q: TRIPLE ROW, FILL OUTER ROWS ONLY

TERMINAL SPACE SPEC. (SEE ASSEMBLY INSTRUCTIONS) -1=.100[2.54] FILL EVERY POSITION -2= .200[5.08] FILL EVERY OTHER POS. STARTING W/ 1ST & ENDING W/ LAST POS. IN BODY)

BODY LENGTH SPEC. EXPRESSED IN # OF POS

-1: -01 THRU -50 (-S, -D, -T) "A" = NO. OF POS.  $\times$  .100[2.54]

-2: -02 THRU -25 (-S, -D, -T) "A" = NO OF POS.  $\times$  .200[5.08] - .100[2.54]

TERMINAL SPECIFICATION SEE TABLE 1

PLATING SPECIFICATION -

-G: 10µ" GOLD IN CONTACT AREA, 3µ" GOLD ON TAIL -T: MATTE TIN CONTACT AND TAIL

-S: 30µ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL

-H: 30µ" HEAVY GOLD IN CONTACT AREA, 3µ" GOLD ON TAIL -L: 10µ" LIGHT SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL

-F: 3µ" FLASH SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL

-E: 50µ" EXTRA HEAVY GOLD IN CONTACT AREA, 3µ" GOLD ON TAIL

-TL: TIN/LEAD (90/10 +/-5%) CONTACT AND TAIL (AVAILABLE ONLY ON LEAD STYLES -07, -08 & -09)

-STL: 30µ" SELECTIVE GOLD IN CONTACT AREA, TIN/LEAD (90/10 +/-5%) TAIL (AVAILABLE ONLY ON LEAD STYLES -07, -08, -10, -15, -16, -17, -21, -23 & -24

THROUGH HOLE ONLY)
-TM: MATTE TIN CONTACT AND TAIL

-SM: 30µ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL -LM: 10µ" LIGHT SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL -FM: 3µ" FLASH SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL

-SS: 30µ" STRIPE SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL (SEE NOTE 13)

NOTES:

1. (C) REPRESENTS CRITICAL DIMENSION.

2. MINIMUM TERMINAL PUSHOUT: 3 LBS.

3. MAXIMUM HEIGHT VARIATION: .005 [.13] (R.A. TAIL N/A).

4. ASSEMBLE GOLD PLATE END AS SHOWN.

5. STYLE -26: ROUND END TO APPEAR ON BOTTOM.

6. 'C'± .005[0.13] FOR STYLE -08, OPTION -LA & -RA ONLY.

7. TOW & SWAY SPEC. OF 2° APPLIES TO ALL POSITIONS, POST & TAIL, IN ALL DIRECTIONS

8. ALL DIMENSIONS TO BE ABOUT CL WITHIN ±.005 [.13]

9. MEASURE FROM THE BEND RADIUS OF THE TERMINALS.

10. TSW-50-D BODY CAN BE USED IF RTSW-50-D IS UNAVAILABLE

© 11. ORIENTATE PINS TO PREVENT BANDOLIER MARKS FROM SHOWING IN THE POST AREA. (SEE TABLE 7)

12. MAXIMUM CUT FLASH: .020 [.50]

13. -SS OPTION ONLY AVAILABLE IN STRAIGHT LEAD STYLES -07, -08 & -09, -RA STYLE -08 ONLY. CAN ONLY MATE WITH SSW, SSQ, SSM, ESW, ESQ AND BCS.

UNLESS OTHERWISE SPECIFIED. DIMENSIONS ARE IN INCHES. TOLERANCES ARE:

DECIMALS **ANGLES** .XX: ±.01 [.3] .XXX: ±.005 [.13] 2° .XXXX: ±.0020 [.051]

PROPRIETARY NOTE THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC

DO NOT SCALE DRAWING

BODIES: DUPONT PBT, UL 94 VO, COLOR: BLACK TERMINALS: PHOS BRONZE


520 PARK FAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com


.025[0.64] SQ. POST TERMINAL STRIP ASSEMBLY

TSW-XXX-XX-XXX-X-XXX BY: KOLB

E:\DWG\MISC\MKTG\TSW-XXX-XXX-XXX-XXX-MKT.SI DDRW

08/24/1988 | SHEET 1 OF 6

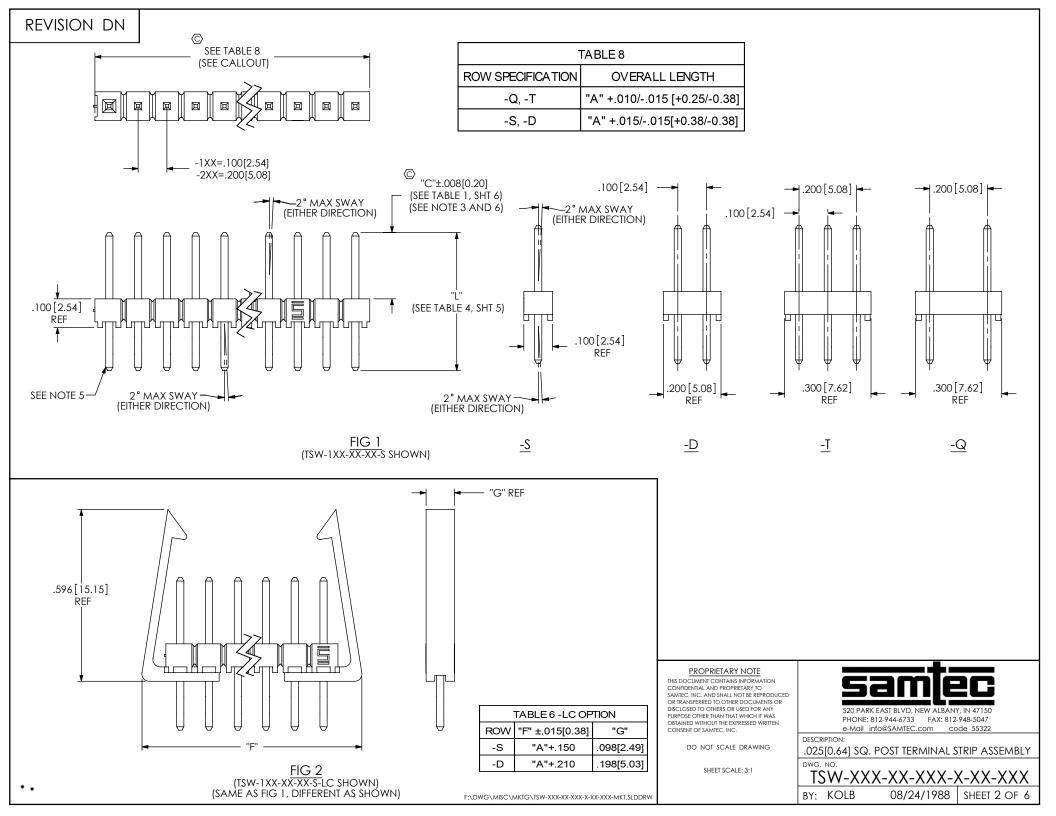

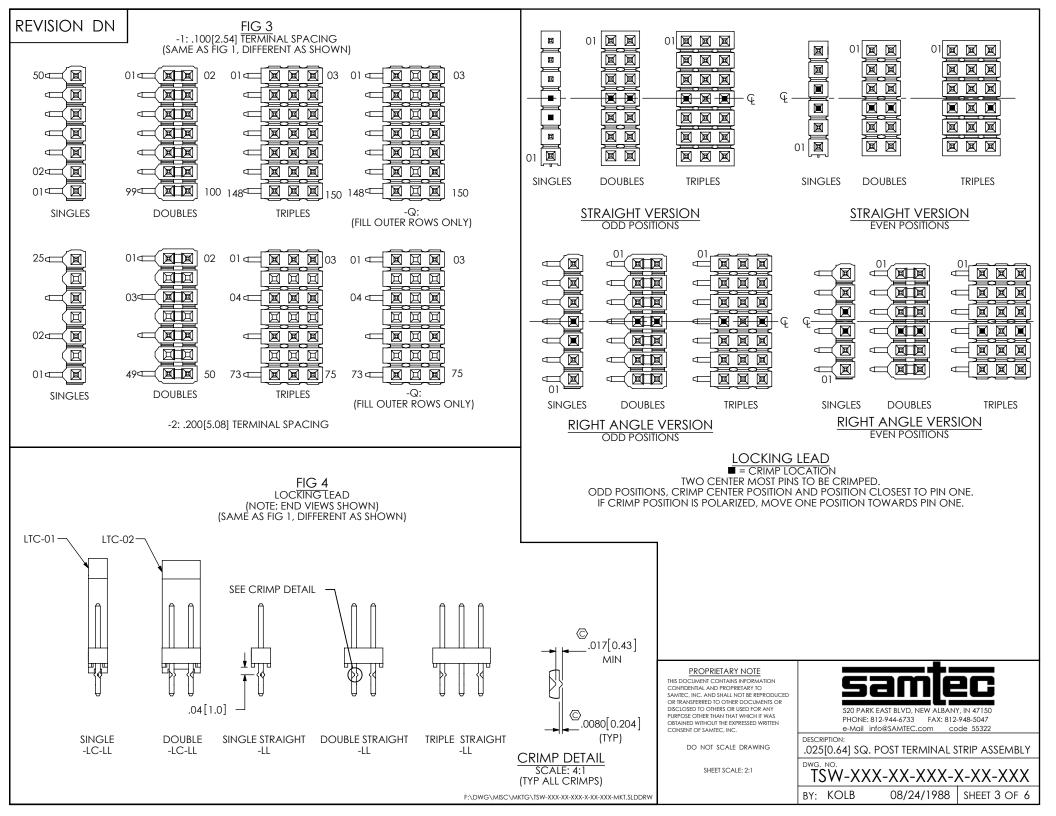

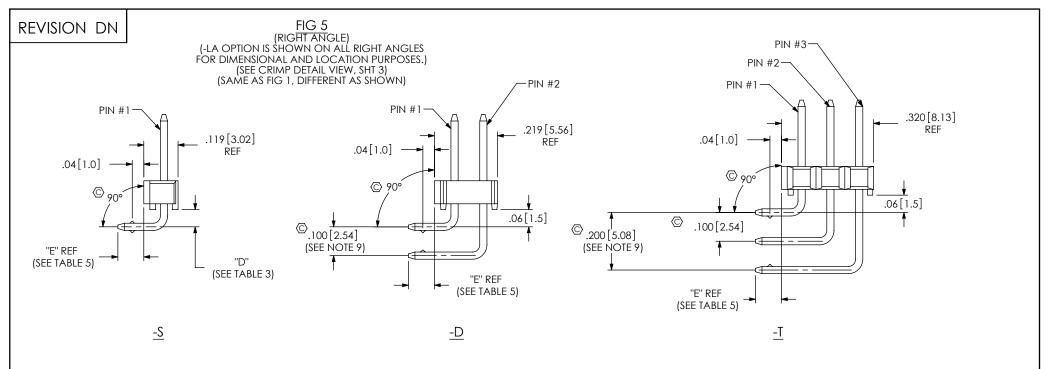


TABLE 3						
-XX	"D"					
-RA/-NA	.06[1.5]					
-RE/-NE	.16[4.1]					

TABLE 5 "E"								
LEAD STYLI	RA SINGLE	RE SINGLE	RA DOUBLE	RA TRIPLE	NA SINGLE	NE SINGLE	NA DOUBLE	NA TRIPLE
08	.090 [2.29]	N/A	.090 [2.29]	.090 [2.29]	.109 [2.77]	N/A	.109 [2.77]	.109 [2.77]
09	.290 [7.37]	.190 [4.83]	.290 [7.37]	.290 [7.37]	.309 [7.85]	.209 [5.31]	.309 [7.85]	.309 [7.85]
10	.390 [9.91]	.290 [7.37]	.390 [9.91]	.390 [9.91]	.409 [10.39]	.309 [7.85]	.409 [10.39]	.409 [10.39]
11	.490 [12.45]	.390 [9.91]	.490 [12.45]	.490 [12.45]	.509 [12.93]	.409 [10.39]	.509 [12.93]	.509 [12.93]
12	.590 [14.99]	.490 [12.45]	.590 [14.99]	.590 [14.99]	.609 [15.47]	.509 [12.93]	.609 [15.47]	.609 [15.47]
13	.790 [20.07]	.690 [17.53]	.790 [20.07]	N/A	.809 [20.55]	.709 [18.01]	.809 [20.55]	N/A
16	.200 [5.08]	.100 [2.54]	.200 [5.08]	.200 [5.08]	.219 [5.56]	.119 [3.02]	.219 [5.56]	.219 [5.56]
21	.990 [25.15]	.890 [22.61]	N/A	N/A	1.009 [25.63]	.909 [23.09]	N/A	N/A
22	.190 [4.83]	.090 [2.29]	.190 [4.83]	.190 [4.83]	.209 [5.31]	.109 [2.77]	.209 [5.31]	.209 [5.31]
25	.100 [2.54]	N/A	.100 [2.54]	.100 [2.54]	.119 [3.02]	N/A	.119 [3.02]	.119 [3.02]
27	.890 [22.61]	.790 [20.07]	N/A	N/A	.909 [23.09]	.809 [20.55]	N/A	N/A
28	.690 [17.53]	.590 [14.99]	.690 [17.53]	N/A	.709 [18.01]	.609 [15.47]	.709 [18.01]	N/A
29	.800 [20.32]	N/A	N/A	N/A	.819 [20.80]	N/A	N/A	N/A
30	.600 [15.24]	N/A	.600 [15.24]	N/A	.619 [15.72]	N/A	.619 [15.72]	N/A

#### PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 3:1



520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322

.025[0.64] SQ. POST TERMINAL STRIP ASSEMBLY


TSW-XXX-XX-XXX-X-XXX BY: KOLB 08/24/1988 | SHEET 4 OF 6

F:\DWG\MISC\MKTG\TSW-XXX-XX-XXX-XXX-MKT.SLDDRW

## REVISION DN

TABLE 7 ( T.D. A.T.N.O. DALLY)								
TABLE 7 (-T PLATING ONLY)								
	NUMBER OF BAND MARKS ALLOWED IN POST AREA				NUMBER OF BAND MARKS ALLOWED IN POST AREA			
LEAD STYLE	PIN #1	PIN #2	PIN #3	LEAD STYLE	PIN #1	PIN #2	PIN #3	
*-05	*0	N/A	N/A	*-17	2	N/A	N/A	
-06	1	N/A	N/A	*-18	2	N/A	N/A	
-07	1	N/A	N/A	*-19	2	N/A	N/A	
-08	0	0	0	*-20	2	N/A	N/A	
-08 RA	0	0	0	*-21	2	N/A	N/A	
-09	0	0	0	-21-RA	0	N/A	N/A	
-09 RA	0	0	0	-21-RE	0	N/A	N/A	
-09-RE	0	0	0	-22	0	0	0	
-10	0	0	0	-22-RA	0	0	0	
-10-RA	0	0	0	-22-RE	0	0	0	
-10-RE	0	0	0	-23	1	N/A	N/A	
-11	0	0	0	-24	1	N/A	N/A	
-11-RA	0	0	0	-25	1	1	1	
-11-RE	0	0	0	*-25-RA	1	0	0	
-12	0	0	0	*-26	1	N/A	N/A	
-12-RA	0	0	0	*-27	0	N/A	N/A	
-12-RE	0	0	0	*-27-RA	0	N/A	N/A	
-13	0	0	N/A	*-27-RE	0	N/A	N/A	
-13-RA	0	0	N/A	*-28	0	0	N/A	
-13-RE	0	0	N/A	*-28-RA	0	0	N/A	
-14	1	N/A	N/A	*-28-RE	0	0	N/A	
*-15	2	N/A	N/A	*-29	1	N/A	N/A	
*-16	1	1	1	*-29-RA	1	N/A	N/A	
*-16-RA	1	1	1	*-30	1	1	N/A	
*-16-RE	1	1	1	*-30-RA	1	1	N/A	

INS TO BE FLIPPED OPPOSITE OF SELECTIVE PLATING BEFORE BEING INSERT



IN PROCESS 1 (SAME AS FIG. 1, DIFFERENT AS SHOWN) -T PLATING ONLY (SEE NOTE 11) (SEE TABLE 7)

TABLE 4						
PIN STYLE	"L" REF					
T-1S6-07-XXX-2	0.430 [10.92]					
T-1S6-08-XXX-2	0.530 [13.46]					
T-1S6-09-XXX-2	0.730 [18.54]					
T-1S6-10-XXX-2	0.830 [21.08]					
T-1S6-11-XXX-2	0.930 [23.62]					
T-1S6-12-XXX-2	1.030 [26.16]					
T-1S6-13-XXX-2	1.230 [31.24]					
T-1S6-14-XXX-2	1.430 [36.32]					
T-1S6-15-XXX-2	0.630 [16.00]					
T-1S6-16-XXX-2	0.445 [11.30]					
T-1S6-17-XXX-2	0.480 [12.19]					
T-1S6-18-XXX-2	0.300 [7.62]					
T-1S6-19-XXX-2	1.330 [33.78]					
T-1S6-20-XXX-2	1.130 [28.70]					
T-1S6-21-XXX-2	0.335 [8.51]					
T-1RS7-01-XXX-2	0.456 [11.58]					

#### PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 3:1



520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322

DESCRIPTION:

.025[0.64] SQ. POST TERMINAL STRIP ASSEMBLY

WG. NO.

TSW-XXX-XX-XXX-X-XXXX BY: KOLB 08/24/1988 SHEET 5 OF 6

TABLE 1									
TERMINAL SPECIFICATIONS									
TERMINAL SPEC	PIN #1	PIN #2	PIN #3	"C"					
-05 (3)	T-1S6-21-XXX-2	N/A	N/A	0.105 [2.67]	(5)				
-06 (3)	T-1S6-18-XXX-2	N/A	N/A	0.105 [2.67]	(5)				
-07 (3)	T-1S6-07-XXX-2	N/A	N/A	0.230 [5.84]	(5)				
-08 (4)	T-1S6-08-XXX-2	T-1S6-09-XXX-2	T-1S6-11-XXX-2	(7)0.230 [5.84]	(5)(6)				
-09	T-1S6-09-XXX-2	T-1S6-11-XXX-2	T-1S6-20-XXX-2	0.230 [5.84]	(6)				
-10	T-1S6-10-XXX-2	T-1S6-12-XXX-2	T-1S6-13-XXX-2	0.230 [5.84]					
-11	T-1S6-11-XXX-2	T-1S6-20-XXX-2	T-1S6-19-XXX-2	0.230 [5.84]					
-12	T-1S6-12-XXX-2	T-1S6-13-XXX-2	T-1S6-14-XXX-2	0.230 [5.84]					
-13	T-1S6-13-XXX-2	T-1S6-14-XXX-2	N/A	0.230 [5.84]					
-14(3)	T-1S6-08-XXX-2	N/A	N/A	0.320 [8.13]	(5)				
-15 (3)	T-1S6-09-XXX-2	N/A	N/A	0.520 [13.21]	(5)				
-16	T-1S6-09-XXX-2	T-1S6-11-XXX-2	T-1S6-20-XXX-2	0.320 [8.13]	(5)(6)				
-17 (3)	T-1S6-10-XXX-2	N/A	N/A	0.620 [15.75]	(5)				
-18 (3)	T-1S6-11-XXX-2	N/A	N/A	0.720 [18.29]	(5)				
-19 (3)	T-1S6-12-XXX-2	N/A	N/A	0.820 [20.83]	(5)				
-20 (3)	T-1S6-13-XXX-2	N/A	N/A	1.020 [25.91]	(5)				
-21 (8)	T-1S6-14-XXX-2	N/A	N/A	1.220 [30.99]	(5)				
-21 (1)	T-1S6-14-XXX-2	N/A	N/A	0.230 [5.84]	(5)				
-22	T-1S6-15-XXX-2	T-1S6-10-XXX-2	T-1S6-12-XXX-2	0.230 [5.84]	(5)(6)				
-23 (3)	T-1S6-16-XXX-2	N/A	N/A	0.230 [5.84]	(5)				
-24 (3)	T-1S6-17-XXX-2	N/A	N/A	0.265 [6.73]	(5)				
-25 (4)	T-1S6-15-XXX-2	T-1S6-10-XXX-2	T-1S6-12-XXX-2	0.320 [8.13]	(5)(6)				
*-26 (3)	T-1RS7-01-XXX-2	N/A	N/A	0.230 [5.84]					
-27	T-1S6-19-XXX-2	N/A	N/A	0.230 [5.84]					
-28	T-1S6-20-XXX-2	T-1S6-19-XXX-2	N/A	0.230 [5.84]					
-29(4)	T-1S6-19-XXX-2	N/A	N/A	0.320 [8.13]					
-30 (4)	T-1S6-20-XXX-2	T-1S6-19-XXX-2	N/A	0.320 [8.13]					




FIG 6 (-26 LEAD STYLE) (SAME AS FIG. 1, DIFFERENT AS SHOWN)

(1) .230[5.84] POST FOR -RA OR -RE OPTION (2) OMIT WITH -Q ROW SPECIFICATION

(5) AVAILABLE IN -LL OPTION

(1) .230[3.84] POST FOR FRA OR FRE OPTION
(2) OMIT WITH -Q ROW SPECIFICATION
(3) NOT AVAILABLE IN -RA OR -RE OPTION
(4) NOT AVAILABLE IN -RE OPTION
(5) AVAILABLE IN -LA OPTION
(6) AVAILABLE IN -LA OPTION
(7) ON STYLE -08 -LA, RA: "C" = .230[5.84]±008[0.20]
(8) 1.220[30.99] POST FOR STRAIGHT PIN VERSION
\* SQUARE END OF PIN (T-1RS7-01-XXX-2 SHOULD BE LOCATED AT "C" DIMENSION DURING FILL PROCESS. (SEE FIG. 6)

#### PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 3:1



520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322

DESCRIPTION:

.025[0.64] SQ. POST TERMINAL STRIP ASSEMBLY

08/24/1988 | SHEET 6 OF 6 BY: KOLB

# AMEYA360 Components Supply Platform

# Authorized Distribution Brand:

























# Website:

Welcome to visit www.ameya360.com

## Contact Us:

# Address:

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd Minhang District, Shanghai , China

## ➤ Sales:

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

## Customer Service :

Email service@ameya360.com

# Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com