


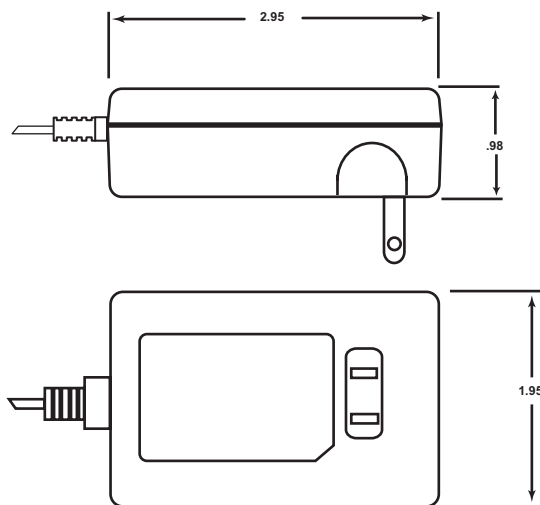

Features:

N.A. AC input
Fully enclosed plastic case
Fully regulated output
High Efficiency
Warranty: 5 years

Environmental

Operating temperature....0° C to 40° C
Storage temperature.....-55° C to 85° C
Weight: 0.5 lbs

EMI

Meets FCC class B

Safety

UL 1950
cUL Listed to CSA 22.2 No. 950

Electrical specifications

Input

Voltage.....90-132VAC
Current.....0.75A
Frequency.....47-63 Hz
Input connector.....2 Pin NEMA 5/15 plug

Output

Line regulation.....TYP 1%
Load regulation.....5% Max
Set point..... 5% of rated output
Hold up time.....12 ms min. at full load 115 V

Over voltage protection.....Built-in
Over current protection.....Built-in
Short circuit protection.....Pulsing Mode, auto recovery
Ripple/noise(Vp-p).....1%
Output connector.....barrel type(5.5 x 2.5 x 9.5mm)

Polarity: COM  +V

Output Electrical Specifications

Model No.	Voltage	Power	Current
WP1205-760	5	12	2.4A
WP1215-760	15	12	0.8A
WP1212-760	12	12	1A
WP1224-760	24	12	0.5A



AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com