

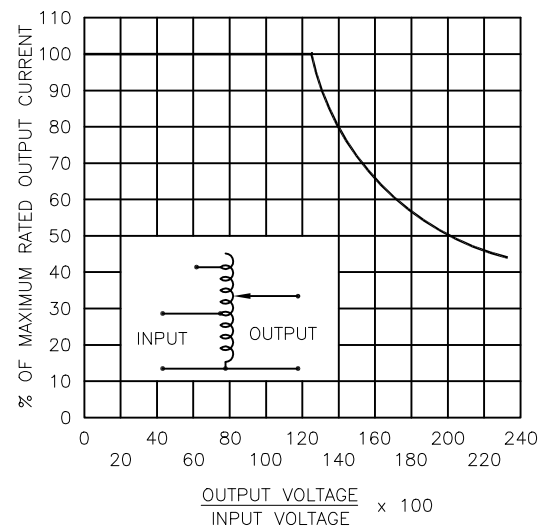
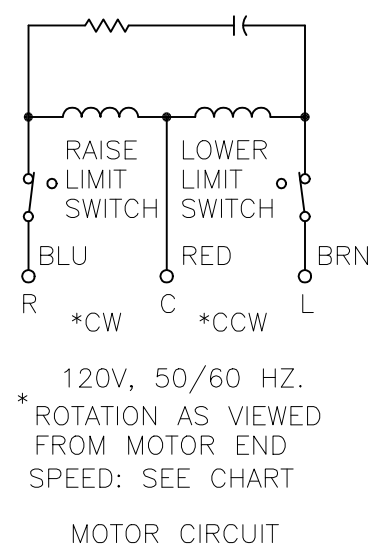
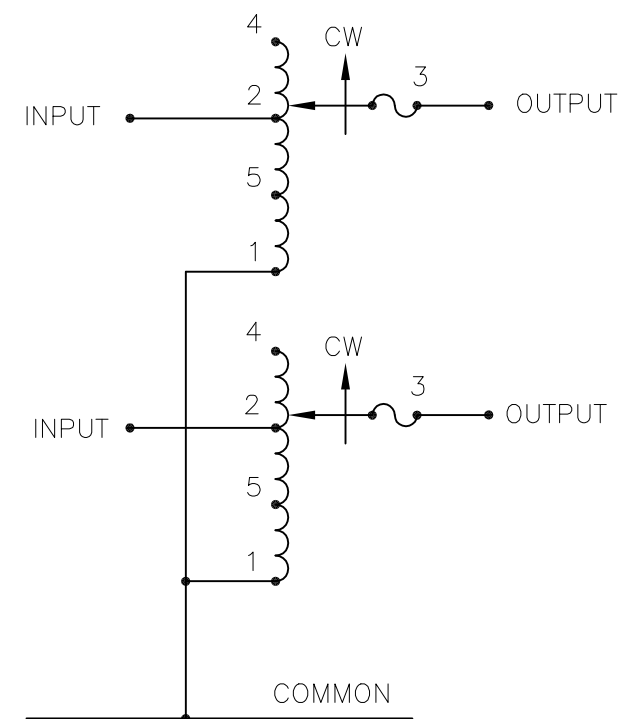
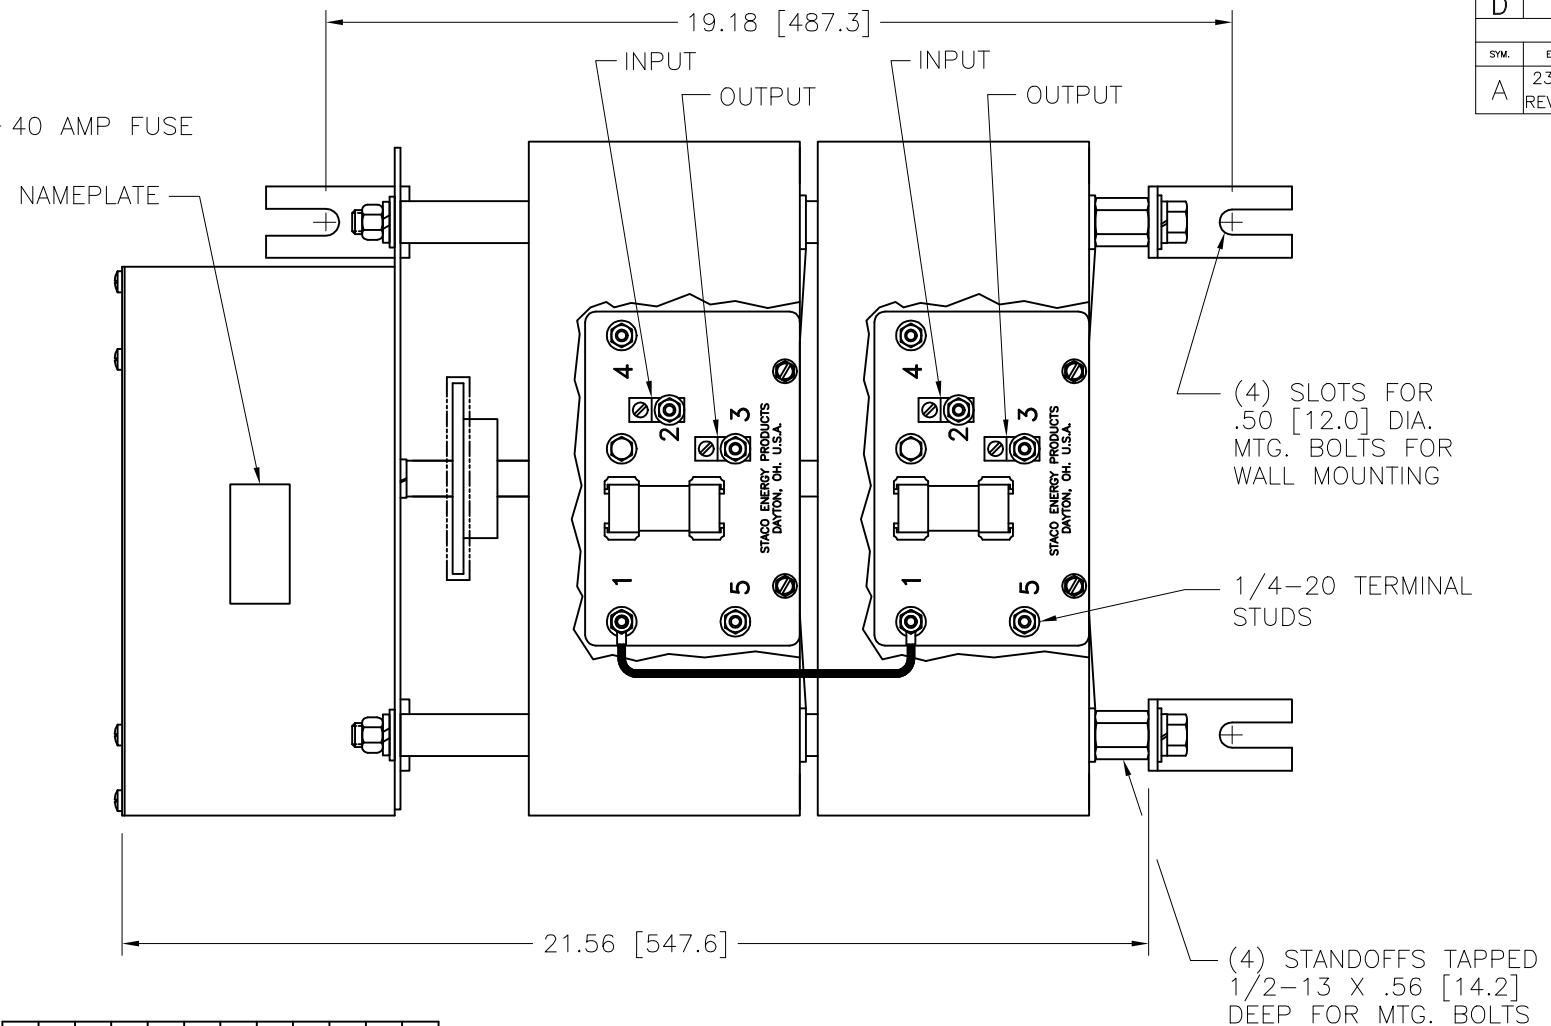
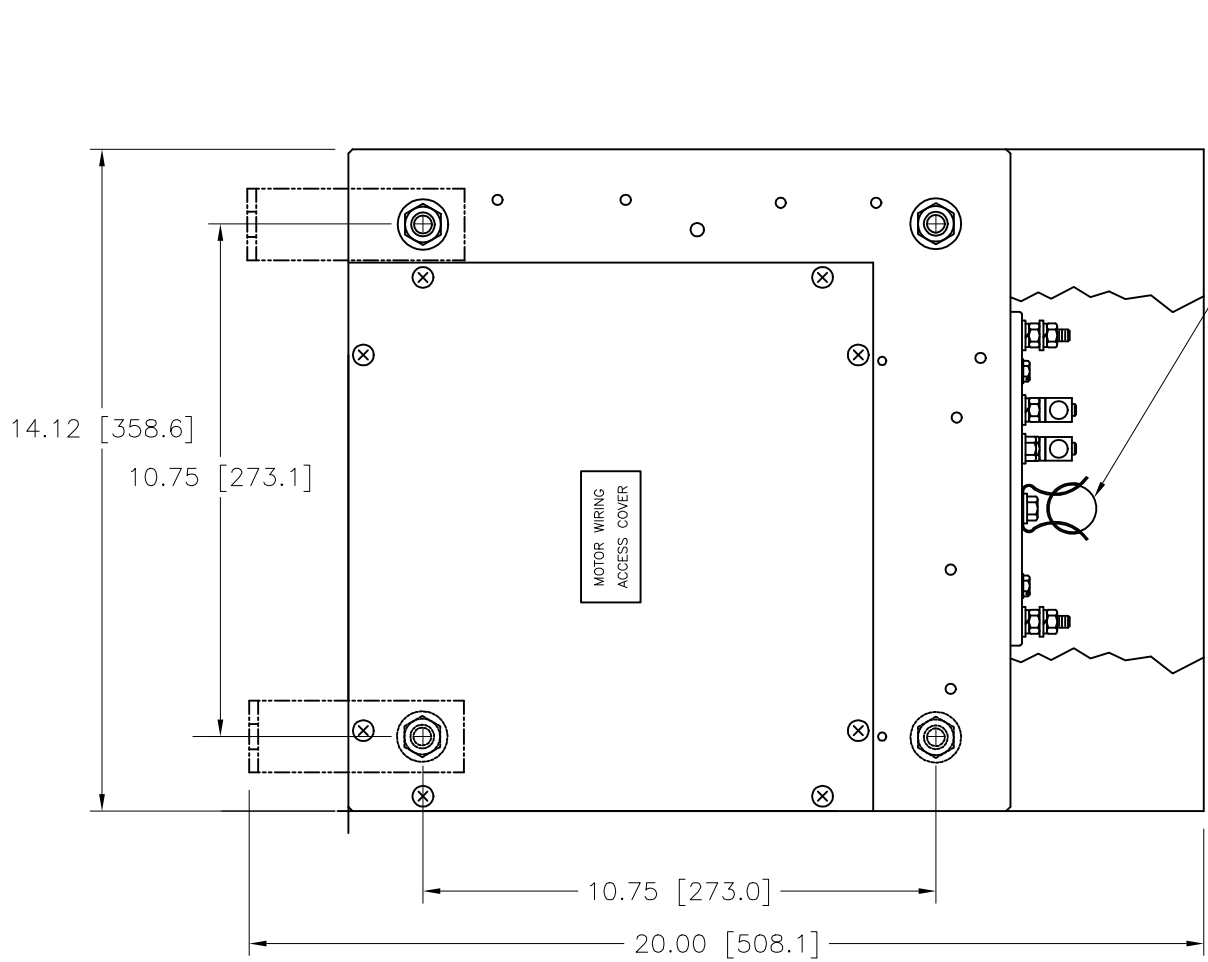


FIGURE A
MAXIMUM OUTPUT CURRENT OF ANY DUAL INPUT VOLTAGE OR VOLTAGE DOUBLER UNIT OPERATED AT LOWER INPUT VOLTAGE.

MAXIMUM OUTPUT CURRENT IN OUTPUT VOLTAGE RANGE FROM 0 TO 25 PERCENT ABOVE LINE VOLTAGE. AT HIGHER OUTPUT VOLTAGES, OUTPUT CURRENT MUST BE REDUCED ACCORDING TO RATING CURVE (SEE FIGURE A).

++ MAXIMUM KVA AT MAXIMUM OUTPUT AND CORRESPONDING DE-RATED CURRENT. MAXIMUM KVA AT LOWER OUTPUT VOLTAGES MAY BE CALCULATED FROM RATING CURVE, (SEE FIGURE A).

V.D. = VOLTAGE DOUBLER.

SPEED (SECONDS)	TYPE NO.
5	5M6020CT-2S
15	15M6020CT-2S
30	30M6020CT-2S
60	60M6020CT-2S

SPECIFICATIONS									
WIRING	INPUT		OUTPUT			SHAFT ROTATION FOR INCREASE VOLTAGE	TERMINAL CONNECTIONS		
	VOLTS	HERTZ	VOLTS	MAX. AMPS	MAX. KVA		FOR INCREASING VOLTAGE AS VIEWED FROM ROTOR END		
							INPUT	JUMPER	OUTPUT
SINGLE PHASE SERIES	480	50/60	0-480	35	16.8	CW	4-4	---	3-3
			0-560	35	19.6	CW	2-2	---	3-3
	240	50/60	0-560	35*-15 V.D.	8.4 +	CW	5-5	---	3-3
UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ± DECIMALS .XX .001± .12 .002 Holes .002 ANGLES 1° DRAFT 1-1/2°			UNITS IN [mm]			TITLE: SPEC. CONTROL DWG. VARIABLE TRANSFORMER TYPE: M6020CT-2S			
MATERIAL:			ALL DIMENSIONS APPLY AFTER PLATING			STACO ENERGY PRODUCTS CO. DAYTON, OHIO U.S.A.			
DRAWN BY		DATE	FIRST USED ON		DO NOT SCALE DWG.	CUSTOMER APPROVAL		DATE	
CHECKER		DATE	WEIGHT APPROX.		CODE IDENT. NO. 83008	DWG. NO.		DATE	
ENGINEER		DATE	SCALE		.5=1	SHEET 1 OF 1		DWG. NO. 032-7669	

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com