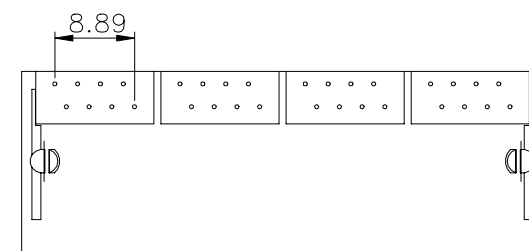
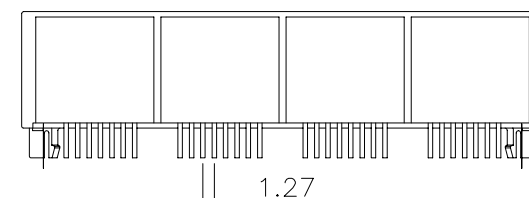
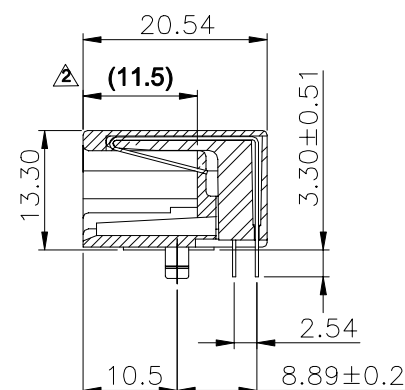
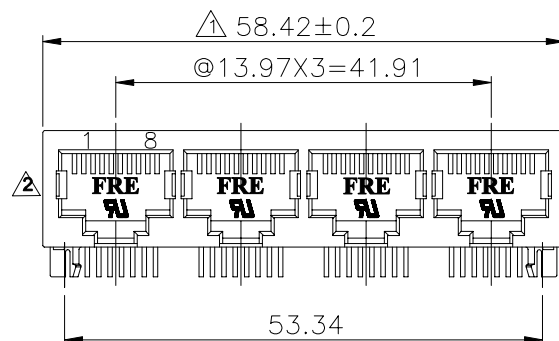


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
1		DRAWING MODIFY	JAMY 4/18/06	
2		DRAWING MODIFY	Yuan 08/01/06	

**NOTES:****ELECTRICAL:**

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 35 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : NYLON+G.F.30% UL94V-0.COLOR YELLOW
2. CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46$ mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:


1. STORAGE : -40°C TO +85°C.
2. OPERATION: -40°C TO +85°C.
3. WAVE SOLDERING TEMPERATURE: 255°C TO 265°C (5~10 SECONDS).

4. RoHS COMPLIANT

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

ROHS PART NUMBER: E5908-00CL8X-L

2-6u" 5-50u"
3-15u" 4-30u"

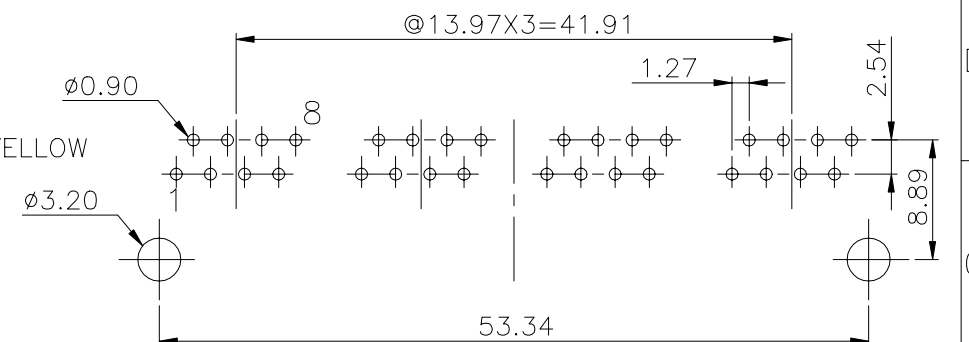

PC Board Layout Component Side Shown

Pulse A TECHNICAL COMPANY		RoHS Compliant	
TOLERANCES EXCEPT AS NOTED		FULL RISE ELECTRONIC CO., LTD	
MM .0 ± 0.2 .00 ± 0.15 .000 ± 0.075		TITLE 20.57 PCB JACK 8P	
ANGLES ± 0.5		DRAWING NO. GE593266-LA	
THIRD ANGLE PROJECTION		/PART NO. SEE NOTE	
DETACHED LISTS		SIZE A3	
DFTO JAMY		REV 2	
CHKD ANKUE		DO NOT SCALE DRAWING	
MFO		SHEET X OF Y	
APPV LUSHENG			
DATE 2006/8/3			
MATERIAL :			
QT'Y :			
FINISH :			
SCALE : 1.5:1			

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com