

SERIES 30


Sealed, Front Panel Mounting

FEATURES


- Threaded bushing
- Choice of 6 button colors
- SPST (momentary contact)
- Gold plated contacts
- Strong, lightweight aluminum housing
- Sealed against dust and moisture to IP67 (to IP67 with silicone boot*)



DIMENSIONS in inches (and millimeters)

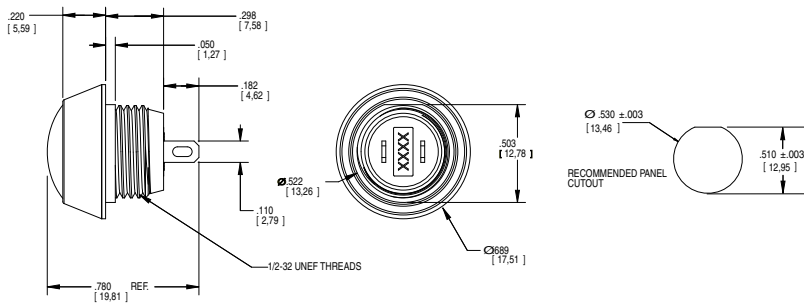

Cable Options

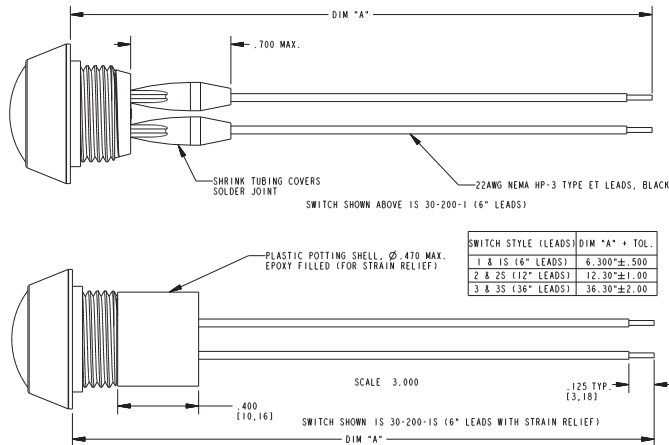

ORDERING INFORMATION

30-201B-1S	Series
	Threaded Bushing
	Strain Relief: Blank = shrink tubing, S = strain relief
	Connection: Blank = terminals, E = epoxy rear seal
	1 = 6" leads, 2 = 12" leads, 3 = 36" leads
	Silicone Boot: Blank = no boot, B = black boot, C = clear boot
	Cap Color: 0 = black, 1 = red, 2 = green
	3 = yellow, 4 = orange, 5 = blue

RATING

Cycles: 500,000 actuations

Operating Temperature: -40°C to +80°C

Shock: 100 G's/6 milliseconds

Travel: .090 nominal

Travel Before Make: .035 nominal

Rating at 24 VDC: 150 milliamps

Voltage Breakdown: 1000 Vac

Contact Resistance: 25 Megaohms max (initial)

Insulation Resistance: 1,000 Megaohms minimum

MATERIAL

Housing: Aluminum, black chrome finish

Button, Base, and Plunger: Nylon, 45% glass-filled

Terminal: Brass, gold-plated over nickel

Shorting Bar: Brass, gold-plated over nickel

Internal Seal: Silicone rubber

O-ring panel Seal: Silicone

Spring: Tinned music wire

Hex Nut: 1/2-32, Brass with Nickel Plating, P/N 635201

Lockwasher: Internal, 1/2 dia. , Steel with Zinc plating, P/N 635401

* Switch meets IP67 without boot if not actuated during immersion

CIRCUITRY: SPST N.O.



AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com