
# **LeCroy**

# **ZD Series Active Differential Probes**

1.5 GHz, 1 GHz, and 500 MHz

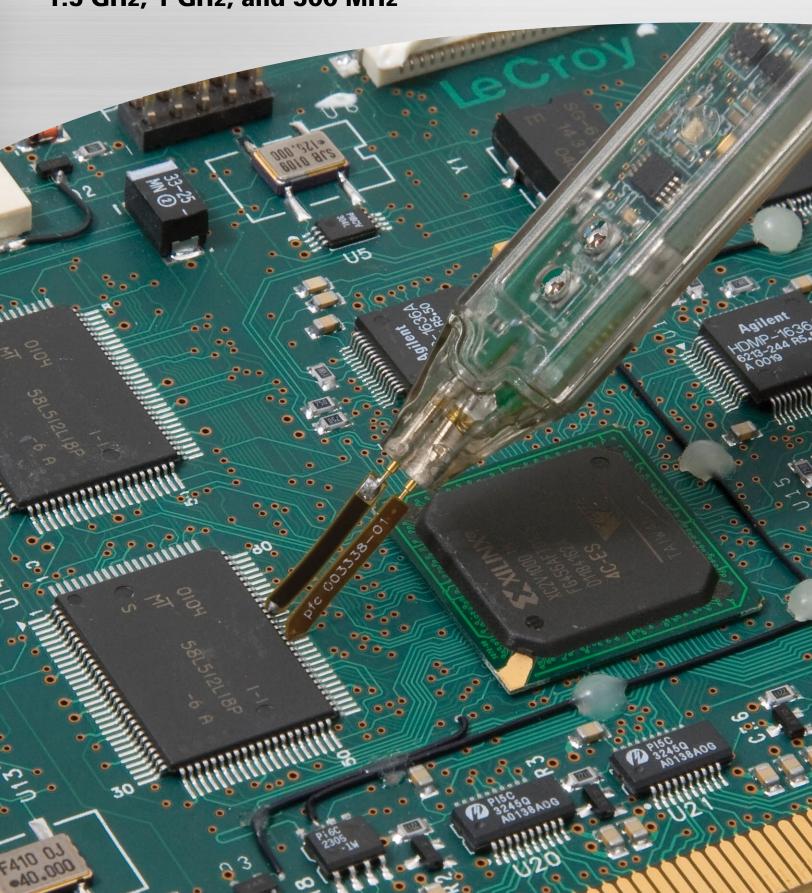

### **ZD SERIES ACTIVE DIFFERENTIAL PROBES**

The ZD Series probes provide wide dynamic range, excellent noise and loading performance and an extensive set of probe tips, leads, and ground accessories to handle a wide range of probing scenarios. The low 1 pF capacitance means this probe is ideal for all frequencies. The ZD Series differential probes provide full system bandwidth for all LeCroy Oscilloscopes 1.5 GHz and lower.

#### **Fully Integrated**

With the ProBus interface, the ZD500, 1000, and 1500 becomes an integral part of the oscilloscope. All probe gain and offset controls are transparent to the user, making it easier to probe the circuit without concern for which gain setting to choose. When used with a LeCroy digital oscilloscope, no external power supply is required.

#### Wide Dynamic Range

The ZD500, 1000, 1500 probes provides transparent probe attenuation so signals are always optimized for the display. The differential range is  $18 \ V_{p-p}$  with a differential offset of  $\pm 8$  and common mode range of  $\pm 10 \ V$ , making this versatile for every probing application.

#### **Wide Applications**

The wide dynamic range of  $16 \text{ V}_{\text{p-p}}$  and offset range of  $\pm 8$  suit this probe to a wide range of applications and signal types. The ZD differential probes are ideally suited for Automotive, Serial Data, power, and general purpose use.



The differential input capacitance is only 1 pF to minimize loading distortion on the highest frequency signals under test. System noise of only 4 mV<sub>rms</sub> allows accurate measurement of the smallest signals.

# A Variety of Probe Tips for Varied Tasks

Engineers often need to probe a variety of different test points in confined spaces. The extensive range of standard tip accessories for the ZD Series of probes ensures that this probe can meet any difficult probing challenge.


#### Innovative Probe Leads and Tips Provide Excellent Signal Performance Without Degradation

Probing with long leads or accessories is sometimes necessary to reach the test points, but it comes at the expense of reduced bandwidth, increased capacitance, and added noise. The ZD accessories are engineered to provide the best signal fidelity without ringing or distortions commonly introduced with tip accessories.

# **ZD SERIES ACTIVE DIFFERENTIAL PROBES**



The Swivel Tip adapter can be adjusted to probe test points ranging from 0 to .300" apart with Z-Axis compliance.

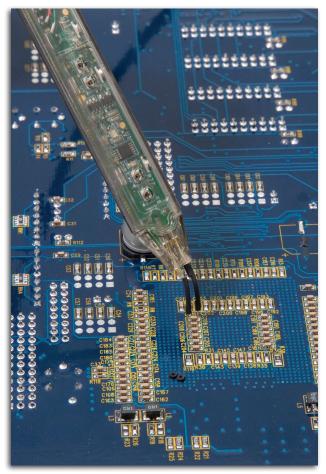

The short spring loaded ground leads can be used as either a ground accessory or an extension of the probe inputs.



The IC leads with a compensation resistor provide excellent signal fidelity when probing pins of an IC. One side of each blade is insulated to prevent shorting the signal to the adjacent pin.

# SPECIFICATIONS AND ORDERING INFORMATION

Specifications	ZD1500	ZD1000	ZD500
<b>Electrical Characteristics</b>			
Bandwidth (Warranted)	1500 MHz	1000 MHz	500 MHz
Bandwidth (Typical)	1700 MHz	1200 MHz	650 MHz
Risetime 10–90% (Typical)	270 ps	375 ps	650 ps
Risetime 20–80% (Typical)	200 ps	280 ps	500 ps
LF Attenuation Accuracy (Warranted)		2%	
Zero Offset (Typical) (within 15 minutes after autozero)		5 mV	
System Noise (Typical)	1.75 mV <sub>rms</sub>	1.75 mV <sub>rms</sub>	1.3 mV <sub>rms</sub>
Probe Noise Density (Typical)		38 nV/rt (Hz)	
Input Differential Range (Nominal)		±8 V (16 V <sub>p-p</sub> )	
Differential Offset Range (Nominal)		±18 V	
Offset Gain Accuracy (Typical)		2%	
Common Mode Range (Nominal)		±10 V	
Maximum Non-destruct Voltage (Nominal)		30 V	
CMRR (Typical)	60 dB 50/60 Hz 30 dB 20 MHz 25 dB @ 1500 MHz	60 dB 50/60 Hz 30 dB 20 MHz 25 dB @ 1000 MHz	60 dB 50/60 Hz 30 dB 20 MHz 25 dB 500 MHz
DC Input Resistance (Nominal)		50 k $\Omega$ (Common Mode) 120 k $\Omega$ (Differential Mode)	
Differential Input Capacitance (Typical)		< 1.0 pF	

#### Ordering Information

Micro Pogo Pin Tip, Qty 6

Right Angle Connector Short, Qty 2

Ordering information			
Product Description	<b>Product Code</b>	Product Description	Product Code
500 MHz, 1.0 pF, 1 M $\Omega$ Active Differential Probe	ZD500	Right Angle Connector Long, Qty 2	PACC-LD004
1 GHz, 1.0 pF, 1 M $\Omega$ Active Differential Probe	ZD1000	Micrograbber, Qty 2	PK006-4
1.5 GHz, 1.0 pF, 1 M $\Omega$ Active Differential Probe	ZD1500	Minigrabber, Oty 2	PACC-CL001
0. 1 14		Short Spring Loaded Bendable Ground, Qty 2	PACC-CD008
Standard Accessories		Probe Calibration Fixture, Qty 1	PCF200
Y Lead Adapter, Qty 1	PACC-ZD001	ZD Replacement Kit	PK111
Solder-In Lead, Qty 2	PACC-ZD002	Hands Free Probe Holder, Qty1	PACC-MS001
Long Spring Loaded Bendable Ground, Qty 2	PACC-ZD003	Harlas Free Frebe Holder, City F	1 ACC 1010001
Tip Saver, Qty 2	PACC-ZD004	Customer Service	
Swivel Tip Adapter	PACC-ZD005	LeCroy oscilloscopes and probes are designed, built, and tested to ensure high reliability. In the unlikely event you experience difficulties, our digital oscilloscopes	
Small IC Adapter, Qty 2	PACC-ZD006		
Micro Pogo Pin Tip. Qtv 6	PACC-ZD009		

PACC-ZD009

PACC-LD003



1-800-5-LeCroy www.lecroy.com Local sales offices are located throughout the world. Visit our website to find the most convenient location.

This warranty includes: • No charge for return shipping • Long-term 7-year support

• Upgrade to latest software at no charge

# AMEYA360 Components Supply Platform

#### **Authorized Distribution Brand:**

























#### Website:

Welcome to visit www.ameya360.com

#### Contact Us:

#### > Address:

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd Minhang District, Shanghai , China

#### > Sales:

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

#### Customer Service :

Email service@ameya360.com

## Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com