

TLD1040-24

Description:

The TLD1040-24 is a compact and lightweight Constant Voltage Switch Mode Power Supply. Waterproof design within a 2x4 J box, IP66, NEMA 4 suitable for dry and damp locations. Convection cooled plastic housing. Designed for outdoor and indoor applications. Some typical applications include LED's, Lighting, etc.

Specifications (@25C)

Electrical Specifications:

| | |
|------------------------|---|
| Input Voltage: | 100-304Vac ¹ |
| Input Frequency Range: | 47-63Hz |
| Max Input Current: | 0.5A @ 115Vac; 0.25A @ 230Vac |
| Max Inrush Current: | <5A @ 115Vac, 10A @ 220Vac |
| Power Factor: | >0.9 at full load, 115Vac |
| Output: | 24Vdc±5%, 1.67Adc Max |
| Crest Factor (Ipk): | 1.5 Max. |
| Leakage Current: | 300µA Typical |
| Efficiency: | 84% Typical at full load |
| Current Accuracy: | ±1% (when applicable) |
| Load Regulation: | ±3% |
| Hold up time: | Half cycle minimum at 120 VAC and 80% of rated voltage |
| Protection: | Over-voltage, Over current and Short circuit protection: Auto-recovery |

Environmental Specifications:

| | |
|------------------------|---|
| Operating Temperature: | -30 to 60°C (De-rating: 1%/°C from 60-70°C) |
| Storage Temperature: | -40 to 85°C |
| Operating Humidity: | 5 to 95% RH (non-Condensing) |
| Cooling: | Convection cooling |
| Vibration: | 5 to 50Hz |
| MTBF: | >100,000 Hours at full load and 25°C ambient conditions |
| EMC: | Compliant to 47CFR, Part 2, Part 15 and CispR PUB, 22 Class B |

General Specifications:

| | |
|---------------------|---|
| Connections: | 5in leads - Input: 18 AWG; Output: 18 AWG |
| Dimensions (WxLxH): | 70.0x95.0x32.0mm |
| Weight: | 220g |
| Warranty: | 3 years @ 40°C, 100% Load |


Safety Standards:

| | |
|------------|---------------------------|
| Standards: | UL (cUL) 1310, UL48 CE |
|------------|---------------------------|



RoHS Compliance: This power supply meets the requirements 2002/95/EC, know as the RoHS initiative.

Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

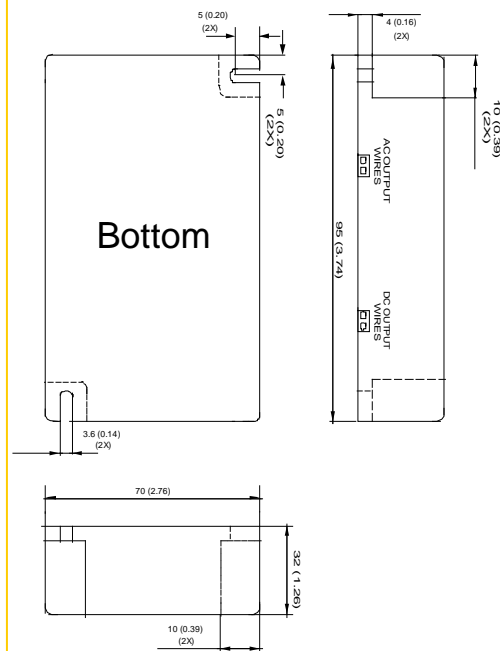

¹ Parts manufactured before November, 2010 have an input voltage range of 90 – 264VAC.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com