

Nickel Thin Film Temperature Sensor

Nickel thin film elements are characterized by a relatively high temperature coefficient. Typical applications include bearing temperature monitoring, HVAC temperature monitoring, and stator winding temperature monitoring

Nominal Resistance R_0	Accuracy	Part Number
100	DIN 43760	100 064-3

Specification	DIN 43760
Temperature Range	-60 °C to +250 °C
Temperature Coefficient	6180 ppm/K
Lead wire material	nickel
Protective coating	high-temperature epoxy
Self-heating	0,3K/mW in air
Response time	Water ($v = 0,2\text{m/sec.}$) $t_{0,9} = 0,3 \text{ sec.}$ Air ($v = 1\text{m/sec.}$) $t_{0,9} = 9 \text{ sec.}$
Operating Current, Maximum	5 mA


Polynomial of a nickel resistor in accordance with DIN 43760:

$$R(\vartheta) = R_0 \times (1 + 5,481 \times 10^{-3} \times \vartheta + 6,650 \times 10^{-6} \times \vartheta^2 + 2,805 \times 10^{-11} \times \vartheta^4 + 2,000 \times 10^{-17} \times \vartheta^6)$$

Maximum permissible tolerance as a function of temperature (DIN 43760):

$$\vartheta < 0^\circ\text{C}: F = \pm(0,4 + 0,028 \times \vartheta) \text{ } ^\circ\text{C}$$

$$\vartheta > 0^\circ\text{C}: F = \pm(0,4 + 0,007 \times \vartheta) \text{ } ^\circ\text{C}$$

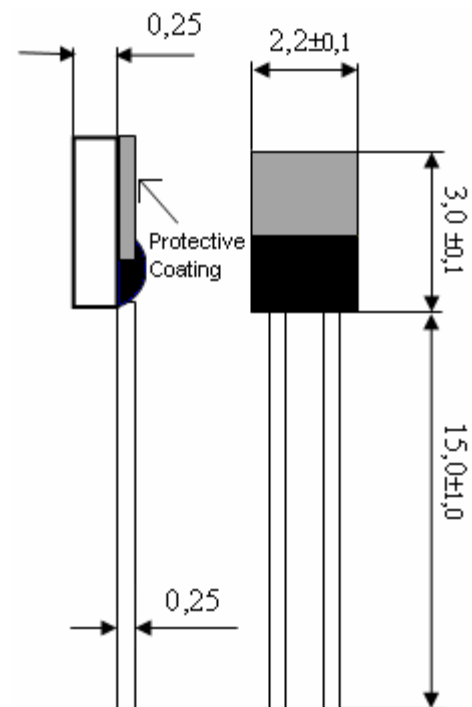

All technical data serves as a guideline and does not guarantee any particular properties to the product.

Heraeus Sensor Technology USA

1901 Route 130
North Brunswick, NJ 08902
Phone 732-940-4400 Fax 732-940-4445
Email info.hst-us@heraeus.com
www.hst-us.com

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com