



Series: iMOD™

Features:

- Built with patented THiNCAPS™
- Front terminal connections
- Lowest ESR in the industry
- High Voltage in a small space

Applications:

- Power conditioning
- Short term UPS
- Ride through power/voltage hold up
- Long life

Markets:

- Industrial
- Critical systems
- Hospitals
- Silicon production

Markings:

Products are marked with the following:

Rated capacitance, rated voltage, product number, name of manufacturer, positive and negative terminal marking.

Operating

Voltage, Rated	2.7 V/Cell
Voltage, Surge	2.85 V/Cell
Capacitance Tolerance	+10% / -0%

Temperature

Range, Operational	0°C to 50°C (At Rated Current)
Range, Storage	-25°C to 60°C

Life

DC	10 years, rated voltage, 25°C
	$\Delta C < 20\%$ decrease, ESR < 100% increase
Endurance	1000 hrs, rated voltage, 70°C
	$\Delta C < 20\%$ decrease, ESR < 100% increase
Shelf	1000 hrs, no voltage, 70°C
	$\Delta C < 20\%$ decrease, ESR < 100% increase
Cycle	> 500,000 cycles, Rated to half rated voltage, 25°C
	$\Delta C, 20\%$ decrease, ESR, 100% increase

Standards Compliance

RoHS



Product Specifications

Part Number	iMOD108V011P3U-12A	iMOD189V003P3U-02A	iMOD216V002P3U-11A
-------------	--------------------	--------------------	--------------------

Electrical

Capacitance (F)	11.4	3	2
ESR, DC $\leq$ (m Ω) [3ms]	16	103	89
Overvoltage Monitor	Yes	Yes	No
Voltage Rated (V)	108	189	216
Peak Voltage	114	200	228

Cycling

Current, Peak [1s] (A)	520	217	183
Continuous Current (A)*	32	13	35
Current, Short Circuit (A)	6700	1800	2400

Management


Balancing Method	Passive	Passive	Passive
------------------	---------	---------	---------

Energy/Power

E _{max} (Whr)	18	15	13
E _{max} (Whr/kg)	1.8	2.1	1.3
E _{max} (Whr/L)	2.0	2.2	1.0
P _{max} (kW/kg)	18.2	12.4	13.1
P _{max} (kW/L)	20.0	12.8	10.6
P _d (kW/kg)	8.7	5.9	6.3

Physical

W (mm) [max]	125	125	182
L (mm) hole center to H.C.	410	307	337
H (mm)	179	177	202
Mass (kg)	10	7	10
Volume (L)	9.1	7	12.4

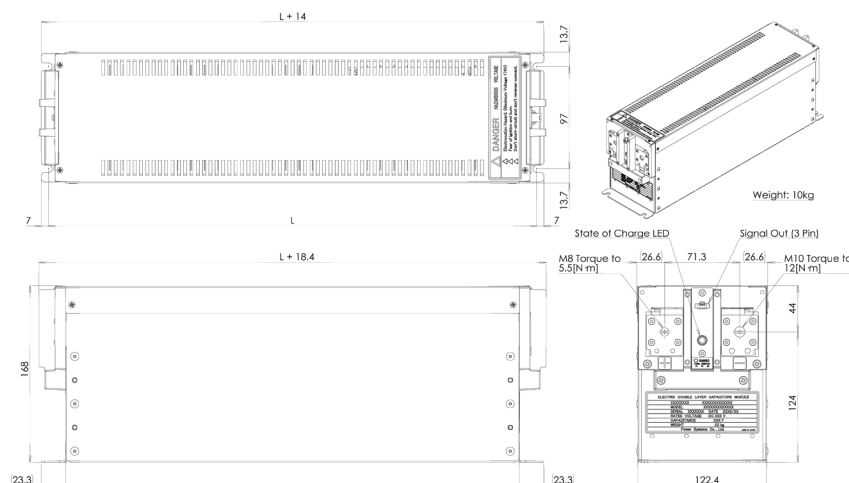

Additional Technical Information

Product specification test methods available in separate document.

*Rated current = continuous current with 20°C temperature rise.



18 Stadium Circle, Oneonta, NY 13820, USA

Toll Free: +1.877.751.4222

607.441.3500 | Fax: 607.433.9014

www.ioxus.com | info@ioxus.com

© 2012 Ioxus, Inc. | 121008

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com