


ENERGIZER 675 size




(top view) (bottom view)

Industry Standard Dimensions

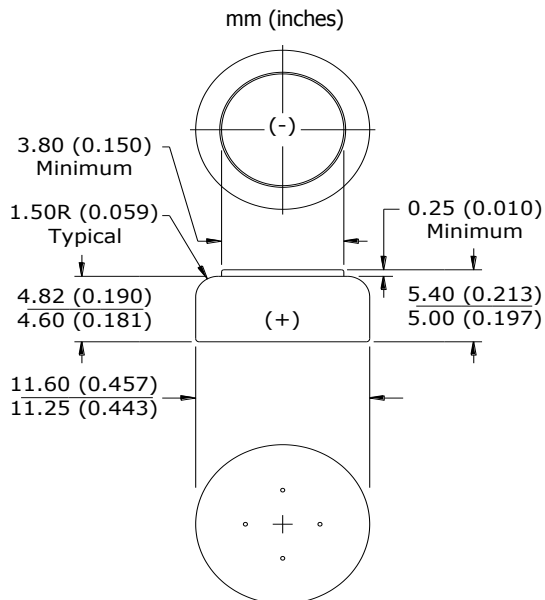

Typical Discharge Characteristics

ANSI/IEC Industry Standards / Intermittent Test Protocol
(620 ohm 12 hours per day at 21°C)

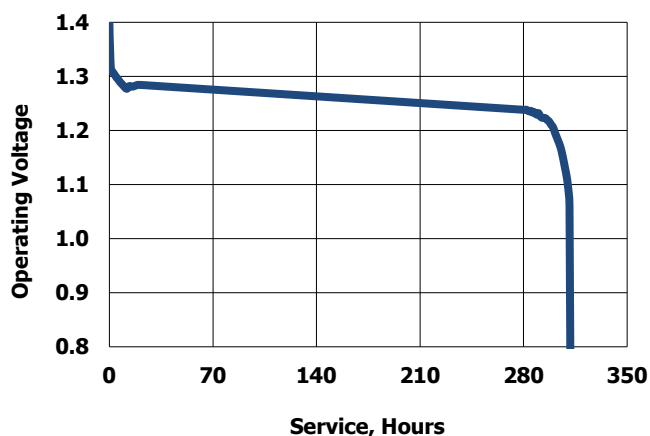


ZERO MERCURY[®] ZnAir

Specifications

Chemical System:	Zinc Air (Zn/O ₂)
Tab Color:	Blue
Designation:	ANSI-7003ZD, IEC-PR44
Nominal Voltage:	1.4 Volts
Typical Capacity:	620 mAh (to 0.9 volts) (Rated at 625 ohms at 21°C/50% RH)
Typical Weight:	1.9 grams (0.1 oz.)
Typical Volume:	0.5 cubic centimeters (0.03 cubic inch)


Typical Discharge Characteristics

IEC Industry Standards / Standard Test Protocol
(15/5 mA .1S/1H59M 59.9S 12H at 21°C)

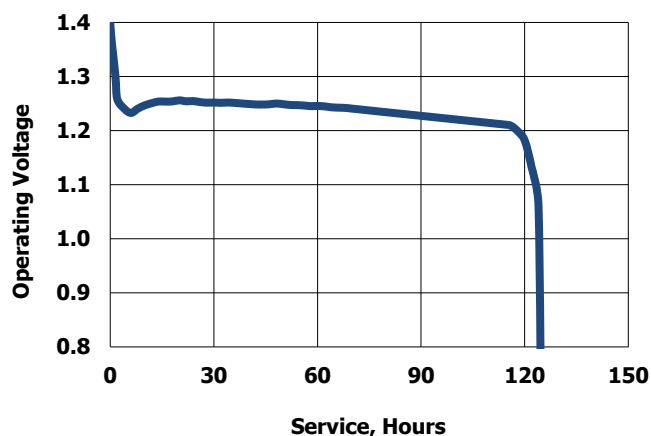

Typical Discharge Characteristics

IEC Industry Standards / High Drain Test Protocol
(24/8 mA .1S/1H59M 59.9S 12H at 21°C)

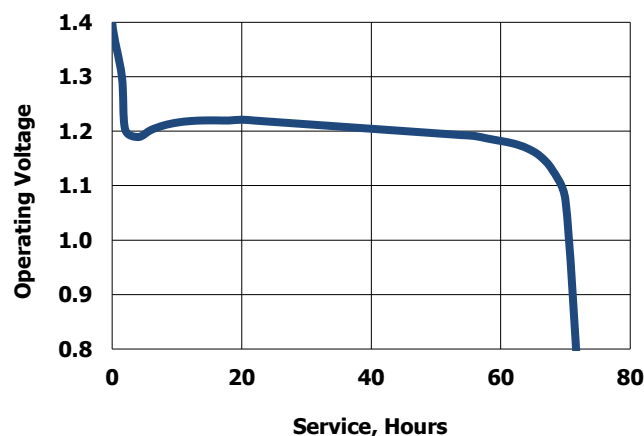

Important Notice

This data sheet contains typical information specific to products manufactured at the time of its publication.
©Energizer Brands, LLC - Contents herein do not constitute a warranty.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com