




- Louvers permit the passage of air for ventilation but limit liquid infiltration.
- Suitable for ventilation in electronic enclosures, motor housings and metal or plastic panels.
- Quick and easy installation with flexible orientation of louver direction.
- Withstand a push back force of 35 lbs. (47 Nm).
- Lock firmly into panel up to .250" (6,4 mm) thick.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Heyco Vent Plugs, Heyco Thick Panel Vent Plugs, and Heyco Liquid Tight Threaded Vent Plugs also available.

## Heyco® Louvered Plugs

Mounting Hole Diameter Range: .875" (22,2 mm) to 3.000" (76,2 mm)

MOUNTING HOLE DIAMETER		PART NO. Black	DESCRIPTION	PART DIMENSIONS			
in.	mm.			A Head Diameter		B Overall Height	
				in.	mm.	in.	mm.
<b>Multiple Locking Steps for Panel Thickness up to .125" (3,2 mm)</b>							
.875	22,2	2557	LP 875	1.02	25,8	.53	13,5
1.000	25,4	2559	LP 1000	1.21	30,6		
1.093 - 1.125	27,8 - 28,6	2561	LP 1093	1.22	30,9		
1.375	34,9	2567	LP 1375	1.50	38,1	.54	13,8
1.500	38,1	2569	LP 1500	1.68	42,6		
2.000	50,8	2594	LP 2000	2.17	55,1		
<b>Multiple Locking Steps for Panel Thickness up to .250" (6,4 mm)</b>							
2.500	63,5	2596	LP 2.5	2.72	69,0	.82	20,9
3.000	76,2	2598	LP 3.0	3.17	80,5		

Standard color black. Consult Heyco for other colors.

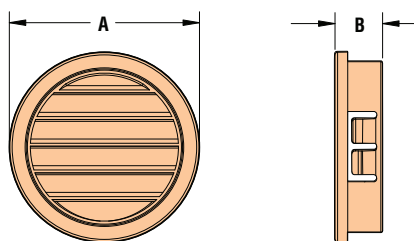

- Located behind the louvers, filter inserts permit the passage of air for ventilation but limit liquid as well as dust and pest infiltration.
- Polyurethane foam filter will filter particle sizes 30 micron and larger.

## HEYClean™ Filter Insert Louvered Plugs

Mounting Hole Diameter Range: .875" (22,2 mm) to 3.000" (76,2 mm)

MOUNTING HOLE DIAMETER		PART NO. Black	DESCRIPTION	PART DIMENSIONS			
in.	mm.			A Head Diameter		B Overall Height	
				in.	mm.	in.	mm.
<b>Multiple Locking Steps for Panel Thickness up to .125" (3,2 mm)</b>							
.875	22,2	4947	FILP 875	1.02	25,8	.53	13,5
1.000	25,4	4949	FILP 1000	1.21	30,6		
1.093 - 1.125	27,8 - 28,6	4951	FILP 1093	1.22	30,9		
1.375	34,9	4957	FILP 1375	1.50	38,1	.54	13,8
1.500	38,1	4959	FILP 1500	1.68	42,6		
2.000	50,8	4963	FILP 2000	2.17	55,1		
<b>Multiple Locking Steps for Panel Thickness up to .250" (6,4 mm)</b>							
2.500	63,5	4965	FILP 2.5	2.72	69,0	.82	20,9
3.000	76,2	4967	FILP 3.0	3.17	80,5		

Standard color black. Consult Heyco for other colors.

**ALL NEW PRODUCTS!**

*Quick Specs*

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Rating	-40°F (-40°C) to 221°F (105°C)

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)