

* PATENT PENDING

SPECIFICATIONS

Material: Silicone rubber conforms to A-A-59588, Class III, GR25 (unless otherwise specified).

Mounting Nut: Brass, black oxide

Temperature Range: -94° F to +400° F (-70° C to +204° C).





Pressure Range: Exceeds 15 psi internal and 1500 psi external.

Operational Life: 50,000 actuations (minimum).

Shelf Life: Excess of 25 years.

Resistant to: Salt spray, sunlight, ozone, weather, fungus, and most acids and lubricating oils.

Agency Recognition: UL & ULC Recognized to UL Std. 50

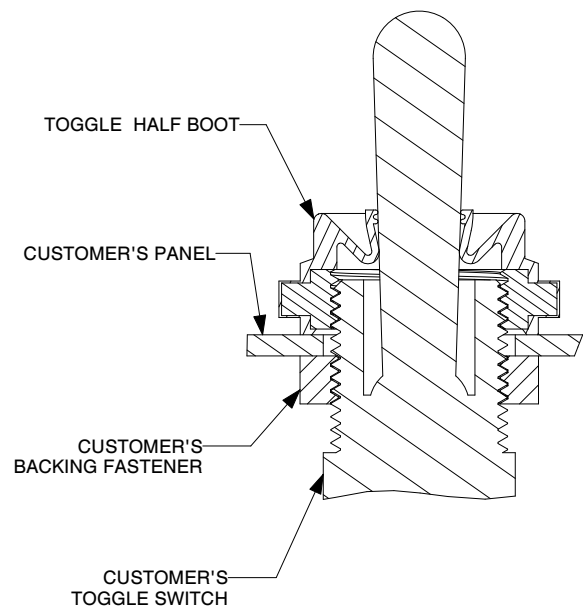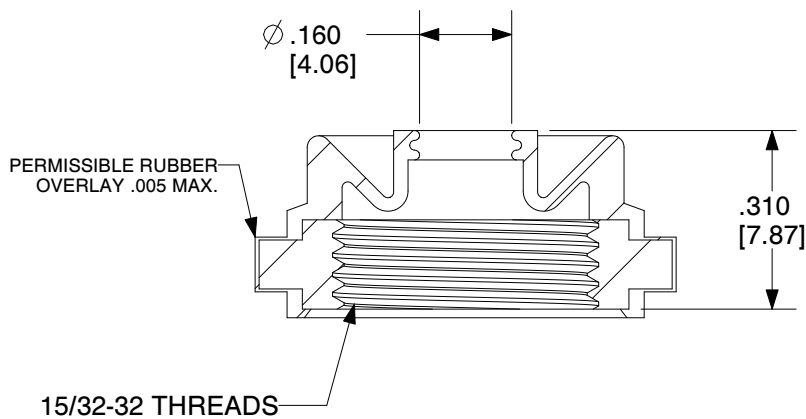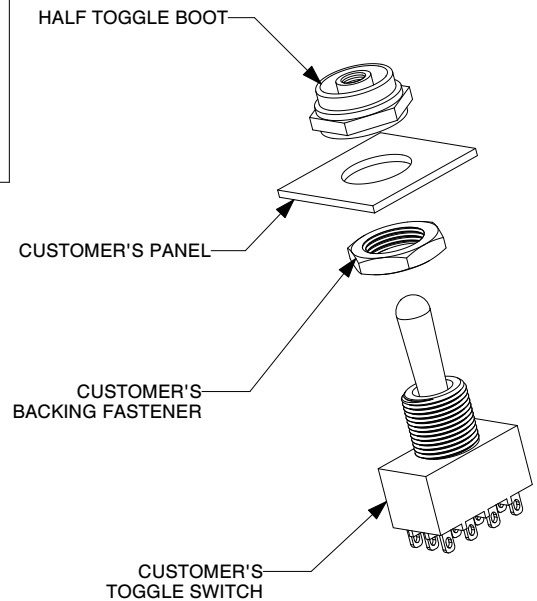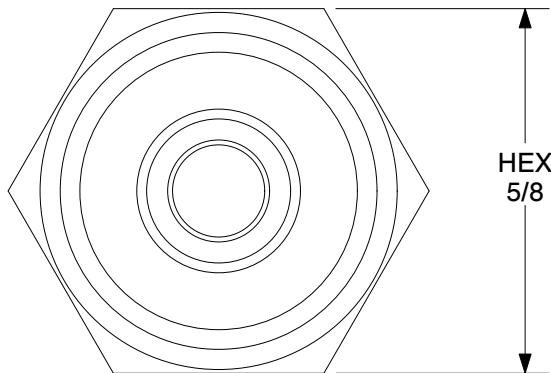

REV.	DESCRIPTION			DATE
MAXIMUM AND MINIMUM MEASUREMENTS ARE STATED DIRECTLY ON EACH DIMENSION.	TITLE: HALF BOOT, TOGGLE INVERTED BELLOWS			ENG. DAN LAW 09.26.13
				DWN: DAN LAW 09.26.13
MAT'L: SILICONE RUBBER PER A-A-59588 CLIII GR25	APM-HEXSEAL CORPORATION			CHKD KEN F. 10.14.13
FINISH: GRAY				SCALE NTS DWG_NO 1132/60

THIS DRAWING COVERS PROPRIETARY ITEM AND IS THE PROPERTY OF THE APM-HEXSEAL CORPORATION.
THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE WRITTEN APPROVAL OF AN OFFICER OF THE APM-HEXSEAL CORPORATION.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com