
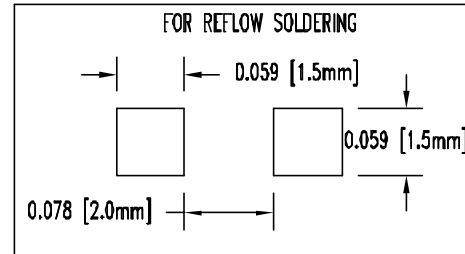


REV	DESCRIPTION	DATE	APPROVED
A	ENGINEERING RELEASE.	05/19/03	MC

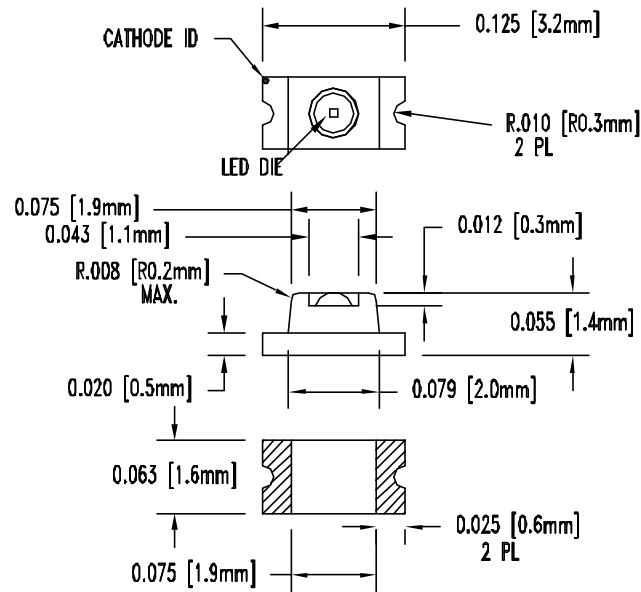

CAUTIONS: EMITS ULTRAVIOLET RADIATION!!

This device radiates intense ultraviolet (UV) light when operated.

Exposure to UV radiation can be harmful to your health. Protect your eyes and skin during operation.

Do not look directly at this device during operation. Exposure to UV light, even for a brief period, can damage your eyes.

Do not operate the device unless you have had proper safety training and take appropriate precautions.

Do not permit children or untrained personnel to operate the device.

LED Part No.	Chip						Lens Appearance	Absolute Maximum Ratings				Electro—Optical Data @ 20mA				Viewing Angle (Deg.)
	Material	Emitted Color	Peak Wave Length λ _p (nm)			Dom. Wave Length λ _d (nm) Typ.		Δλ (nm)	Pd (mW)	If (Typ) (mA)	Peak(If) (mA)	Vf(V)		Radiant Flux P(mW)	Optical Rise Time (t _{ns})	
			Min.	Typ.	Max.							Typ.	Max.			
SM1206UV—395—IL	InGaN	BLUE UV	390	395	400	430	WATER CLEAR	60	100	30	100	3.7	4.0	11.0	30	70
SM1206UV—400—IL	InGaN	BLUE UV	390	400	410	430	WATER CLEAR	60	100	30	100	3.7	4.0	12.0	30	70
SM1206UV—405—IL	InGaN	BLUE UV	400	405	410	430	WATER CLEAR	60	100	30	100	3.7	4.0	12.0	30	70


ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ\text{C}$)

ELECTROSTATIC DISCHARGE THRESHOLD (HBM)	1000V
ELECTROSTATIC DISCHARGE CLASSIFICATION (MIL-STD-883E)	CLASS 2 (CLASS 1 FOR UV)
LED JUNCTION TEMPERATURE	125°C
REVERSE VOLTAGE	5V
REVERSE CURRENT ($V_R=5V$)	10uA
OPERATING TEMPERATURE RANGE	-25°C ~ 85°C
STORAGE TEMPERATURE	-30°C ~ 100°C
LEAD SOLDERING TEMPERATURE(1/16" FROM BODY)	260°C FOR 5 SECONDS

Product resistance to electrostatic discharge (ESD) is measured by simulating ESD using a rapid avalanche energy test (RAET). The RAET procedures are designed to approximate the maximum ESD ratings shown. Seller gives no other assurances regarding the ability of Products to withstand ESD.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES		 Bivar® 4 THOMAS, IRVINE, CA.92618 TEL: (949) 951-8808 FAX: (949) 951-3974				
TOLERANCES						
<u>DECIMALS</u>	<u>ANGULAR</u>	 PART NAME: 1206 SMD LED, UV				
X ± .1	X° ± 1°					
.XX ± .02						
.XXX ± .010		 SIZE: A				
DESIGNER	DATE					
DAVID GREEN	05/19/03					
CHECKER	DATE	DWG NAME		DWG NO.	REV	
	05/19/03			SM1206UV-XXX-IL	A	
		SCALE 1=1		PAGE CODE 32559	SHEET 1 OF 2	

REV	DESCRIPTION	DATE	APPROVED
	SEE SHEET #1.		

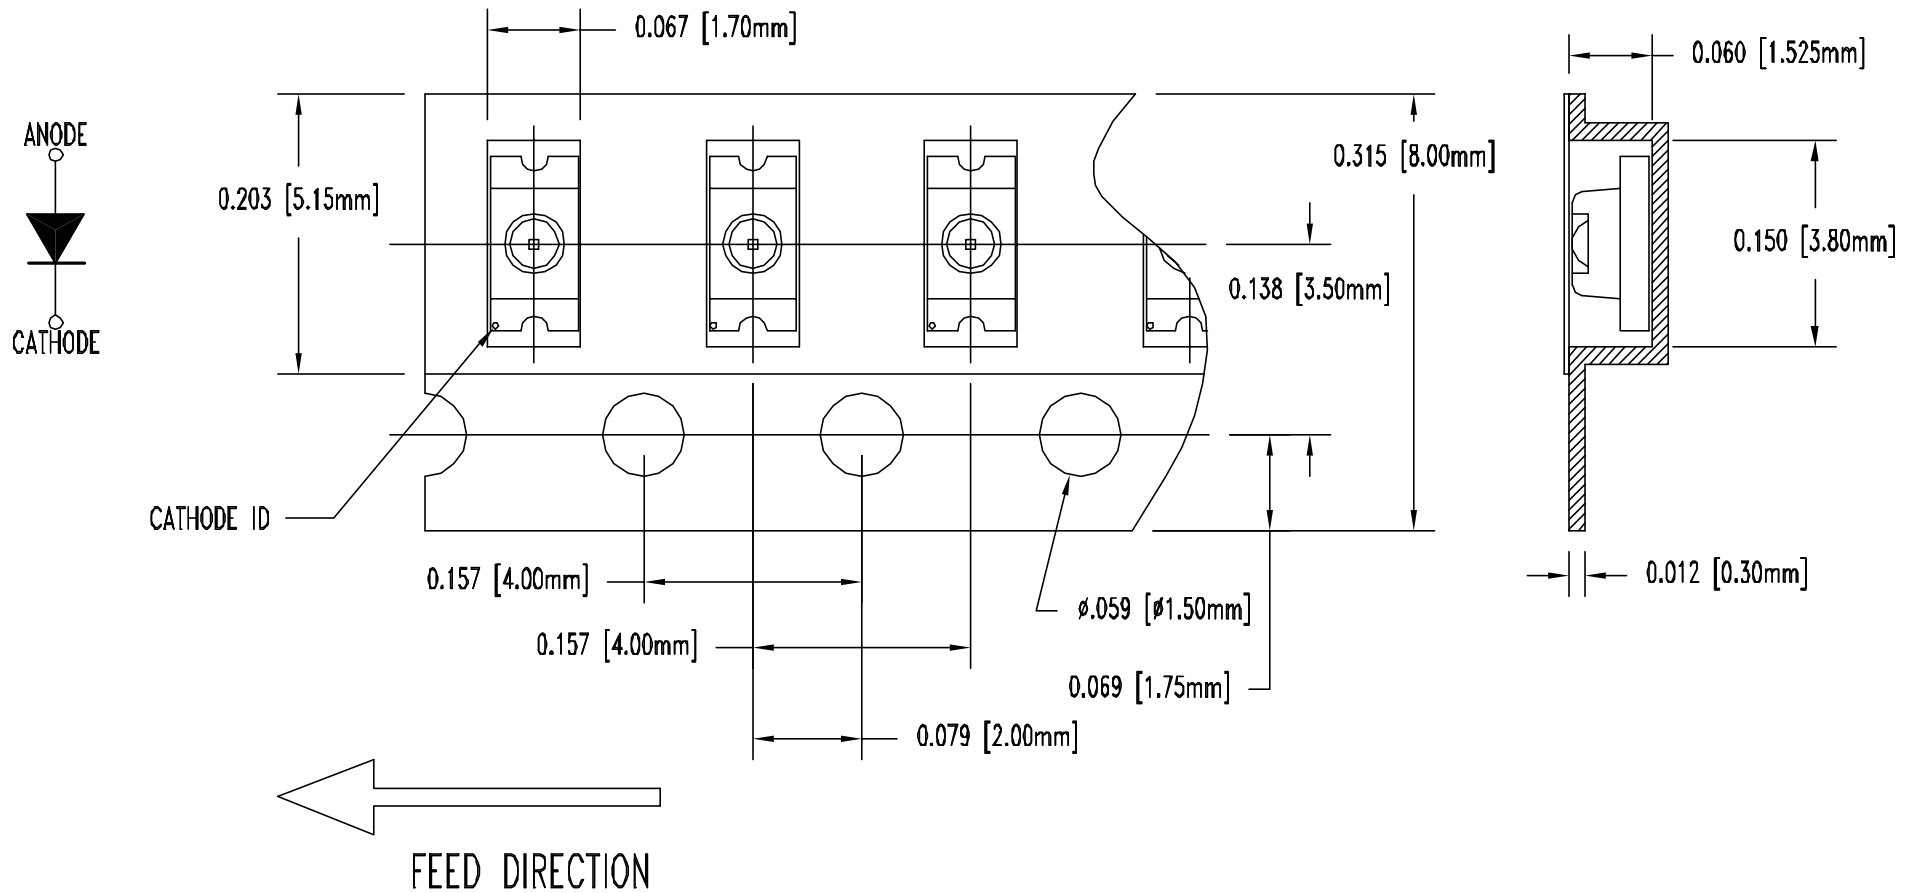

2. UNLESS OTHERWISE SPECIFIED,
PACKAGING TO COMPLY WITH EIA-481-B
1. 3000 pcs PER REEL

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES		Bivar® 4 THOMAS, IRVINE, CA.92618 TEL: (949) 951-8808 FAX: (949) 951-9074	
TOLERANCES			
<u>DECIMALS</u>	<u>ANGULAR</u>	PART NAME: 1206 SMD LED, UV	
.X ± .1	X° ± 1°		
.XX ± .02			
.XXX ± .010			
		SIZE A	
DESIGNER	DATE		
DAVID GREEN	05/19/03	DWG NO. SM1206UV-XXX-IL	
CHECKER	DATE	REV A	
M CHEN	05/19/03	SCALE 1=1 CAGE CODE 32559 SHEET 2 OF 2	

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com