

TY - 250 P

Description:

This transformer operates in the 20 Hz to 20,000 Hz range, making it suitable for a broad application spectrum in the audio industry. This device is used in line matching, telephone coupling, pulse trigger, driver, interstage, and isolation input and output applications.

Operating Temperature Range: -40° C to 105° C


Electrical Specifications at 25° C:

1. Primary Impedance: 1000Ω CT *
2. Secondary Impedance: 1000Ω CT / 250Ω *
3. Output: 20mW *
4. Primary DC Unbalance: 4 mA
5. Frequency Response: ± 1 db from 20 to 20,000 Hz
8. Insertion Loss @ 1K Hz: < 2.8 db
11. DCR: Primary (2-4) 172Ω □ □ Nominal □ □
Secondary (5-8, w/6-7 tied) 172Ω Nominal
12. Turns Ratio: 1:1 (tie 6&7)
2:1 (5 tied to 6 and 7 tied to 8)
13. Dielectric Strength: 1000V Primary to Secondary

Outline Dimensions:

- A. Dimensions: As shown
B. Weight: 0.4 oz.



Frequency Response:

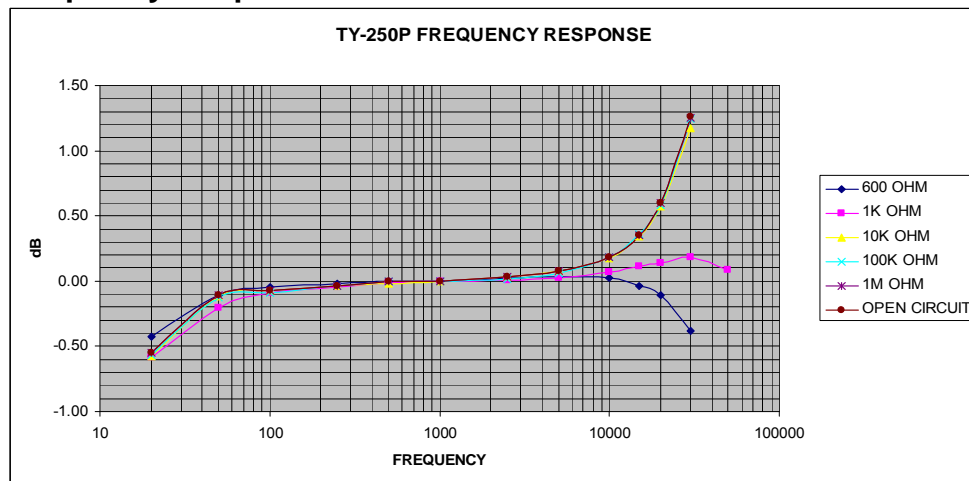

* 600:600Ω, 10K:10KΩ, 100K:100KΩ, 1M:1MΩ, and other impedances (secondaries can all be used at ¼ value when placed in parallel) are optional as long as input voltage is ≤ 4.2 Vrms and current is ≤ 7 mA.

RoHS Compliance: As of manufacturing date February 2005, all standard products meet the requirements of 2011/65/EU, known as the RoHS initiative.

Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

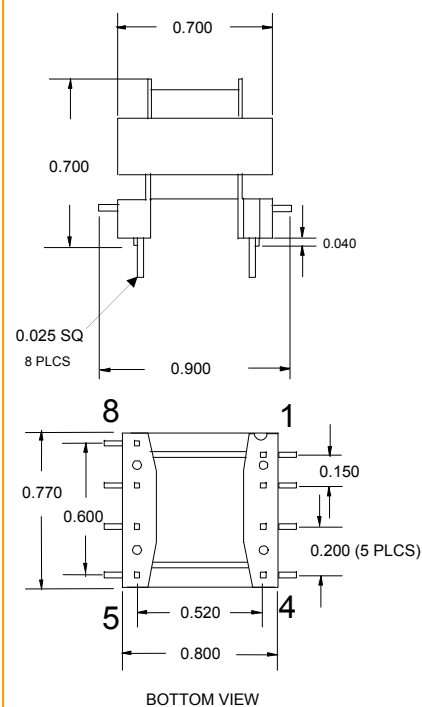

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com