

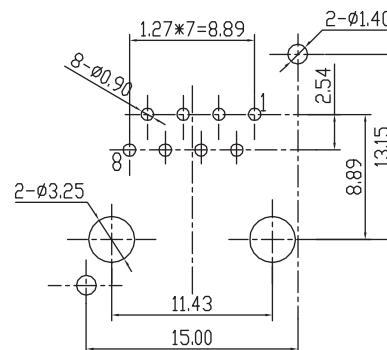


1	2	3	4	5
---	---	---	---	---

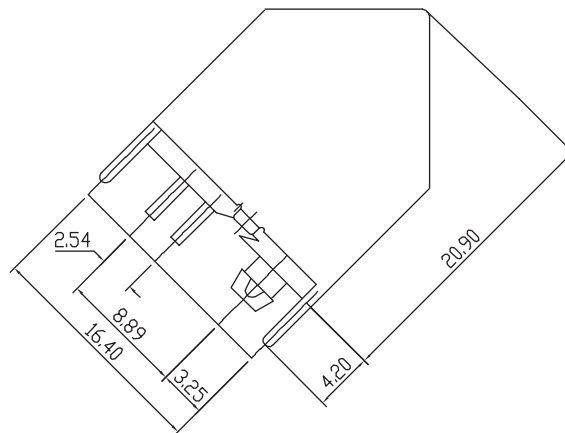

PCB LAYOUT - COMPONENT VIEW

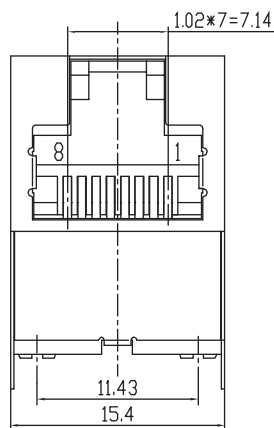

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR MATERIAL: PBT
FLAMMABILITY RATING: UL94-V0
COLOR: WHITE
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED
CONTACT PLATING: GOLD
SHIELDING: BRONZE NI PLATED
QUALITY CLASS: 500 MATING CYCLES


ENVIRONMENTAL
OPERATING TEMPERATURE: -40 °C UP TO 85 °C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
CURRENT RATING: 1.5 A
WORKING VOLTAGE: 125 VAC
INSULATION RESISTANCE: >500 MΩ
DIELECTRIC WITHSTANDING VOLTAGE: 1 000 VAC/MIN
CONTACT RESISTANCE: 20 mΩ MAX

STANDARD
 CERTIFIED: E324776

SOLDERING
JEDEC LEAD FREE WAVE SODLERING PROCESS

PACKAGING
TRAY

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = $\pm$ 0.2 .XX = $\pm$ 0.15	 WÜRTH ELEKTRONIK		
G								
F								
E	03-APR-14	DRAWING UPDATE	QL					
D	03-JAN-14	UL & TEMP UPDATE	QL					
C	07-JUL-10	NEW MEASURES	GG	APPROVAL: RJ	UNIT: MM	DESCRIPTION: 45° ENTRY SHIELDED 8P8C MODULAR JACK REVERSE MATAL POST TAIL		SIZE A4
B	08-OCT-09	NEW DRAW	JP		SCALE:			
A	23-FEB-09	PDF	JP		SHEET: 1/1	WERI PART NO: 615 008 145 121		
REV	DATE	FILE	BY		DRAW:			

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com