



- Features :


- 2:1 wide input range
- 4:1 wide input range(option)
- 1000VDC I/O isolation
- 3000VDC I/O isolation(option)
- Built-in EMI filter
- Protections: Short circuit / Overload
- Cooling by free air convection
- Six-sided shield metal case
- 100% burn-in test
- Low cost / High reliability
- Approvals: FCC / CE
- 2 years warranty



SPECIFICATION

ORDER NO.		SKE10A-05	SKE10B-05	SKE10C-05	SKE10A-12	SKE10B-12	SKE10C-12	SKE10A-15	SKE10B-15	SKE10C-15	SKE10A-24	SKE10B-24	SKE10C-24	
OUTPUT	DC VOLTAGE	5V			12V			15V			24V			
	CURRENT RANGE	200 ~ 2000mA			84 ~ 840mA			66.6 ~ 666mA			42 ~ 420mA			
	RATED POWER	10W												
	RIPPLE & NOISE (max.) Note.2	50mVp-p			60mVp-p			60mVp-p			80mVp-p			
	LINE REGULATION Note.3	±0.3%												
	LOAD REGULATION Note.4	±0.5%												
	VOLTAGE ACCURACY	±2.0%												
	SWITCHING FREQUENCY	200KHz min.												
INPUT	VOLTAGE RANGE	A: 9 ~ 18VDC B: 18 ~ 36VDC C: 36 ~ 72VDC												
	EFFICIENCY (Typ.)	78%	79%	80%	79%	81%	81%	80%	82%	82%	81%	82%	83%	
	DC CURRENT	Full load	A: 1100mA B: 530mA C: 270mA											
		No load	A: 28mA B: 16mA C: 8mA											
	FILTER	Pi network												
PROTECTION	Fuse recommended													
PROTECTION (Note. 5)	OVER CURRENT	160% ~ 250% rated output power												
		Protection type : Hiccup mode, recovers automatically after fault condition is removed												
	SHORT CIRCUIT	All output equipped with short circuit												
		Protection type : Hiccup mode, recovers automatically after fault condition is removed												
ENVIRONMENT	WORKING TEMP.	-25 ~ +71℃ (Refer to output load derating curve)												
	WORKING HUMIDITY	20% ~ 90% RH non-condensing												
	STORAGE TEMP., HUMIDITY	-25 ~ +105℃, 10 ~ 95% RH												
	TEMP. COEFFICIENT	±0.03% / ℃ (0 ~ 50℃)												
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes												
SAFETY & EMC	WITHSTAND VOLTAGE	I/P-O/P:1KVDC												
	ISOLATION RESISTANCE	I/P-O/P: 100M Ohms / 500VDC / 25℃ / 70% RH												
	EMC EMISSION	Compliance to EN55022 Class B, FCC part 15 Class B												
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8, light industry level, criteria A												
OTHERS	MTBF	500Khrs min. MIL-HDBK-217F(25℃)												
	DIMENSION	50.8*25.4*11.2mm or 2"*1"*0.44" inch (L*W*H)												
	WEIGHT	32g												


■ Mechanical Specification

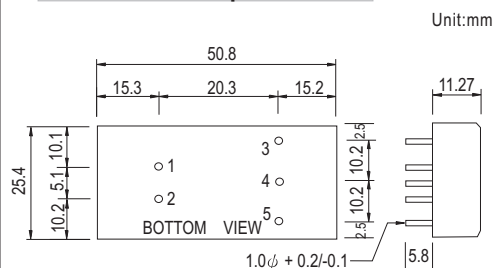

■ Pin Configuration

Pin no.	Output Single
1	+Vin
2	-Vin
3	+Vout
4	No Pin
5	-Vout

Derating Curve

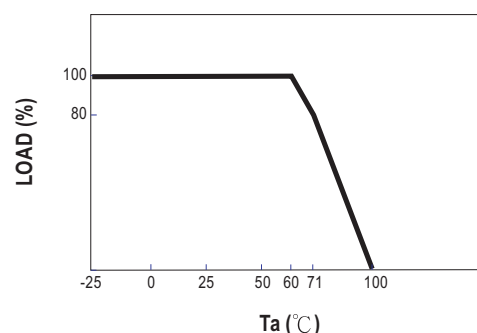

NOTE

- 1.All parameters are specified at normal input, rated load, 25°C 70% RH ambient.
- 2.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor.
- 3.Line regulation is measured from low line to high line at rated load.
- 4.Load regulation is measured from 10% to 100% rated load.
- 5.Please prevent the converter from operating in overload or short circuit condition for more than 30 seconds.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com