
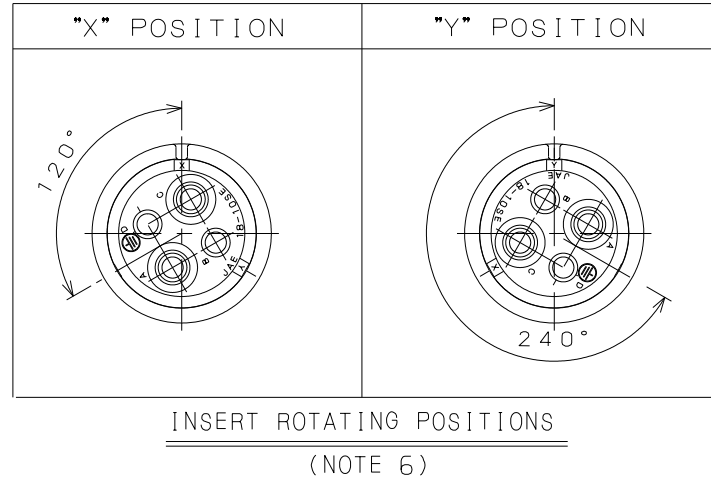


DOF-C-2139(11.08)

図面番号(DRAWING NO.) SJ105400




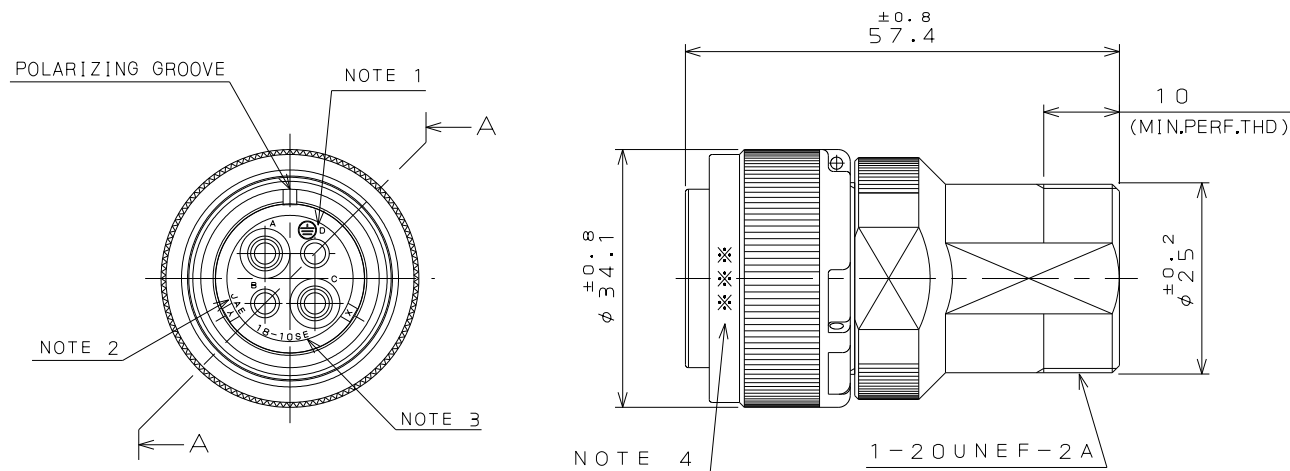


SPECIFICATION	
NUMBER OF CONTACT	4×#12
RATED VOLTAGE	500VAC POLLUTION DEGREE:2
	OVER VOLTAGE CATEGORY:Ⅱ
	: 250VAC POLLUTION DEGREE:3
	OVER VOLTAGE CATEGORY:Ⅲ
RATED CURRENT	23A MAX./ONE CONTACT
DIELECTRIC WITHSTANDING VOLTAGE	: 2000VAC
INSULATION RESISTANCE	: 5000MΩ MIN. (AT 500VDC)
APPLICABLE WIRE	: 3.5mm MAX.

仕様	
コンタクト	: #12コンタクト 4本
定格電圧	: 500VAC(汚染度:2/過電圧範疇:Ⅱ)
	: 250VAC(汚染度:3/過電圧範疇:Ⅲ)
定格電流	: 23A以下/1芯
耐電圧	: 2000VAC
絶縁抵抗	: 5000MΩ以上(500VDCにて)
適用電線	: 3.5mm以下

- NOTE 1. CONTACT POSITION NUMBER IS MARKED IN THE AREA SHOWN.
- EARTH MARK(⊕) IS MARKED NEAR BY CONTACT No. "D".
2. COMPANY LOGO "JAE" APPEARS IN THE AREA SHOWN.
3. CONTACT ARRANGEMENT NUMBER "18-10SE" IS MARKED IN THE AREA SHOWN.
4. PRODUCTION LOT NUMBER ARE MARKED AS INDICATED.
- ※※※ MANUFACTURER MONTH(1~9, X, Y, Z)
(JAN.~SEP., OCT., NOV., DEC.)
- MANUFACTURER YEAR('05, '06, '07, ...)
5. THIS PRODUCT HAVE TWO KINDS OF STRUCTURE OF PROTECTIVE EARTH CONTACT, EITHER SCREW TYPE OR EARTH LUG TYPE.
6. TO PREVENT MIS-MATING OF CONNECTOR, THERE ARE THREE INSERT ROTATING POSITIONS AVAILABLE: NORMAL, X, AND Y (POSITIONS IS DIFFERENT EACH OTHER). NORMAL POSITION IS SHOWN IN THE FRONT VIEW.

- 注1. 図示の位置に端子番号を表示する。
- 又、保護回路接続(D端子)は ⊕ で表す。
2. 図示の位置に社名【JAE】を表示する。
3. 図示の位置にインサート名【18-10SE】を表示する。
4. 図示の位置に製造ロットNo.を表示する。
- ※※※
- 製造月('1~9月, X:10月, Y:11月, Z:12月)
- 製造年('05, '06, '07, ...)
5. 本製品の保護回路接続構造は2種類あり、ねじタイプとアースラグタイプのどちらかとなります。
6. コネクタの誤嵌合防止の為、3つのインサート回転角度(互いに角度が異なる)ノーマル, X, Yポジションがある。正面図は、ノーマルポジションのものである。

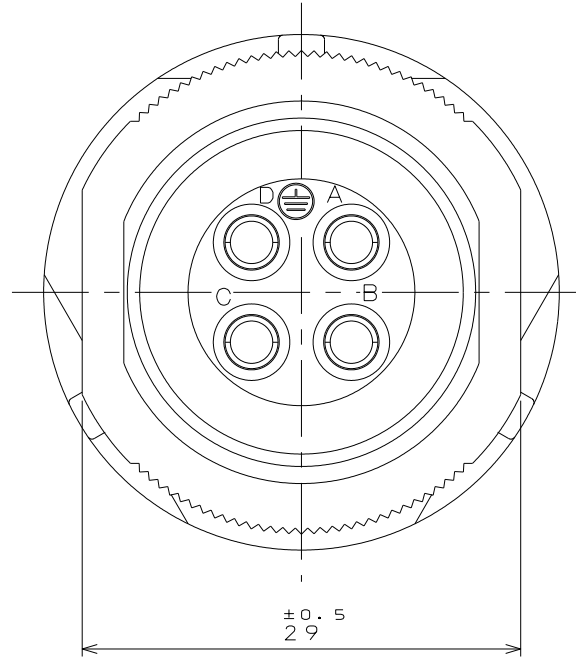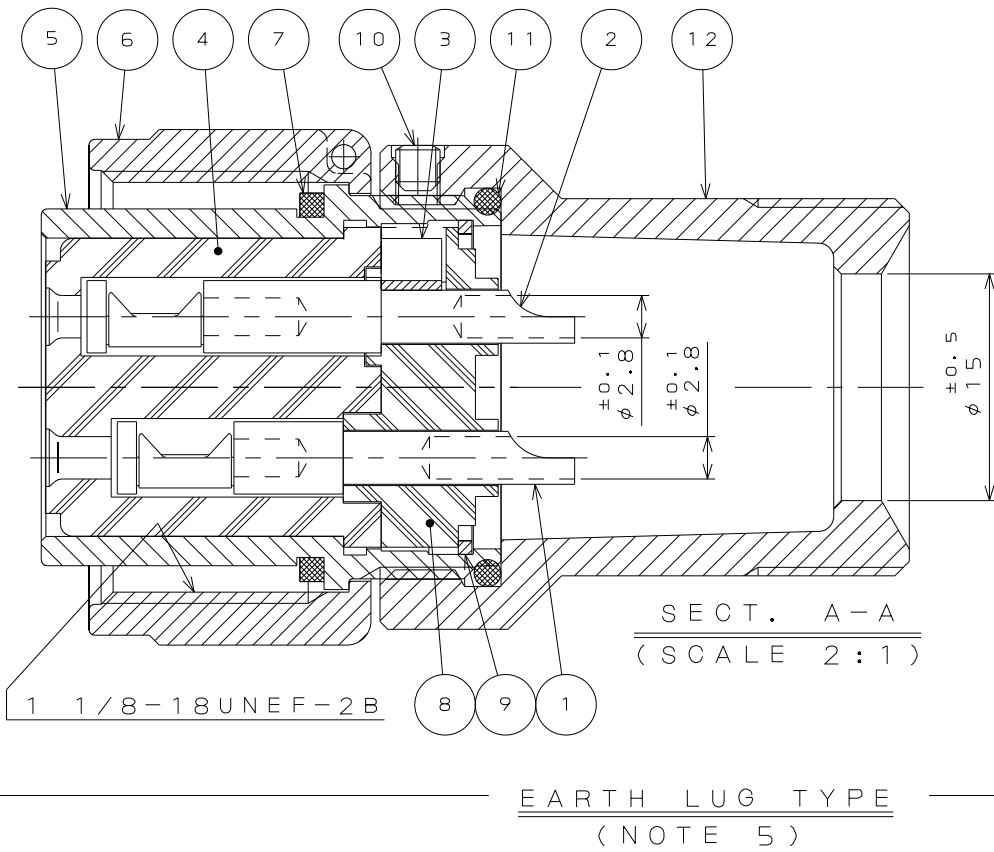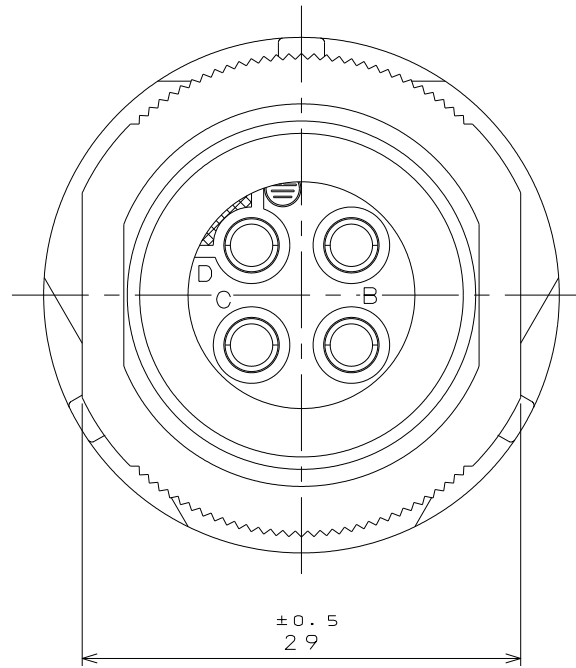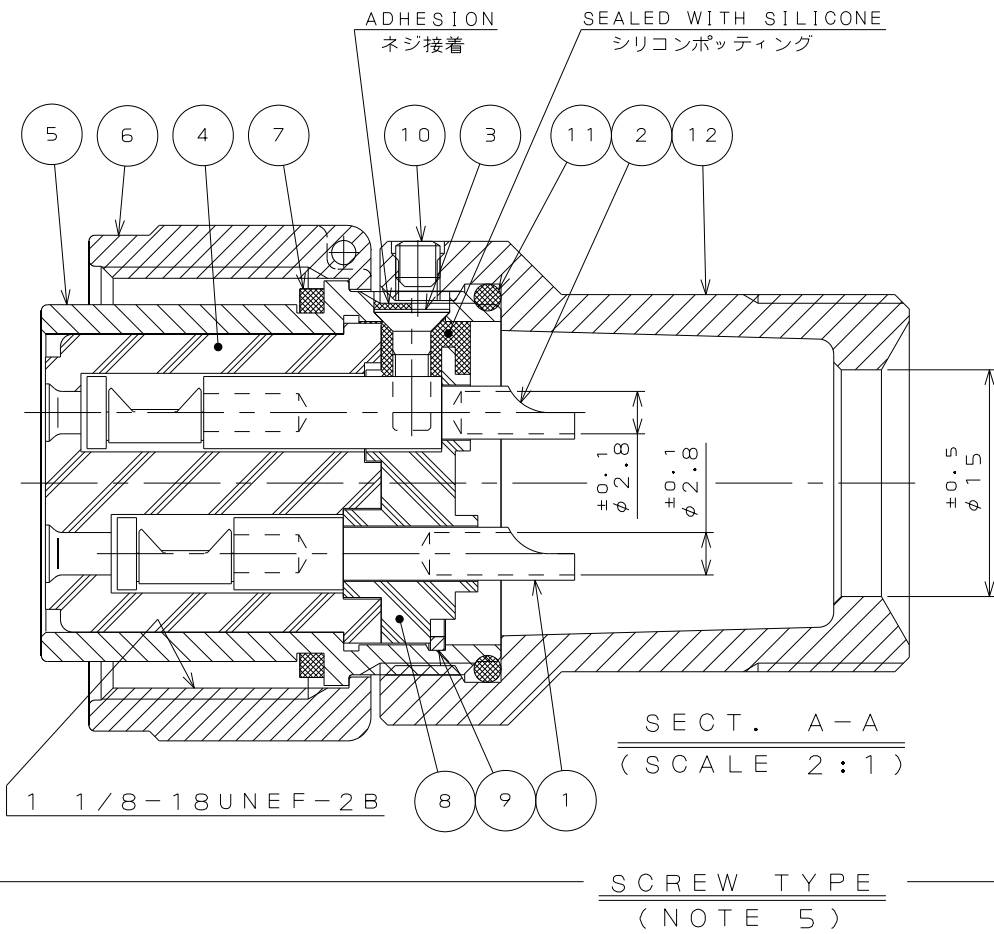

特別管理品目
SPECIAL CONTROL ITEM
T U V

12	STRAIGHT END BELL	1	ALUMINUM ALLOY	ZINC PLATING	COLOR:BLACK SYSTEM INTERFERENCE COLOR
11	"O"RING	1	SYNTHETIC RUBBER	NONE	
10	SET SCREW	1	STEEL	NICKEL PLATING △	COLOR:NONEorBLACK
9	RETAINING RING	1	COPPER ALLOY	ZINC PLATING	COLOR:BLACK SYSTEM INTERFERENCE COLOR
8	REAR INSULATOR	1	SYNTHETIC RESIN	NONE	COLOR:BLACK
7	GASKET	1	SYNTHETIC RUBBER	NONE	
6	COUPLING NUT	1	ALUMINUM ALLOY	ZINC PLATING	COLOR:BLACK SYSTEM INTERFERENCE COLOR
5	BARREL	1	ALUMINUM ALLOY	ZINC PLATING	COLOR:BLACK SYSTEM INTERFERENCE COLOR
4	FRONT INSULATOR	1	SYNTHETIC RESIN	NONE	COLOR:BLACK
3	SCREW(M2.5)	1	COPPER ALLOY	NICKEL PLATING	SCREW TYPE(NOTE 5)
	EARTH LUG		COPPER ALLOY	SILVER PLATING	EARTH LUG TYPE(NOTE 5)
2	CONTACT(EARTH)	1	COPPER ALLOY	SILVER PLATING	CONTACT NO. :D
1	CONTACT(LINE)	3	COPPER ALLOY	SILVER PLATING	CONTACT NO. :A, B, C
符号 NO.	名称 DESCRIPTION	個数 QTY.	材料 MATERIAL	仕上 FINISH	備考 REMARKS
仕様書(SPECIFICATION) JACS-5080 T95-4		第1版(ORIGINAL DATE) 14.Dec.2005		尺度(SCALE) 1:1	シリーズ(SERIES) JL04V
公差(GENERAL TOLERANCE)		製図 DR.		名称(TITLE)	JAE CONNECTOR
寸法(DIMENSION)	角度(ANGLES)	担当 CHK.	N.SASANO		日本航空電子工業株式会社
. ±0.8	X° ±	査閲 APPD.	T.OKAMURA		JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.
.X ±0.4	X°X' ±	承認 APPD.	A.ONOGAWA		
.XX ±0.1					
.XXX ±					
		質量(MASS)		図面番号(DRAWING NO.)	SJ105400
					版数(REV.) 2

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com