

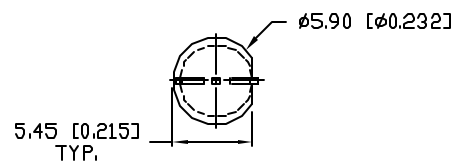


DATE	REVISIONS	REV
8-31-94	UPDATED SAFE OPER. SPECS.	A
2-1-95	UPDATED SPECS.	B
4-5-95	UPDATED SPECS.	C
9-7-95	CORRECTED DIMS WHERE NOTED.	D
3-18-98	E.C.N. #10BRDR. & REDRAWN./	E

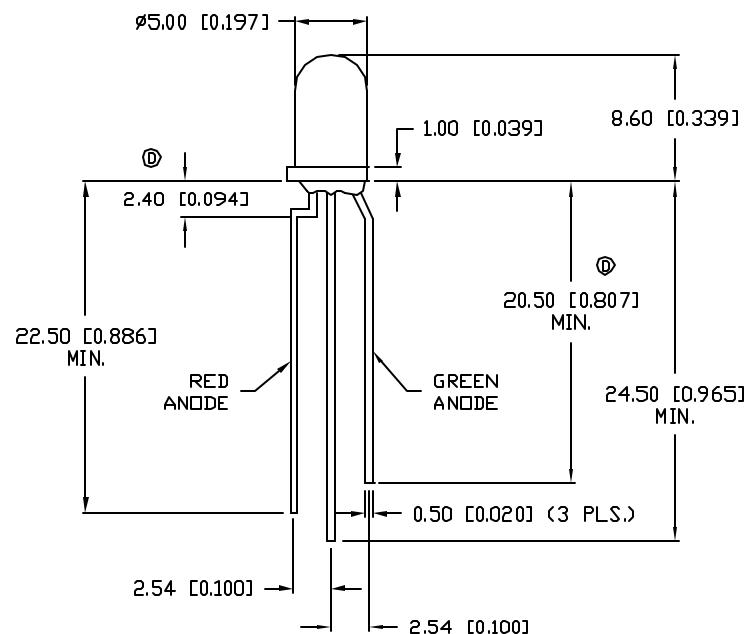

UNLESS OTHERWISE SPECIFIED TOLERANCE IS $\pm .25\text{mm}$ ($\pm 0.010"$)

DRAWING NUMBER				REV
SSL-LX50991GW				E
CHARACTERISTICS $T_A = 25^{\circ}\text{C}$ $I_f = 20\text{mA}$				
	TYP	MAX	UNITS	TEST COND
	635 (RED)		nm	
	565 (GREEN)		nm	
	2.0/2.2	2.5/2.6	V_f	$I_r = 100\mu\text{A}$
			V_r	$I_f = 20\text{mA}$
	55/45		med	
	60		2x theta	
GREEN				
WHITE DIFFUSED				
OPERATION AT 25°C				
	COLORS	MAX		UNITS
		150		mA
	(R/G)	30/25		mA
		105		mW
		-1.2		mW/ $^{\circ}\text{C}$
		-40 TO +85		$^{\circ}\text{C}$
		+260		$^{\circ}\text{C}$
				3 SEC. MAX
ANCE DATA ACCUMULATION INDICATE OR CAUSE OF EARLY AND FUTURE ON TO YOUR SOLDERING PROCESS.				
 290 E. HELLEN ROAD PALATINE, ILLINOIS 60067 (847) 359-2790				
CONFIDENTIAL INFORMATION DOCUMENT IS THE PROPERTY OF LUMEX INCORPORATED. IN WRITING BY LUMEX INCORPORATED, THE HOLDER OF FORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT CLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.				
OWN:		CHK'D:	APPD:	
3/4) LED, RED/GREEN BICOLOR, FFUSED LENS, COMMON CATHODE.				
DRAWING NUMBER				REV
SSL-LX50991GW				E

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com