

Multilayer Ceramic Capacitors (100V, 200V Series)

Series: **ECJ**




■ Features

- Small size and wide capacitance range
- High humidity resistance and long life
- Low inductance (ESL) and excellent frequency characteristics
- RoHS compliant

■ Handling Precautions

See Page 48 to 53

■ Explanation of Part Numbers

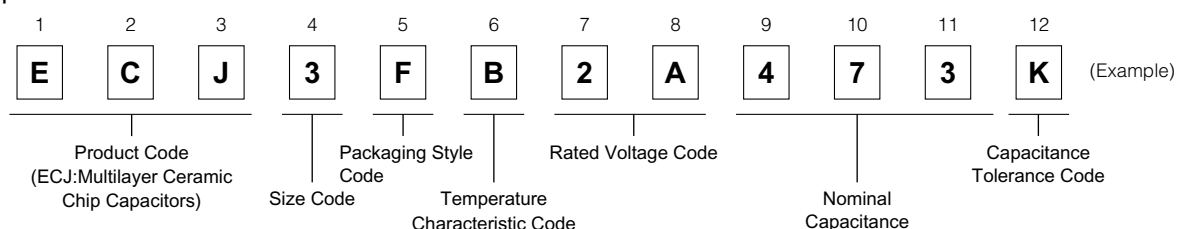


■ Recommended Applications

- Noise limiting, coupling, time constant and oscillation circuitry

■ Packaging Specifications


See Page 45, 46, 56

■ Construction

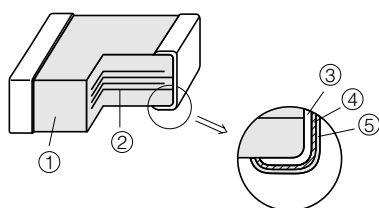

No	Name
①	Ceramic dielectric
②	Internal electrode
③	Substrate electrode
④	Intermediate electrode
⑤	External electrode

■ Dimensions in mm (not to scale)



Size Code	Size (EIA)	L	W	T	L ₁ , L ₂
1	0603	1.6±0.1	0.8±0.1	0.8±0.1	0.3±0.2
2	0805	2.0±0.1	1.25±0.10	0.85±0.10 1.25±0.10	0.50±0.25
3	1206	3.20±0.15 3.2±0.2	1.60±0.15 1.6±0.2	0.85±0.10 1.15±0.10 1.6±0.2	0.6±0.3
4	1210	3.2±0.3	2.5±0.3	2.0±0.2 2.5±0.3	0.6±0.3

■ Packaging Styles and Standard Packaging Quantities

Quantity : pcs./reel

Packaging Style Code	Size		0603	0805		1206			1210	
	Thickness (mm)		T=0.8	T=0.85	T=1.25	T=0.85	T=1.15	T=1.6	T=2.0	T=2.5
V	ø180 reel	Paper taping (Pitch: 4 mm)	4,000	4,000	—	4,000	—	—	—	—
F		Embossed taping (Pitch: 4 mm)	—	—	3,000	—	3,000	—	—	—
Y			—	—	—	—	—	2,000	2,000	1,000

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

00 Sep. 2008

■ Temperature Characteristics

● Class 1

Temperature Characteristic Code	Temperature Characteristics	Temp. Coeff. (ppm/°C)	Rate of Capacitance change at each Temp. (%)			
			-25 °C		85 °C	
			max.	min.	max.	min.
C	CH	0 ± 60	0.49	-0.27	0.39	-0.39

Note: Temperature coefficient: calculated between 20 °C to 85 °C

● Class 2

Temperature Characteristic Code	Temperature Characteristics	Capacitance Change	Measurement Temperature Range	Reference Temperature
B	B	±10 %	-25 to 85 °C	20 °C
	X7R	±15 %	-55 to 125 °C	25 °C

For applicable "temperature characteristics", see the lists of standard products on page 34 to 35.

■ Rated Voltage

Code	2A	2D
Rated Voltage	DC 100 V	DC 200 V

■ Nominal Capacitance

Ex.	100	101	104	105
Nominal Capacitance	10 pF	100 pF	100,000 pF (0.1 μF)	1,000,000 pF (1.0 μF)

■ Capacitance tolerance

Class	Temperature Characteristics			Tolerance Code	Capacitance Tolerance
1	CH	Capacitance range	C=10 pF	D	±0.5 pF
			C>10 pF	J	±5 %
				K	±10 %
2	B, X7R			K	±10 %
				M	±20 %

■ Specifications and Testing Methods

Item	Specifications		Test Method
	Class 1	Class 2	
Operating Temperature Range	-55 to 125 °C		—
Dielectric Withstanding Voltage	No dielectric breakdown and/or damage		Test voltage: Class 1: Rated voltage × 300 % Class 2: Rated voltage × 250 % Duration: 1 to 5 s Charge/discharge current: 50 mA max.
Insulation Resistance (IR)	10000 MΩ or 500/C (MΩ) Whichever is less C: Nominal Cap. in μF		Measuring voltage: Rated voltage Duration: 60±5 s Charge/discharge current: 50 mA max.
Capacitance	Within the specified tolerance		Measuring temperature: 20±2 °C
Q Factor or Dissipation Factor (tan δ)	Q: C < 30 pF: Q≥400+20 C 30 pF≤C≤1000 pF: Q≥1000 tan δ: C > 1000 pF: tan δ≤0.002 C: Nominal Cap. in pF	tan δ:0.025 max.	Class 1
			Nominal capacitance
			C ≤ 1000 pF
			C > 1000 pF
			Measuring frequency
			1 MHz±10 %
			1 kHz±10 %
			Measuring voltage
			0.5 to 5 Vrms
			0.5 to 5 Vrms
			Class 2
			Preconditioning: The capacitors shall be kept in temperature of 150 +0/-10 °C for 1 hour and subjected to standard conditions* for 48±4 hours before initial measurement.
			Nominal capacitance
			C≤1 μF
			Measuring frequency
			1 kHz±10 %
			Measuring voltage
			1.0±0.2 Vrms

* Standard condition: Temperature 15 to 35 °C, Relative humidity 45 to 75 %.
For further information, see the technical specifications.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

Standard Products for EIA Size "0603", Taped Version

Class 1

◆ Temp. Char. Code: C (Temp. Char.: CH)

Rated voltage		DC 100 V		
Capacitance (pF)	Capacitance Tolerance	Part No.	Dim. T (mm)	Temp. Char. CH
10	±0.5 pF (D)	ECJ1VC2A100D	0.8	○
15	±5 % (J) or ±10 % (K)	ECJ1VC2A150□	0.8	○
22		ECJ1VC2A220□	0.8	○
33		ECJ1VC2A330□	0.8	○
47		ECJ1VC2A470□	0.8	○
68		ECJ1VC2A680□	0.8	○
100		ECJ1VC2A101□	0.8	○

□: Capacitance tolerance code.

Standard packaging quantity of Packaging Style Code "V" (T = 0.8 mm): 4,000 pcs./reel

Class 2

◆ Temp. Char. Code: B (Temp. Char.: B, X7R)

Rated voltage		DC 100 V			DC 200 V		
Capacitance (pF)	Capacitance Tolerance	Part No.	Dim. T (mm)	Temp. Char. B X7R	Part No.	Dim. T (mm)	Temp. Char. B X7R
220	±10 % (K) or ±20 % (M)	ECJ1VB2A221□	0.8	○ ○	ECJ1VB2D221□	0.8	○ ○
330		ECJ1VB2A331□	0.8	○ ○	ECJ1VB2D331□	0.8	○ ○
470		ECJ1VB2A471□	0.8	○ ○	ECJ1VB2D471□	0.8	○ ○
680		ECJ1VB2A681□	0.8	○ ○	ECJ1VB2D681□	0.8	○ ○
1000		ECJ1VB2A102□	0.8	○ ○	ECJ1VB2D102□	0.8	○ ○

□: Capacitance tolerance code.

Standard packaging quantity of Packaging Style Code "V" (T = 0.8 mm): 4,000 pcs./reel

Standard Products for EIA Size "0805", Taped Version

Class 1

◆ Temperature Characteristic Code: C (Temperature Characteristics: CH)

Rated voltage		DC 100 V			DC 200 V		
Capacitance (pF)	Capacitance Tolerance	Part No.	Dim. T (mm)	Temp. Char. CH	Part No.	Dim. T (mm)	Temp. Char. CH
10	±0.5 pF (D)	ECJ2VC2A100D	0.85	○	ECJ2VC2D100D	0.85	○
15	±5 % (J) or ±10 % (K)	ECJ2VC2A150□	0.85	○	ECJ2VC2D150□	0.85	○
22		ECJ2VC2A220□	0.85	○	ECJ2VC2D220□	0.85	○
33		ECJ2VC2A330□	0.85	○	ECJ2VC2D330□	0.85	○
47		ECJ2VC2A470□	0.85	○	ECJ2VC2D470□	0.85	○
68		ECJ2VC2A680□	0.85	○	ECJ2FC2D680□	1.25	○
100		ECJ2VC2A101□	0.85	○	ECJ2FC2D101□	1.25	○
150		ECJ2VC2A151□	0.85	○	ECJ2FC2D151□	1.25	○
220		ECJ2VC2A221□	0.85	○	ECJ2FC2D221□	1.25	○
330		ECJ2VC2A331□	0.85	○	ECJ2FC2D331□	1.25	○
470		ECJ2VC2A471□	0.85	○			
680		ECJ2VC2A681□	0.85	○			
1000		ECJ2VC2A102□	0.85	○			

□: Capacitance tolerance code : "□" for "J" or "K"

Standard packaging quantity of Packaging Style Code "V" (T = 0.85 mm): 4,000 pcs./reel, "F" (T = 1.25 mm): 3,000 pcs./reel

Soldering method of dimension T>1 mm: Avoid flow soldering.

Class 2

◆ Temperature Characteristics Code: B (Temperature Characteristics: B, X7R)

Rated voltage		DC 100 V			DC 200 V		
Capacitance (pF)	Capacitance Tolerance	Part No.	Dim. T (mm)	Temp. Char. B X7R	Part No.	Dim. T (mm)	Temp. Char. B X7R
220	±10 % (K) or ±20 % (M)	ECJ2VB2A221□	0.85	○ ○	ECJ2VB2D221□	0.85	○ ○
330		ECJ2VB2A331□	0.85	○ ○	ECJ2VB2D331□	0.85	○ ○
470		ECJ2VB2A471□	0.85	○ ○	ECJ2VB2D471□	0.85	○ ○
680		ECJ2VB2A681□	0.85	○ ○	ECJ2VB2D681□	0.85	○ ○
1000		ECJ2VB2A102□	0.85	○ ○	ECJ2VB2D102□	0.85	○ ○
1500		ECJ2VB2A152□	0.85	○ ○	ECJ2VB2D152□	0.85	○ ○
2200		ECJ2VB2A222□	0.85	○ ○	ECJ2VB2D222□	0.85	○ ○
3300		ECJ2VB2A332□	0.85	○ ○	ECJ2VB2D332□	0.85	○ ○
4700		ECJ2VB2A472□	0.85	○ ○	ECJ2VB2D472□	0.85	○ ○
6800		ECJ2VB2A682□	0.85	○ ○	ECJ2FB2D682□	1.25	○ ○
10000		ECJ2VB2A103□	0.85	○ ○	ECJ2FB2D103□	1.25	○ ○
15000		ECJ2FB2A153□	1.25	○ ○			

□: Capacitance tolerance code : "□" for "K" or "M"

Standard packaging quantity of Packaging Style Code "V" (T = 0.85 mm): 4,000 pcs./reel, "F" (T = 1.25 mm): 3,000 pcs./reel

Soldering method of dimension T>1 mm: Avoid flow soldering.

■ Standard Products for EIA “1206”, Taped Version

● Class 1

- ◆ Temperature Characteristic Code: C (Temperature Characteristics: CH)

Rated voltage		DC 100 V			DC 200 V		
Capacitance (pF)	Capacitance Tolerance	Part No.	Dim. T (mm)	Temp. Char. CH	Part No.	Dim. T (mm)	Temp. Char. CH
470	±5 % (J) or ±10 % (K)				ECJ3FC2D471□	1.15	○
680					ECJ3FC2D681□	1.15	○
1000					ECJ3FC2D102□	1.15	○
1500		ECJ3VC2A152□	0.85	○			
2200		ECJ3VC2A222□	0.85	○			
3300		ECJ3VC2A332□	0.85	○			

□: Capacitance tolerance code : “□” for “J” or “K”

Standard packaging quantity of Packaging Style Code “V” (T = 0.85 mm): 4,000 pcs./reel, “F” (T = 1.15 mm): 3,000 pcs./reel

Soldering method of dimension T>1 mm: Avoid flow soldering.

● Class 2

- ◆ Temperature Characteristic Code: B (Temperature Characteristics: B, X7R)

Rated voltage		DC 100 V			DC 200 V		
Capacitance (pF)	Capacitance Tolerance	Part No.	Dim. T (mm)	Temp. Char. B X7R	Part No.	Dim. T (mm)	Temp. Char. B X7R
15000	±10 % (K) or ±20 % (M)				ECJ3FB2D153□	1.15	○ ○
22000		ECJ3FB2A223□	1.15	○ ○	ECJ3FB2D223□	1.15	○ ○
33000		ECJ3FB2A333□	1.15	○ ○			
47000		ECJ3FB2A473□	1.15	○ ○			
100000		ECJ3YB2A104□	1.6	○ ○			

□: Capacitance tolerance code : “□” for “K” or “M”

Dimensional tolerance of L, W, T: L, W: ± 0.15 mm / T: ± 0.1 mm for T=1.15, ± 0.2 mm for T=1.6

Standard packaging quantity of Packaging Style Code “F” (T = 1.15 mm): 3,000 pcs./reel, “Y” (T = 1.6 mm): 2,000 pcs./reel

Avoid flow soldering.

■ Standard Products for EIA “1210”, Taped Version

● Class 2

- ◆ Temperature Characteristic Code: B (Temperature Characteristics: B)

Rated voltage		DC 100 V		
Capacitance (μF)	Capacitance Tolerance	Part No.	Dim. T (mm)	Temp. Char. B X7R
0.22	±10 % (K) or ±20 % (M)	ECJ4YB2A224□	2.0	○ ○
0.47		ECJ4YB2A474□	2.0	○ ○
0.68		ECJ4YB2A684□	2.5	○ ○

□: Capacitance tolerance code : “□” for “K” or “M”

Dimensional tolerance of L, W, T: L, W: ± 0.3 mm / T: ± 0.2 mm for T=2.0, ± 0.3 mm for T=2.5

Standard packaging quantity : 2,000 pcs./reel for T = 2.0 mm, 1,000 pcs./reel for T = 2.5 mm

Avoid flow soldering.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com