Gas Discharge Tube (GDT) Products CG5 and SL0902A Series

RoHS (Ph)

CG5 and SL0902A Series





Agency Approvals

AGENCY	AGENCY FILE NUMBER
<i>.</i> R _®	E128662

2 Electrode GDT Graphical Symbol



Description

Littelfuse Broadband Optimized™ SL0902A Series offers high surge ratings in a miniature package. Special design features provide high levels of protection against fast rising transients in the 100V/µs to 1kV/µs range usually caused by lightning disturbances. Low insertion loss is perfectly suited to broadband equipment applications. The capacitance does not vary with voltage, and will not cause operational problems with ADSL2+, where capacitance variation across Tip and Ring is undesirable. These devices are extremely robust and are able to divert a 2500A pulse without destruction. For AC Power Cross of long duration, overcurrent protection is recommended.

Littelfuse CG5 MS mini surge arresters are specifically designed for protection of electrical and communication equipment against over voltage transients in surface mount assembly applications. This series offers the most cutting edge protection using non-radioactive elements.

Features

- RoHS compliant and Lead-free
- GHz working frequency
- Excellent stability on multiple pulse duty cycle
- Excellent response to fast rising transients.
- Ultra Low Insertion Loss
- 2.5KA surge capability tested with 8/20µS pulse as defined by IEC 61000-4-5
- Ultra small devices offered in a variety of mounting lead forms
- Non-Radioactive
- Low capacitance (<1pF)
- Voltage Ranges 90V to 600V
- UL recognized
- Conforms to ITU-T K12, IEC 1000-4-5

Applications

- Communication equipment
- CATV equipment
- Test equipment
- Data lines
- Power supplies
- Telecom SLIC protection

- Broadband equipment
- ADSL equipment, including ADSL2+
- XDSL equipment
- Satellite and CATV equipment
- General telecom equipment

Customer should verify actual device performance in their specific applications.

Gas Discharge Tube (GDT) Products CG5 and SL0902A Series



Electrical Characteristics

	Device Specifications (at 25°C)						Life Ratings								
	DC Breakdown in Volts (@100V/s)		Impulse Breakdown in Volts (@100V/µs)	Impulse Breakdown In Volts (@1 Kv/µsec)	Insulation Resistance		Surge Life (10/1000µs)	Nominal Impulse Discharge Current (8/20µs)	Nominal AC Discharge Current (10x1sec @50-60Hz)	AC Dischage Current (9 cycle @50Hz)	Max Impulse Discharge Current (1 Application @ 10/350µs)				
Part Number	MIN	TYP	MAX	MAX		MIN	MAX								
SL0902A90 CG5-90	72	90	108	550	700	10 ¹⁰ Ω (at 50V)		300 shots (@100A)	10 shots (@5kA) ⁵	5 A	10 A	0.5kA			
CG5-145	116	145	174	550	650										
CG5-150	120	150	180	550		10 ¹⁰ Ω 1.5 pf (at 100V)									
SL0902A230 CG5-230	184	230	276	550	650										
CG5-250	200	250	300	600											
CG5-270	216	270	324	650			10 32		300 shots (@100A)	10 shots (@5kA) ⁵	5 A	10 A	0.5kA		
SL0902A350 CG5-350	280	350	420	800	900										
CG5-400	320	400	480	900											
SL0902A420	336	420	504	900	1000										
CG5-550	440	550	660	1350											
SL0902A600 CG5-600	480	600	720	1350	1500										

Product Characteristics

Materials


CG5L & CG5LTR (Outline 502), CG5L-02 (Outline 503), CG5LS (Outline 500), CG5L-01 (Outline 504) & CG5L-

03: Device Nickel Plated 2–5 Microns Wire Tin Plated 17.5±12.5 Microns Construction Ceramic Insulator.

CG5 (Outline 501), CG5MS (Outline 505) & SL0902A SM: Device Tin Plated 17.5±12.5 Microns Construction Ceramic Insulator.

Product Marking	LF Logo, Voltage and date code
Glow to arc transition current	< 0.5Amps
Glow Voltage	140 Volts
Storage and Operational Temperature	-40 to +90

Voltage vs. Time Characteristic

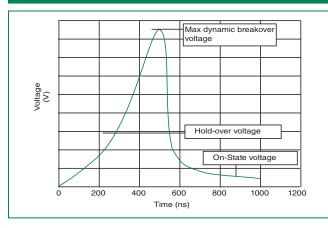


Typical Insertion Loss

@ 1.0 GHz = 0.01 dB
@ 1.4GHz = 0.1 dB
@ 1.8 GHz = 0.53 dB
@ 2.1 GHz = 0.81 dB
@ 2.45 GHz= 1 dB
@ 2.8 GHz = 1.2 dB
@ 3.1 GHz = 1.5 dB
@ 3.5 GHz = 2.1 dB




Device Dimensions


Outline 500 - CG5LS

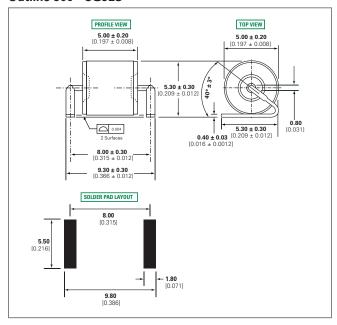


Outline 501 - CG5

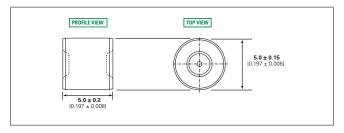


Outline 502 - CG5L-03, CG5L, CG5LTR, CG5600L-02

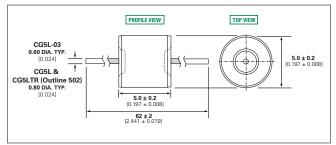

Outline 503 - CG5L-02 (except CG5600L-02, see Outline 502)

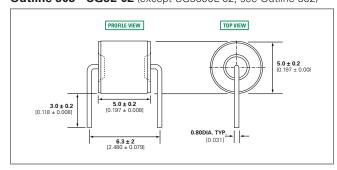

Outline 505 - CG5MS and SL0902A SM

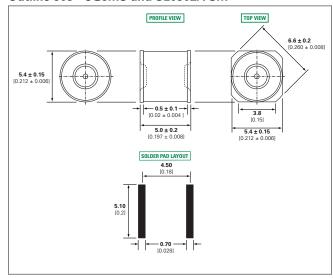


Gas Discharge Tube (GDT) Products CG5 and SL0902A Series



Soldering Parameters - Reflow Soldering (Surface Mount Devices)

Reflow Co	ndition	Pb – Free assembly	
	-Temperature Min (T _{s(min)})	150°C	
Pre Heat	-Temperature Max (T _{s(max)})	200°C	
	-Time (Min to Max) (t _s)	60 – 180 secs	
Average ra	amp up rate (Liquidus Temp k	3°C/second max	
T _{S(max)} to T _L	- Ramp-up Rate	5°C/second max	
Reflow	-Temperature (T _L) (Liquidus)	217°C	
	-Temperature (t _L)	60 - 150 seconds	
PeakTemp	perature (T _P)	260 ^{+0/-5} °C	
Time with Temperatu	in 5°C of actual peak ure (t _p)	10 – 30 seconds	
Ramp-dov	vn Rate	6°C/second max	
Time 25°C	to peakTemperature (T _P)	8 minutes Max.	
Do not exc	ceed	260°C	

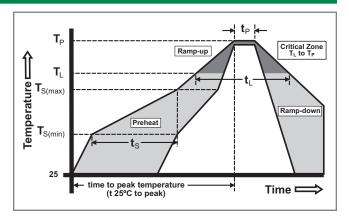


Soldering Parameters - Hand Soldering

Solder Iron Temperature: 350° C +/- 5°C

Heating Time: 5 seconds max.

Soldering Parameters - Wave Soldering (Thru-Hole Devices)

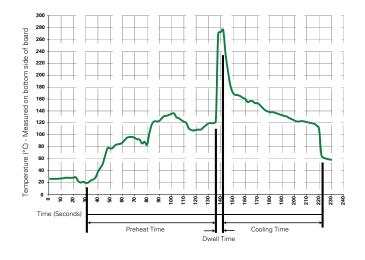

Recommended Process Parameters:


Wave Parameter	Lead-Free Recommendation		
Preheat:			
(Depends on Flux Activation Temperature)	(Typical Industry Recommendation)		
Temperature Minimum:	100° C		
Temperature Maximum:	150° C		
Preheat Time:	60-180 seconds		
Solder Pot Temperature:	280° C Maximum		
Solder DwellTime:	2-5 seconds		


Note: These devices are not recommended for IR or Convection Reflow process.

Gas Discharge Tube (GDT) Products CG5 and SL0902A Series


Packaging Dimensions


Core and 'MS' Type Items

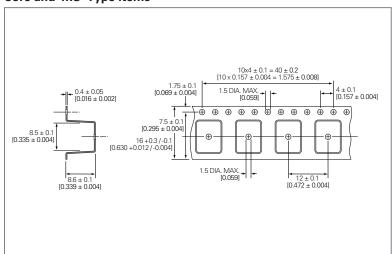

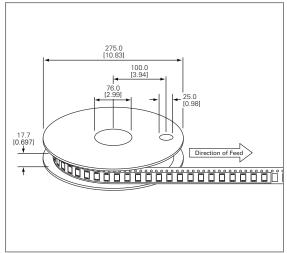

Part Numbering System and Ordering Information





Packaging

Device Type	Description
CG5LS (Outline 500), CG5MS (Outline 505), SL0902A SM	900pcs/reel in carrier and tape
CG5 core (Outline 501)	1000pcs/bag in bulk packaging
Axial Leaded CG5L-03, CG5L and CG5LTR (Outline 502)	1000pcs/reel in tape and reel
CG5L-02 (Outline 503)	50pcs/tray in tray and cover

^{*} For tape and reel specifications, please contact factory.

AMEYA360 Components Supply Platform

Authorized Distribution Brand:

























Website:

Welcome to visit www.ameya360.com

Contact Us:

> Address:

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd Minhang District, Shanghai , China

> Sales:

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

Customer Service :

Email service@ameya360.com

Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com