

Feature

- Low Power Consumption
- High Intensity
- I.C. compatible


Applications

- Commercial Outdoor Sign Board
- Front Panel Indicator
- Backlight

Description

- The (1)Red and (2)Green Chips are Matched For uniform Light Output
- Diffusion Lens

Package Dimension

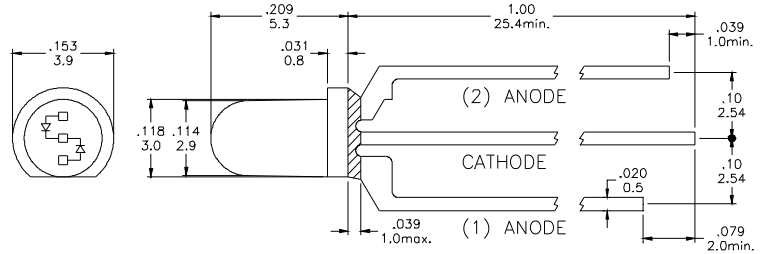

* Tolerance: $\frac{0.01}{0.25}$ Unit: $\frac{\text{inch}}{\text{mm}}$

Absolute Maximum Ratings at Ta=25°C

| Symbol | Parameter | Max. | Unit |
|--------|------------------------------------------|---------------|---------|
| PD | Power Dissipation | 100 | mW |
| VR | Reverse Voltage | 5 | V |
| IAF | Average Forward Current | 30 | mA |
| IPF | Peak Forward Current (Duty=0.1 , 1kHz) | 100 | mA |
| — | Derating Linear Form 25°C | 0.4 | mA / °C |
| Topr | Operating Temperature Range | - 40 to + 80 | °C |
| Tstg | Storage Temperature Range | - 40 to + 100 | °C |

Lead Soldering Temperature [1.6mm (0.063inch) From Body] 260°C For 5 Seconds.

Electrical / Optical Characteristics and Curves at Ta=25°C

| Symbol | Parameter | Test Condition | Min. | Typ. | Max. | Unit |
|--------|---------------------|----------------|------|------|------|------|
| VF | Forward Voltage | IF = 20 mA | R | 1.85 | 2.5 | V |
| | | | G | 2.2 | 2.8 | |
| IR | Reverse Current | VR = 5 V | | | 50 | μA |
| IV | Luminous Intensity | IF = 20 mA | R | 100 | | mcd. |
| | | | G | 80 | | |
| λ D | Dominant Wavelength | IF = 20 mA | R | 640 | | nm |
| | | | G | 570 | | |

Specific binning requirements- please contact our home office



AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com