

## NPN MEDIUM POWER MICROWAVE TRANSISTOR


### FEATURES

- **HIGH DYNAMIC RANGE**
- **LOW IM DISTORTION:** -40 dBc
- **HIGH OUTPUT POWER :** 27.5 dBm at TYP
- **LOW NOISE:** 1.5 dB TYP at 500 MHz
- **LOW COST**

### DESCRIPTION

The NE461 series of NPN silicon epitaxial bipolar transistors is designed for medium power applications requiring high dynamic range. This device exhibits an outstanding combination of high gain and low intermodulation distortion, as well as low noise figure. The NE461 series offers excellent performance and reliability at low cost through titanium, platinum, gold metallization system and direct nitride passivation of the surface of the chip. Devices are available in a low cost surface mount package (SOT-89) as well as in chip form.

NE46134  
TYPICAL OUTPUT POWER  
vs. INPUT POWER  
f = 1.0 GHz, I<sub>c</sub> = 100 mA

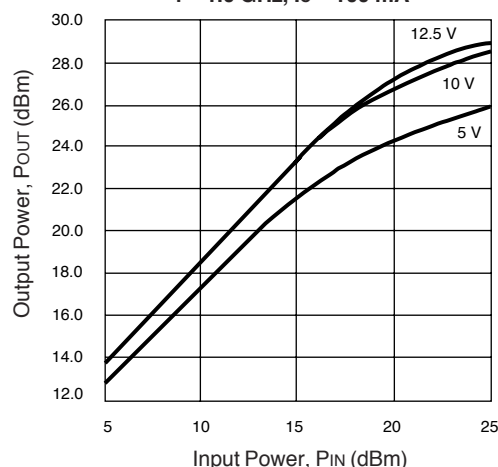

### ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25 °C)

| PART NUMBER<br>EIAJ <sup>1</sup> REGISTERED NUMBER<br>PACKAGE OUTLINE |                                                                                                                                                            |            | NE46100<br>00 (CHIP) |            |     | NE46134<br>2SC4536<br>34 |            |      |
|-----------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|----------------------|------------|-----|--------------------------|------------|------|
| SYMBOLS                                                               | PARAMETERS AND CONDITIONS                                                                                                                                  | UNITS      | MIN                  | TYP        | MAX | MIN                      | TYP        | MAX  |
| f <sub>T</sub>                                                        | Gain Bandwidth Product at V <sub>CE</sub> = 10 V, I <sub>c</sub> = 100 mA                                                                                  | GHz        |                      | 5.5        |     |                          | 5.5        |      |
| NF <sub>MIN</sub>                                                     | Minimum Noise Figure <sup>3</sup> at V <sub>CE</sub> = 10 V, I <sub>c</sub> = 50 mA, 500 MHz<br>V <sub>CE</sub> = 10 V, I <sub>c</sub> = 50 mA, 1 GHz      | dB<br>dB   |                      | 1.5<br>2.0 |     |                          | 1.5<br>2.0 |      |
| GL                                                                    | Linear Gain, V <sub>CE</sub> = 12.5 V, I <sub>c</sub> = 100 mA, 2.0 GHz<br>V <sub>CE</sub> = 12.5 V, I <sub>c</sub> = 100 mA, 1.0 GHz                      | dB<br>dB   |                      | 9.0        |     |                          | 8.0        |      |
| IS <sub>21EI</sub> <sup>2</sup>                                       | Insertion Power Gain at 10 V, 50 mA, f = 1.0 GHz                                                                                                           | dB         |                      | 10.0       |     | 5.5                      | 7.0        |      |
| h <sub>FE</sub>                                                       | DC Current Gain <sup>2</sup> at V <sub>CE</sub> = 10 V, I <sub>c</sub> = 50 mA                                                                             |            | 40                   |            | 200 | 40                       |            | 200  |
| I <sub>CBO</sub>                                                      | Collector Cutoff Current at V <sub>CB</sub> = 20 V, I <sub>E</sub> = 0 mA                                                                                  | A          |                      |            | 5.0 |                          |            | 5.0  |
| I <sub>EBO</sub>                                                      | Emitter Cutoff Current at V <sub>EB</sub> = 2 V, I <sub>C</sub> = 0 mA                                                                                     | A          |                      |            | 5.0 |                          |            | 5.0  |
| P <sub>1dB</sub>                                                      | Output Power at 1 dB Compression, V <sub>CE</sub> = 12.5 V, I <sub>c</sub> = 100 mA, 2.0 GHz<br>V <sub>CE</sub> = 12.5 V, I <sub>c</sub> = 100 mA, 1.0 GHz | dBm<br>dBm | 27.0                 |            |     |                          | 27.5       |      |
| IM <sub>3</sub>                                                       | Intermodulation Distortion, 10 V, 100 mA, F <sub>1</sub> = 1.0 GHz, F <sub>2</sub> = 0.99 GHz,<br>Total P <sub>OUT</sub> = 20 dBm                          | dBc        | -40.0                |            |     | -40.0                    |            |      |
| R <sub>TH</sub> (J-C)                                                 | Thermal Resistance (Junction to Case)                                                                                                                      | C/W        |                      |            | 30  |                          |            | 32.5 |
| R <sub>TH</sub> (J-A)                                                 | Thermal Resistance (Junction to Ambient)                                                                                                                   | C/W        |                      |            |     |                          | 312.5      |      |

Notes:

1. Electronic Industrial Association of Japan.
2. Pulsed: PW = 350 ms, Duty Cycle = 2%
3. RS = RL = 50 Ω untuned

ABSOLUTE MAXIMUM RATINGS<sup>1</sup> (T<sub>A</sub> = 25°C)

| SYMBOLS          | PARAMETERS                                                              | UNITS    | RATINGS                    |
|------------------|-------------------------------------------------------------------------|----------|----------------------------|
| V <sub>CBO</sub> | Collector to Base Voltage                                               | V        | 30                         |
| V <sub>CEO</sub> | Collector to Emitter Voltage                                            | V        | 15                         |
| V <sub>EBO</sub> | Emitter to Base Voltage                                                 | V        | 3                          |
| I <sub>C</sub>   | Collector Current                                                       | mA       | 250                        |
| P <sub>T</sub>   | Total Power Dissipation<br>NE46100 <sup>2</sup><br>NE46134 <sup>3</sup> | W<br>W   | 3.75<br>2.0                |
| T <sub>J</sub>   | Junction Temperature<br>NE46100<br>NE46134                              | °C<br>°C | 200<br>150                 |
| T <sub>STG</sub> | Storage Temperature<br>NE46100<br>NE46134                               | °C<br>°C | -65 to +200<br>-65 to +150 |

- Notes:
1. Operation in excess of any one of these parameters may result in permanent damage.
  2. Chip mounted on an infinite heat sink (see AN-1001 for handling instructions).
  3. Packaged device mounted on 0.7 mm x 2.5 cm<sup>2</sup> double sided ceramic substrate (copper plating).


TYPICAL PERFORMANCE CURVES (T<sub>A</sub>=25°C)

NE46134


TYPICAL NOISE PARAMETERS (T<sub>A</sub> = 25°C)

| FREQ.<br>(GHz)                                 | NF <sub>OPT</sub><br>(dB) | G <sub>A</sub><br>(dB) | Γ <sub>OPT</sub> |      | RN/50 |
|------------------------------------------------|---------------------------|------------------------|------------------|------|-------|
|                                                |                           |                        | MAG              | ANG  |       |
| V <sub>CC</sub> = 10 V, I <sub>C</sub> = 50 mA |                           |                        |                  |      |       |
| 0.5                                            | 1.5                       | 13.5                   | 0.34             | -176 | 0.09  |


NE46134  
INSERTION POWER GAIN AND MAXIMUM AVAILABLE GAIN vs. COLLECTOR CURRENT  
V<sub>CE</sub> = 10 V, f = 1 GHz

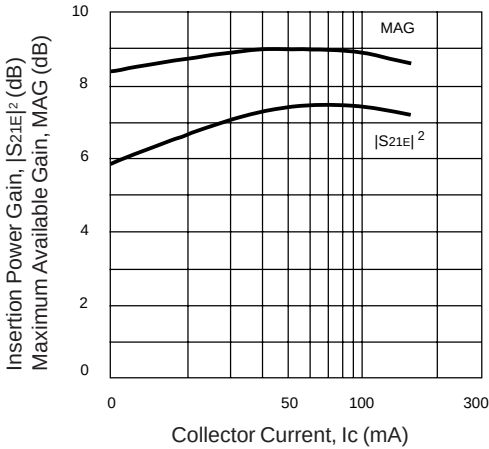


NE46100, NE46134  
TOTAL POWER DISSIPATION vs. AMBIENT TEMPERATURE

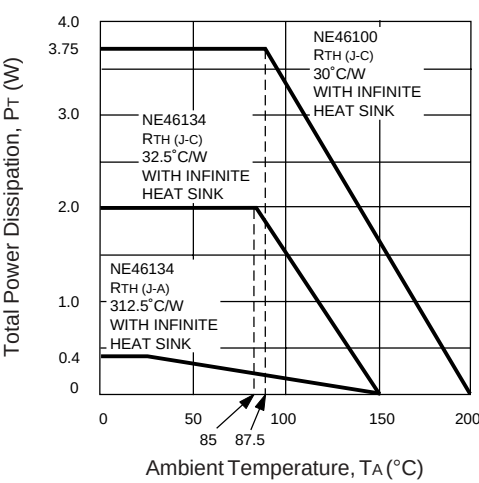

NE46100, NE46134  
COLLECTOR CURRENT vs. COLLECTOR TO EMITTER VOLTAGE

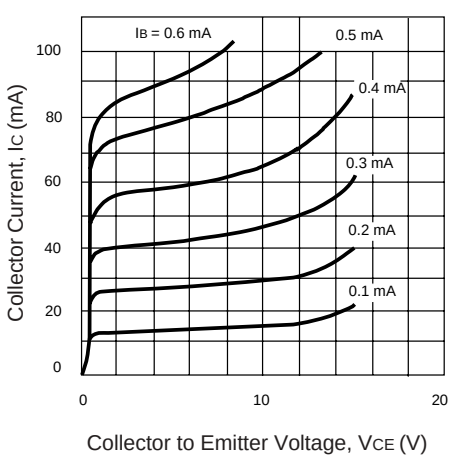


NE46100, NE46134  
NOISE FIGURE vs. COLLECTOR CURRENT  
V<sub>CE</sub> = 10 V, f = 1 GHz

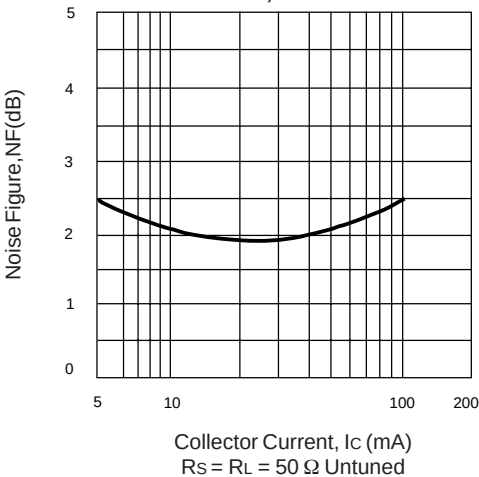


TYPICAL PERFORMANCE CURVES ( $T_A = 25^\circ\text{C}$ )


NE46100, NE46134  
GAIN BANDWIDTH PRODUCT vs. COLLECTOR CURRENT  
 $V_{CE} = 10\text{ V}$

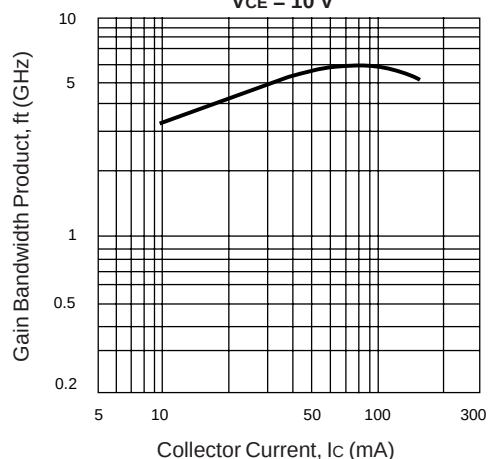


NE46134  
3RD ORDER INTERMODULATION DISTORTION,  
2ND ORDER INTERMODULATION DISTORTION  
(+ AND -) vs. COLLECTOR CURRENT

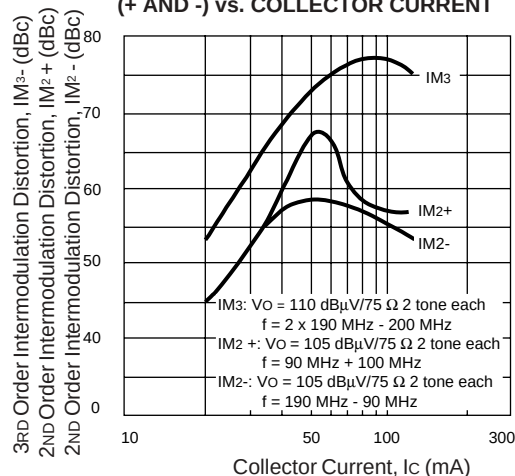


NE46134  
TYPICAL OUTPUT  
POWER/INTERMODULATION  
DISTORTION vs. INPUT POWER  
 $f = 1.0\text{ GHz}$ ,  $V_{CE} = 10\text{ V}$ ,  $I_C = 100\text{ mA}$   
2 Tone Test  $F_1 = 1.0\text{ GHz}$ ,  $F_2 = 0.99\text{ GHz}$

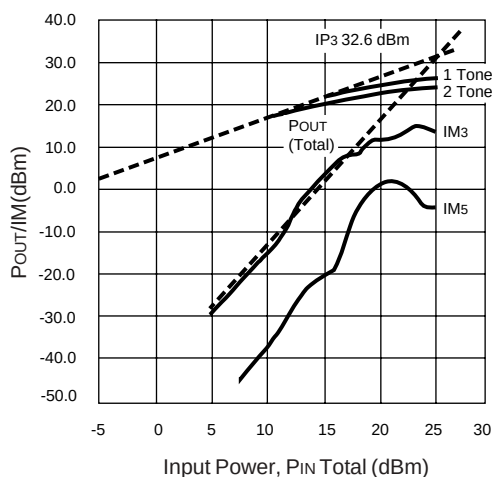

NE46134  
TYPICAL OUTPUT  
POWER/INTERMODULATION  
DISTORTION vs. INPUT POWER  
 $f = 1.0\text{ GHz}$ ,  $V_{CE} = 5\text{ V}$ ,  $I_C = 100\text{ mA}$   
2 Tone Test  $F_1 = 1.0\text{ GHz}$ ,  $F_2 = 0.99\text{ GHz}$

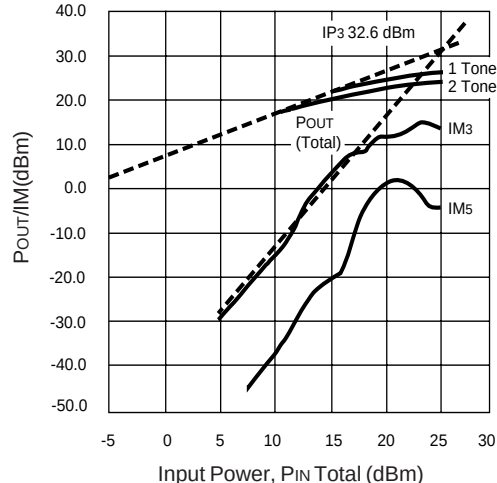


NE46100, NE46134  
INTERMODULATION DISTORTION  
vs. COLLECTOR CURRENT  
 $f = 1.0\text{ GHz}$ ,  $V_{CE} = 10\text{ V}$


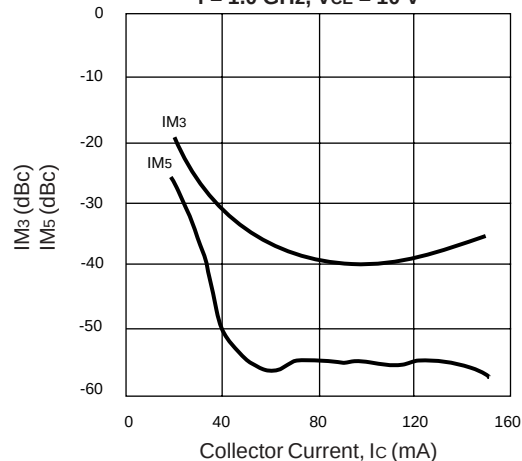


2 Tone Test  
Total  $P_{IN} = 12.1\text{ dBm}$   
 $F_1 = 1.0\text{ GHz}$ ,  $F_2 = 0.99\text{ GHz}$

NE46100, NE46134  
INTERMODULATION DISTORTION vs.  
COLLECTOR CURRENT  
 $f = 1.0\text{ GHz}$ ,  $V_{CE} = 5\text{ V}$

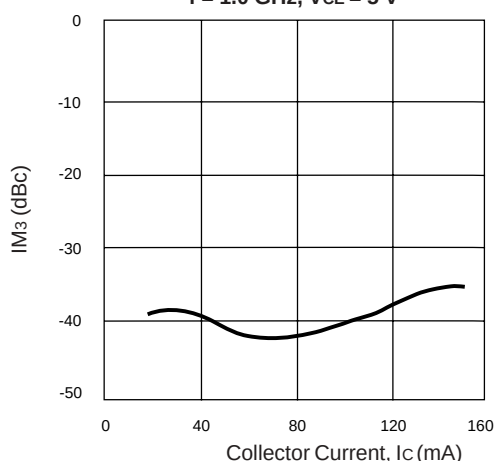

Total  $P_{IN} = 6.0\text{ dBm}$   
 $F_1 = 1.0\text{ GHz}$ ,  $F_2 = 0.99\text{ GHz}$   
Note:  $IM_5$  > than 58 dB down from carrier for measured currents greater than 40 mA.

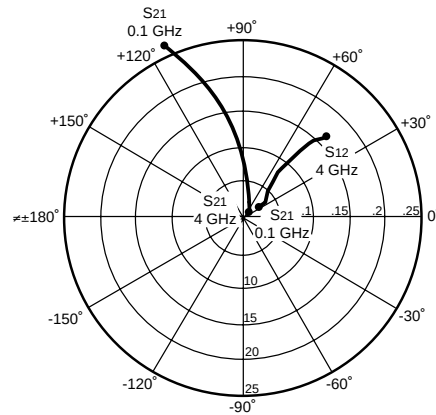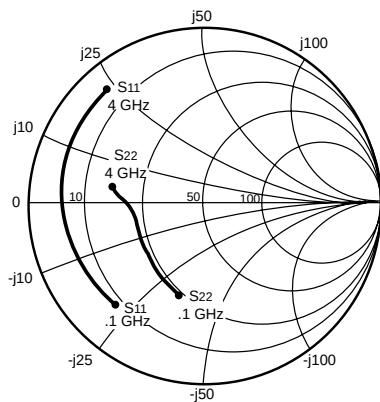TYPICAL COMMON EMITTER SCATTERING PARAMETERS<sup>1</sup> (T<sub>A</sub> = 25°C)

Coordinates in Ohms  
Frequency in GHz  
VCE = 5 V, IC = 50 mA

## NE46100

VCE = 5 V, IC = 50 mA

| FREQUENCY<br>(MHz) | S11   |      | S21    |     | S12   |     | S22   |      | K    | MAG <sup>2</sup><br>(dB) |
|--------------------|-------|------|--------|-----|-------|-----|-------|------|------|--------------------------|
|                    | MAG   | ANG  | MAG    | ANG | MAG   | ANG | MAG   | ANG  |      |                          |
| 100                | 0.778 | -137 | 26.776 | 114 | 0.028 | 30  | 0.555 | -102 | 0.16 | 29.8                     |
| 200                | 0.815 | -159 | 14.407 | 100 | 0.035 | 29  | 0.434 | -135 | 0.36 | 26.2                     |
| 500                | 0.826 | -177 | 5.855  | 84  | 0.040 | 38  | 0.400 | -162 | 0.75 | 21.7                     |
| 800                | 0.827 | 176  | 3.682  | 76  | 0.052 | 43  | 0.402 | -169 | 0.91 | 18.5                     |
| 1000               | 0.826 | 173  | 2.963  | 71  | 0.058 | 47  | 0.405 | -172 | 1.02 | 16.3                     |
| 1200               | 0.825 | 170  | 2.441  | 66  | 0.064 | 47  | 0.412 | -174 | 1.08 | 14.0                     |
| 1400               | 0.820 | 167  | 2.111  | 61  | 0.069 | 47  | 0.413 | -176 | 1.17 | 12.4                     |
| 1600               | 0.828 | 165  | 1.863  | 57  | 0.078 | 54  | 0.426 | -177 | 1.15 | 11.4                     |
| 1800               | 0.827 | 162  | 1.671  | 53  | 0.087 | 50  | 0.432 | -178 | 1.14 | 10.6                     |
| 2000               | 0.828 | 159  | 1.484  | 49  | 0.093 | 50  | 0.431 | -180 | 1.17 | 9.5                      |
| 2500               | 0.822 | 153  | 1.218  | 39  | 0.11  | 48  | 0.462 | 177  | 1.18 | 7.8                      |
| 3000               | 0.818 | 148  | 1.010  | 30  | 0.135 | 46  | 0.490 | 174  | 1.16 | 6.3                      |
| 3500               | 0.824 | 142  | 0.876  | 21  | 0.147 | 44  | 0.507 | 170  | 1.16 | 5.3                      |
| 4000               | 0.812 | 137  | 0.762  | 13  | 0.168 | 38  | 0.535 | 167  | 1.14 | 4.3                      |

## VCE = 5 V, IC = 100 mA

|      |       |      |        |     |       |    |       |      |      |      |
|------|-------|------|--------|-----|-------|----|-------|------|------|------|
| 100  | 0.778 | -144 | 27.669 | 111 | 0.027 | 35 | 0.523 | -114 | 0.27 | 30.2 |
| 200  | 0.820 | -164 | 14.559 | 97  | 0.029 | 29 | 0.445 | -144 | 0.42 | 27.0 |
| 500  | 0.832 | -179 | 5.885  | 84  | 0.035 | 38 | 0.435 | -166 | 0.81 | 22.2 |
| 800  | 0.833 | 175  | 3.691  | 76  | 0.048 | 45 | 0.435 | -173 | 0.95 | 18.8 |
| 1000 | 0.831 | 172  | 2.980  | 71  | 0.056 | 51 | 0.437 | -176 | 1.05 | 16.0 |
| 1200 | 0.836 | 169  | 2.464  | 67  | 0.061 | 52 | 0.432 | -178 | 1.11 | 14.0 |
| 1400 | 0.829 | 166  | 2.121  | 61  | 0.072 | 53 | 0.447 | -180 | 1.12 | 12.6 |
| 1600 | 0.831 | 164  | 1.867  | 58  | 0.080 | 54 | 0.445 | 179  | 1.14 | 11.4 |
| 1800 | 0.827 | 161  | 1.671  | 54  | 0.090 | 53 | 0.460 | 178  | 1.14 | 10.4 |
| 2000 | 0.830 | 159  | 1.499  | 49  | 0.096 | 52 | 0.456 | 176  | 1.15 | 9.6  |
| 2500 | 0.831 | 153  | 1.228  | 40  | 0.115 | 51 | 0.479 | 173  | 1.15 | 8.0  |
| 3000 | 0.821 | 147  | 1.018  | 31  | 0.134 | 48 | 0.504 | 170  | 1.18 | 6.3  |
| 3500 | 0.820 | 142  | 0.881  | 23  | 0.155 | 42 | 0.516 | 167  | 1.14 | 5.3  |
| 4000 | 0.812 | 136  | 0.779  | 14  | 0.170 | 41 | 0.543 | 164  | 1.16 | 4.2  |

## Notes:

## 1. S-Parameters include Bond wires.

Base: Total 1 wire, 1 per Bond Pad, 0.0259" (658 μm) long each wire.

Collector: Total 1 wire, 1 per Bond Pad, 0.0182" (463 μm) long each wire.

Emitter: Total 2 wires, 1 per side, 0.0224" (569 μm) long each wire.


Wire: 0.0007" (17.8 μm) dia., gold.

## 2. Gain Calculations:


$$\text{MAG} = \frac{|S_{21}|}{|S_{12}|} \left( K \pm \sqrt{K^2 - 1} \right). \text{ When } K \leq 1, \text{ MAG is undefined and MSG values are used. } \text{MSG} = \frac{|S_{21}|}{|S_{12}|}, K = \frac{1 + |\Delta|^2 - |S_{11}|^2 - |S_{22}|^2}{2 |S_{12} S_{21}|}, \Delta = S_{11} S_{22} - S_{21} S_{12}$$

MAG = Maximum Available Gain

MSG = Maximum Stable Gain

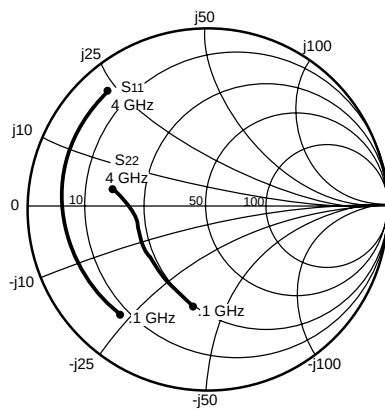TYPICAL COMMON EMITTER SCATTERING PARAMETERS<sup>1</sup> ( $T_A = 25^\circ\text{C}$ )

Coordinates in Ohms  
Frequency in GHz  
 $V_{CE} = 8\text{ V}$ ,  $I_C = 50\text{ mA}$

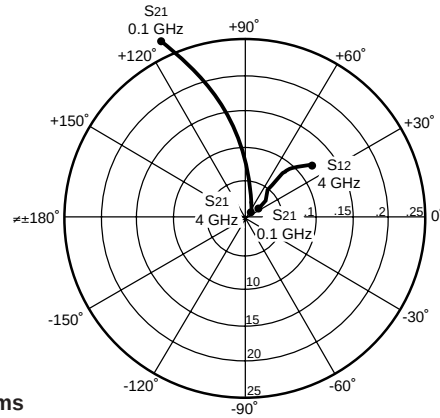

## NE46100

 $V_{CE} = 8\text{ V}$ ,  $I_C = 50\text{ mA}$ 

| FREQUENCY<br>(MHz) | S <sub>11</sub> |      | S <sub>21</sub> |     | S <sub>12</sub> |     | S <sub>22</sub> |      | K    | MAG <sup>2</sup><br>(dB) |
|--------------------|-----------------|------|-----------------|-----|-----------------|-----|-----------------|------|------|--------------------------|
|                    | MAG             | ANG  | MAG             | ANG | MAG             | ANG | MAG             | ANG  |      |                          |
| 100                | 0.773           | -133 | 27.779          | 115 | 0.031           | 30  | 0.538           | -99  | 0.20 | 29.5                     |
| 200                | 0.808           | -157 | 15.007          | 100 | 0.033           | 30  | 0.428           | -132 | 0.36 | 26.6                     |
| 500                | 0.824           | -176 | 6.118           | 85  | 0.041           | 35  | 0.388           | -160 | 0.70 | 21.8                     |
| 800                | 0.823           | 177  | 3.841           | 76  | 0.050           | 42  | 0.388           | -168 | 0.91 | 18.8                     |
| 1000               | 0.822           | 173  | 3.095           | 71  | 0.060           | 50  | 0.388           | -171 | 0.99 | 17.2                     |
| 1200               | 0.824           | 170  | 2.570           | 67  | 0.065           | 48  | 0.389           | -173 | 1.05 | 14.6                     |
| 1400               | 0.820           | 167  | 2.201           | 61  | 0.075           | 46  | 0.395           | -175 | 1.06 | 13.2                     |
| 1600               | 0.825           | 165  | 1.937           | 57  | 0.080           | 49  | 0.410           | -176 | 1.09 | 12.0                     |
| 1800               | 0.822           | 162  | 1.747           | 53  | 0.084           | 48  | 0.416           | -177 | 1.15 | 10.9                     |
| 2000               | 0.821           | 160  | 1.551           | 49  | 0.095           | 50  | 0.421           | -179 | 1.15 | 9.8                      |
| 2500               | 0.816           | 154  | 1.267           | 39  | 0.116           | 50  | 0.449           | 177  | 1.16 | 8.0                      |
| 3000               | 0.817           | 148  | 1.051           | 30  | 0.128           | 45  | 0.474           | 175  | 1.17 | 6.7                      |
| 3500               | 0.817           | 143  | 0.910           | 22  | 0.154           | 45  | 0.496           | 171  | 1.12 | 5.6                      |
| 4000               | 0.807           | 137  | 0.800           | 13  | 0.169           | 40  | 0.527           | 168  | 1.13 | 4.6                      |

 $V_{CE} = 8\text{ V}$ ,  $I_C = 100\text{ mA}$ 

|      |       |      |        |     |       |    |       |      |      |      |
|------|-------|------|--------|-----|-------|----|-------|------|------|------|
| 100  | 0.771 | -141 | 28.901 | 111 | 0.025 | 27 | 0.507 | -109 | 0.23 | 30.6 |
| 200  | 0.816 | -162 | 15.323 | 98  | 0.028 | 23 | 0.434 | -142 | 0.38 | 27.4 |
| 500  | 0.823 | -177 | 6.183  | 84  | 0.038 | 36 | 0.417 | -165 | 0.76 | 22.1 |
| 800  | 0.822 | 176  | 3.889  | 76  | 0.047 | 48 | 0.419 | -172 | 1.01 | 18.7 |
| 1000 | 0.824 | 172  | 3.124  | 71  | 0.057 | 49 | 0.418 | -175 | 1.02 | 16.5 |
| 1200 | 0.822 | 169  | 2.605  | 67  | 0.064 | 54 | 0.422 | -177 | 1.09 | 14.2 |
| 1400 | 0.816 | 166  | 2.223  | 62  | 0.073 | 56 | 0.426 | -178 | 1.15 | 12.5 |
| 1600 | 0.821 | 164  | 1.962  | 58  | 0.079 | 54 | 0.435 | 180  | 1.15 | 11.6 |
| 1800 | 0.823 | 161  | 1.751  | 54  | 0.088 | 54 | 0.443 | 179  | 1.14 | 10.7 |
| 2000 | 0.823 | 159  | 1.563  | 50  | 0.097 | 55 | 0.438 | 177  | 1.17 | 9.6  |
| 2500 | 0.816 | 153  | 1.292  | 40  | 0.117 | 51 | 0.462 | 174  | 1.16 | 8.0  |
| 3000 | 0.814 | 148  | 1.061  | 31  | 0.134 | 48 | 0.491 | 171  | 1.18 | 6.5  |
| 3500 | 0.820 | 142  | 0.927  | 23  | 0.154 | 45 | 0.501 | 168  | 1.12 | 5.7  |
| 4000 | 0.807 | 137  | 0.814  | 15  | 0.170 | 41 | 0.529 | 165  | 1.15 | 4.4  |

 $V_{CE} = 10\text{ V}$ ,  $I_C = 50\text{ mA}$ 

|      |       |      |        |     |       |    |       |      |      |      |
|------|-------|------|--------|-----|-------|----|-------|------|------|------|
| 100  | 0.780 | -132 | 28.079 | 115 | 0.029 | 46 | 0.548 | -99  | 0.21 | 29.8 |
| 200  | 0.809 | -156 | 15.218 | 100 | 0.033 | 29 | 0.425 | -131 | 0.34 | 26.7 |
| 500  | 0.819 | -175 | 6.206  | 85  | 0.041 | 34 | 0.387 | -159 | 0.70 | 21.8 |
| 800  | 0.817 | 177  | 3.888  | 76  | 0.048 | 42 | 0.386 | -168 | 0.96 | 19.4 |
| 1000 | 0.821 | 174  | 3.136  | 71  | 0.060 | 48 | 0.385 | -170 | 0.97 | 17.2 |
| 1200 | 0.821 | 171  | 2.596  | 67  | 0.063 | 47 | 0.388 | -173 | 1.07 | 14.5 |
| 1400 | 0.814 | 168  | 2.236  | 62  | 0.068 | 53 | 0.394 | -174 | 1.19 | 12.6 |
| 1600 | 0.819 | 165  | 1.976  | 58  | 0.075 | 50 | 0.401 | -176 | 1.17 | 11.7 |
| 1800 | 0.816 | 162  | 1.769  | 53  | 0.084 | 51 | 0.413 | -178 | 1.17 | 10.7 |
| 2000 | 0.819 | 160  | 1.565  | 49  | 0.094 | 49 | 0.416 | -179 | 1.15 | 9.8  |
| 2500 | 0.815 | 154  | 1.290  | 39  | 0.116 | 51 | 0.439 | 178  | 1.14 | 8.2  |
| 3000 | 0.814 | 148  | 1.072  | 30  | 0.128 | 46 | 0.468 | 175  | 1.18 | 6.7  |
| 3500 | 0.819 | 143  | 0.920  | 22  | 0.150 | 44 | 0.488 | 173  | 1.12 | 5.8  |
| 4000 | 0.806 | 137  | 0.803  | 13  | 0.168 | 40 | 0.519 | 168  | 1.14 | 4.5  |

See notes on previous page.

TYPICAL COMMON EMITTER SCATTERING PARAMETERS<sup>1</sup> (T<sub>A</sub> = 25°C)

## NE46100

V<sub>CE</sub> = 10 V, I<sub>C</sub> = 100 mA

| FREQUENCY<br>(MHz) | S <sub>11</sub> |      | S <sub>21</sub> |     | S <sub>12</sub> |     | S <sub>22</sub> |      | K    | MAG <sup>2</sup><br>(dB) |
|--------------------|-----------------|------|-----------------|-----|-----------------|-----|-----------------|------|------|--------------------------|
|                    | MAG             | ANG  | MAG             | ANG | MAG             | ANG | MAG             | ANG  |      |                          |
| 100                | 0.791           | -139 | 29.278          | 112 | 0.027           | 30  | 0.508           | -109 | 0.22 | 30.4                     |
| 200                | 0.809           | -161 | 15.503          | 98  | 0.027           | 32  | 0.433           | -140 | 0.43 | 27.5                     |
| 500                | 0.822           | -177 | 6.280           | 84  | 0.037           | 43  | 0.414           | -165 | 0.81 | 22.3                     |
| 800                | 0.815           | 176  | 3.939           | 76  | 0.046           | 48  | 0.408           | -171 | 1.02 | 18.5                     |
| 1000               | 0.819           | 173  | 3.176           | 71  | 0.055           | 50  | 0.411           | -174 | 1.05 | 16.2                     |
| 1200               | 0.818           | 170  | 2.621           | 67  | 0.064           | 54  | 0.412           | -176 | 1.11 | 14.1                     |
| 1400               | 0.814           | 167  | 2.255           | 62  | 0.070           | 52  | 0.418           | -178 | 1.16 | 12.7                     |
| 1600               | 0.821           | 164  | 1.990           | 58  | 0.078           | 52  | 0.430           | -180 | 1.14 | 11.8                     |
| 1800               | 0.823           | 161  | 1.786           | 54  | 0.090           | 53  | 0.434           | 179  | 1.11 | 11.0                     |
| 2000               | 0.819           | 159  | 1.585           | 50  | 0.097           | 52  | 0.429           | 177  | 1.15 | 9.8                      |
| 2500               | 0.816           | 153  | 1.304           | 40  | 0.113           | 51  | 0.458           | 174  | 1.18 | 8.1                      |
| 3000               | 0.812           | 148  | 1.085           | 31  | 0.139           | 47  | 0.484           | 171  | 1.13 | 6.7                      |
| 3500               | 0.813           | 142  | 0.937           | 23  | 0.153           | 45  | 0.501           | 168  | 1.14 | 5.6                      |
| 4000               | 0.802           | 137  | 0.824           | 15  | 0.168           | 42  | 0.520           | 165  | 1.18 | 4.3                      |

V<sub>CE</sub> = 12.5 V, I<sub>C</sub> = 50 mA

|      |       |      |        |     |       |    |       |      |      |      |
|------|-------|------|--------|-----|-------|----|-------|------|------|------|
| 100  | 0.759 | -129 | 28.230 | 116 | 0.032 | 30 | 0.543 | -96  | 0.21 | 29.5 |
| 200  | 0.806 | -155 | 15.378 | 101 | 0.035 | 31 | 0.420 | -130 | 0.35 | 26.4 |
| 500  | 0.815 | -175 | 6.261  | 85  | 0.041 | 34 | 0.380 | -159 | 0.71 | 21.9 |
| 800  | 0.813 | 178  | 3.926  | 76  | 0.052 | 44 | 0.379 | -167 | 0.91 | 18.8 |
| 1000 | 0.814 | 174  | 3.179  | 71  | 0.058 | 45 | 0.375 | -171 | 1.00 | 17.1 |
| 1200 | 0.816 | 171  | 2.629  | 67  | 0.067 | 47 | 0.382 | -172 | 1.03 | 14.8 |
| 1400 | 0.810 | 168  | 2.266  | 62  | 0.071 | 46 | 0.385 | -174 | 1.12 | 12.9 |
| 1600 | 0.817 | 165  | 1.993  | 58  | 0.079 | 47 | 0.400 | -175 | 1.11 | 12.0 |
| 1800 | 0.816 | 163  | 1.770  | 53  | 0.087 | 49 | 0.408 | -176 | 1.13 | 10.9 |
| 2000 | 0.817 | 160  | 1.592  | 49  | 0.090 | 51 | 0.408 | -178 | 1.20 | 9.8  |
| 2500 | 0.811 | 154  | 1.301  | 40  | 0.109 | 50 | 0.441 | 179  | 1.20 | 8.0  |
| 3000 | 0.809 | 149  | 1.084  | 30  | 0.131 | 46 | 0.459 | 176  | 1.17 | 6.7  |
| 3500 | 0.811 | 143  | 0.934  | 22  | 0.150 | 45 | 0.482 | 172  | 1.15 | 5.6  |
| 4000 | 0.803 | 137  | 0.816  | 13  | 0.166 | 42 | 0.514 | 169  | 1.17 | 4.4  |

V<sub>CE</sub> = 12.5 V, I<sub>C</sub> = 100 mA

|      |       |      |        |     |       |    |       |      |      |      |
|------|-------|------|--------|-----|-------|----|-------|------|------|------|
| 100  | 0.785 | -138 | 29.375 | 112 | 0.027 | 25 | 0.510 | -109 | 0.21 | 30.4 |
| 200  | 0.804 | -160 | 15.593 | 98  | 0.030 | 32 | 0.421 | -140 | 0.43 | 27.1 |
| 500  | 0.814 | -177 | 6.318  | 84  | 0.040 | 42 | 0.401 | -164 | 0.78 | 22.0 |
| 800  | 0.809 | 176  | 3.951  | 76  | 0.048 | 48 | 0.398 | -171 | 1.02 | 18.3 |
| 1000 | 0.815 | 173  | 3.193  | 71  | 0.057 | 52 | 0.400 | -174 | 1.05 | 16.1 |
| 1200 | 0.813 | 170  | 2.656  | 67  | 0.060 | 53 | 0.403 | -177 | 1.17 | 14.0 |
| 1400 | 0.811 | 167  | 2.264  | 62  | 0.073 | 51 | 0.411 | -178 | 1.13 | 12.7 |
| 1600 | 0.818 | 164  | 1.997  | 58  | 0.076 | 55 | 0.416 | -180 | 1.19 | 11.6 |
| 1800 | 0.814 | 162  | 1.797  | 54  | 0.090 | 54 | 0.421 | 180  | 1.14 | 10.7 |
| 2000 | 0.813 | 160  | 1.613  | 49  | 0.094 | 50 | 0.424 | 178  | 1.18 | 9.8  |
| 2500 | 0.805 | 154  | 1.316  | 40  | 0.113 | 52 | 0.442 | 175  | 1.22 | 7.9  |
| 3000 | 0.813 | 148  | 1.091  | 31  | 0.133 | 46 | 0.470 | 172  | 1.15 | 6.7  |
| 3500 | 0.807 | 142  | 0.948  | 23  | 0.156 | 45 | 0.481 | 169  | 1.15 | 5.5  |
| 4000 | 0.802 | 137  | 0.826  | 14  | 0.164 | 40 | 0.510 | 166  | 1.19 | 4.4  |

## Notes:

## 1. S-Parameters include Bond wires.

Base: Total 1 wire, 1 per Bond Pad, 0.0259" (658 μm) long each wire.

Collector: Total 1 wire, 1 per Bond Pad, 0.0182" (463 μm) long each wire.

Emitter: Total 2 wires, 1 per side, 0.0224" (569 μm) long each wire.


Wire: 0.0007" (17.8 μm) dia., gold.

## 2. Gain Calculations:


$$\text{MAG} = \frac{|S_{21}|}{|S_{12}|} \left( K \pm \sqrt{K^2 - 1} \right). \text{ When } K \leq 1, \text{ MAG is undefined and MSG values are used. } \text{MSG} = \frac{|S_{21}|}{|S_{12}|}, K = \frac{1 + |\Delta|^2 - |S_{11}|^2 - |S_{22}|^2}{2 |S_{12} S_{21}|}, \Delta = S_{11} S_{22} - S_{21} S_{12}$$

MAG = Maximum Available Gain

MSG = Maximum Stable Gain

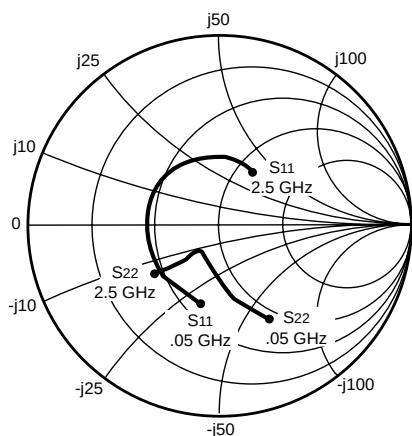TYPICAL COMMON EMITTER SCATTERING PARAMETERS (T<sub>A</sub> = 25°C)

Coordinates in Ohms  
Frequency in GHz  
V<sub>CE</sub> = 5 V, I<sub>C</sub> = 50 mA

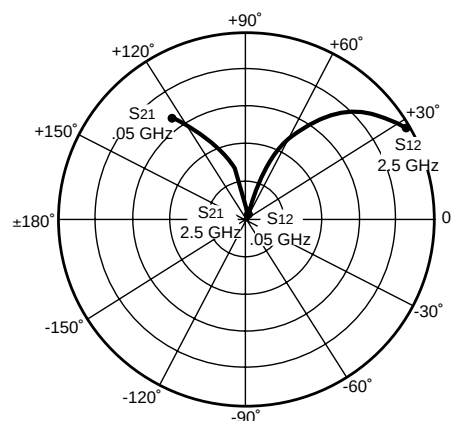

## NE46134

V<sub>CE</sub> = 5 V, I<sub>C</sub> = 50 mA

| FREQUENCY<br>(GHz) | S <sub>11</sub> |        | S <sub>21</sub> |       | S <sub>12</sub> |      | S <sub>22</sub> |        | K    | MAG <sup>2</sup><br>(dB) |
|--------------------|-----------------|--------|-----------------|-------|-----------------|------|-----------------|--------|------|--------------------------|
|                    | MAG             | ANG    | MAG             | ANG   | MAG             | ANG  | MAG             | ANG    |      |                          |
| 0.05               | 0.425           | -99.7  | 32.606          | 124.1 | 0.026           | 62.0 | 0.578           | -62.5  | 0.50 | 30.9                     |
| 0.10               | 0.412           | -136.7 | 18.679          | 105.2 | 0.037           | 62.5 | 0.358           | -86.9  | 0.74 | 27.1                     |
| 0.20               | 0.393           | -166.1 | 9.787           | 91.7  | 0.060           | 64.4 | 0.230           | -109.0 | 0.95 | 22.2                     |
| 0.40               | 0.385           | 171.3  | 4.993           | 78.6  | 0.107           | 67.5 | 0.186           | -126.9 | 1.05 | 15.3                     |
| 0.60               | 0.387           | 156.0  | 3.382           | 69.5  | 0.154           | 65.9 | 0.188           | -133.0 | 1.07 | 11.7                     |
| 0.80               | 0.392           | 143.7  | 2.587           | 61.2  | 0.201           | 62.7 | 0.202           | -135.1 | 1.08 | 9.4                      |
| 1.00               | 0.392           | 133.1  | 2.123           | 53.7  | 0.245           | 58.8 | 0.221           | -136.0 | 1.07 | 7.8                      |
| 1.20               | 0.397           | 122.5  | 1.822           | 46.5  | 0.288           | 54.5 | 0.244           | -136.4 | 1.06 | 6.5                      |
| 1.40               | 0.391           | 113.1  | 1.620           | 39.8  | 0.327           | 50.1 | 0.271           | -136.9 | 1.05 | 5.6                      |
| 1.60               | 0.382           | 103.9  | 1.449           | 33.6  | 0.363           | 45.6 | 0.300           | -137.3 | 1.05 | 4.7                      |
| 1.80               | 0.375           | 95.6   | 1.325           | 28.4  | 0.394           | 41.8 | 0.328           | -139.0 | 1.04 | 4.0                      |
| 2.00               | 0.372           | 85.9   | 1.239           | 23.2  | 0.428           | 37.6 | 0.352           | -139.7 | 1.03 | 3.5                      |
| 2.20               | 0.359           | 76.6   | 1.161           | 17.8  | 0.456           | 33.3 | 0.378           | -140.3 | 1.03 | 3.0                      |
| 2.40               | 0.348           | 67.0   | 1.100           | 13.3  | 0.482           | 29.2 | 0.400           | -141.1 | 1.02 | 2.6                      |
| 2.50               | 0.340           | 61.9   | 1.075           | 11.2  | 0.494           | 27.3 | 0.411           | -141.4 | 1.02 | 2.4                      |

V<sub>CE</sub> = 5 V, I<sub>C</sub> = 100 mA

| FREQUENCY<br>(GHz) | S <sub>11</sub> |        | S <sub>21</sub> |       | S <sub>12</sub> |      | S <sub>22</sub> |        | K    | MAG <sup>2</sup><br>(dB) |
|--------------------|-----------------|--------|-----------------|-------|-----------------|------|-----------------|--------|------|--------------------------|
|                    | MAG             | ANG    | MAG             | ANG   | MAG             | ANG  | MAG             | ANG    |      |                          |
| 0.05               | 0.388           | -112.1 | 34.051          | 120.8 | 0.022           | 64.0 | 0.523           | -69.6  | 0.59 | 31.9                     |
| 0.10               | 0.394           | -146.4 | 18.931          | 103.0 | 0.035           | 65.0 | 0.324           | -95.6  | 0.82 | 27.3                     |
| 0.20               | 0.381           | 171.4  | 9.827           | 90.6  | 0.060           | 68.3 | 0.221           | -119.6 | 0.98 | 22.1                     |
| 0.40               | 0.384           | 168.4  | 5.002           | 78.2  | 0.111           | 69.5 | 0.189           | -137.1 | 1.05 | 15.2                     |
| 0.60               | 0.384           | 153.8  | 3.389           | 69.4  | 0.161           | 67.0 | 0.192           | -142.3 | 1.07 | 11.6                     |
| 0.80               | 0.389           | 141.8  | 2.595           | 61.3  | 0.209           | 63.1 | 0.203           | -143.6 | 1.07 | 9.3                      |
| 1.00               | 0.388           | 131.1  | 2.135           | 54.0  | 0.256           | 58.8 | 0.219           | -143.5 | 1.06 | 7.7                      |
| 1.20               | 0.389           | 120.2  | 1.833           | 46.9  | 0.300           | 54.2 | 0.239           | -142.9 | 1.05 | 6.4                      |
| 1.40               | 0.383           | 110.8  | 1.634           | 40.3  | 0.341           | 49.5 | 0.263           | -142.4 | 1.04 | 5.5                      |
| 1.60               | 0.373           | 101.1  | 1.464           | 33.9  | 0.377           | 44.8 | 0.290           | -141.9 | 1.04 | 4.6                      |
| 1.80               | 0.364           | 92.8   | 1.340           | 28.7  | 0.409           | 40.8 | 0.316           | -142.9 | 1.04 | 3.9                      |
| 2.00               | 0.359           | 82.9   | 1.257           | 23.5  | 0.443           | 36.4 | 0.338           | -143.0 | 1.03 | 3.4                      |
| 2.20               | 0.346           | 73.2   | 1.180           | 18.1  | 0.471           | 32.0 | 0.362           | -143.1 | 1.03 | 3.0                      |
| 2.40               | 0.334           | 63.2   | 1.121           | 13.4  | 0.497           | 27.7 | 0.384           | -143.3 | 1.03 | 2.6                      |
| 2.50               | 0.327           | 57.8   | 1.092           | 11.4  | 0.508           | 25.7 | 0.394           | -143.4 | 1.03 | 2.3                      |

V<sub>CE</sub> = 8 V, I<sub>C</sub> = 50 mA

| FREQUENCY<br>(GHz) | S <sub>11</sub> |        | S <sub>21</sub> |       | S <sub>12</sub> |      | S <sub>22</sub> |        | K    | MAG <sup>2</sup><br>(dB) |
|--------------------|-----------------|--------|-----------------|-------|-----------------|------|-----------------|--------|------|--------------------------|
|                    | MAG             | ANG    | MAG             | ANG   | MAG             | ANG  | MAG             | ANG    |      |                          |
| 0.05               | 0.439           | -95.9  | 33.732          | 125.2 | 0.024           | 61.2 | 0.594           | -58.7  | 0.48 | 31.4                     |
| 0.10               | 0.397           | -133.0 | 19.510          | 106.0 | 0.036           | 62.2 | 0.363           | -81.0  | 0.74 | 27.4                     |
| 0.20               | 0.368           | -162.9 | 10.263          | 92.2  | 0.058           | 65.1 | 0.227           | -100.6 | 0.95 | 22.5                     |
| 0.40               | 0.364           | 172.4  | 5.239           | 79.1  | 0.103           | 68.1 | 0.176           | -117.2 | 1.05 | 15.7                     |
| 0.60               | 0.363           | 156.6  | 3.545           | 70.0  | 0.150           | 66.3 | 0.178           | -123.5 | 1.07 | 12.1                     |
| 0.80               | 0.369           | 143.8  | 2.706           | 61.7  | 0.195           | 63.1 | 0.193           | -126.3 | 1.07 | 9.8                      |
| 1.00               | 0.368           | 132.9  | 2.216           | 54.3  | 0.238           | 59.3 | 0.215           | -128.0 | 1.07 | 8.1                      |
| 1.20               | 0.375           | 121.7  | 1.896           | 46.9  | 0.279           | 55.1 | 0.241           | -129.2 | 1.06 | 6.8                      |
| 1.40               | 0.371           | 112.8  | 1.681           | 40.3  | 0.319           | 50.8 | 0.270           | -130.5 | 1.05 | 5.9                      |
| 1.60               | 0.365           | 103.2  | 1.499           | 34.0  | 0.353           | 46.3 | 0.302           | -131.7 | 1.04 | 5.0                      |
| 1.80               | 0.360           | 94.9   | 1.368           | 28.9  | 0.384           | 42.6 | 0.331           | -133.9 | 1.04 | 4.3                      |
| 2.00               | 0.357           | 85.1   | 1.274           | 23.7  | 0.417           | 38.4 | 0.358           | -135.1 | 1.03 | 3.8                      |
| 2.20               | 0.345           | 75.4   | 1.191           | 18.1  | 0.445           | 34.2 | 0.385           | -136.2 | 1.03 | 3.3                      |
| 2.40               | 0.335           | 65.8   | 1.126           | 13.6  | 0.470           | 30.2 | 0.409           | -137.3 | 1.02 | 2.9                      |
| 2.50               | 0.331           | 60.7   | 1.094           | 11.7  | 0.482           | 28.3 | 0.421           | -137.8 | 1.02 | 2.7                      |

See notes on previous page.

TYPICAL COMMON EMITTER SCATTERING PARAMETERS (T<sub>A</sub> = 25°C)

## NE46134

VCE = 8 V, Ic = 100 mA

| FREQUENCY | S <sub>11</sub> |        | S <sub>21</sub> |       | S <sub>12</sub> |      | S <sub>22</sub> |        | K    | MAG <sup>2</sup> |
|-----------|-----------------|--------|-----------------|-------|-----------------|------|-----------------|--------|------|------------------|
| (GHz)     | MAG             | ANG    | MAG             | ANG   | MAG             | ANG  | MAG             | ANG    |      | (dB)             |
| 0.05      | 0.366           | -103.2 | 35.884          | 122.0 | 0.022           | 60.3 | 0.533           | -65.3  | 0.59 | 32.2             |
| 0.10      | 0.374           | -141.4 | 20.121          | 103.8 | 0.033           | 64.0 | 0.329           | -89.2  | 0.81 | 27.8             |
| 0.20      | 0.361           | -168.7 | 10.486          | 91.2  | 0.058           | 68.5 | 0.214           | -110.9 | 0.97 | 22.6             |
| 0.40      | 0.358           | 169.1  | 5.335           | 78.8  | 0.106           | 69.7 | 0.175           | -128.0 | 1.05 | 15.7             |
| 0.60      | 0.363           | 154.2  | 3.610           | 70.1  | 0.154           | 67.3 | 0.179           | -133.6 | 1.06 | 12.2             |
| 0.80      | 0.368           | 141.6  | 2.755           | 62.0  | 0.200           | 63.6 | 0.193           | -135.3 | 1.07 | 9.8              |
| 1.00      | 0.369           | 130.7  | 2.257           | 54.7  | 0.245           | 59.4 | 0.211           | -135.8 | 1.06 | 8.1              |
| 1.20      | 0.372           | 120.0  | 1.933           | 47.8  | 0.287           | 55.0 | 0.235           | -135.9 | 1.05 | 6.9              |
| 1.40      | 0.366           | 110.4  | 1.713           | 41.1  | 0.327           | 50.4 | 0.262           | -136.1 | 1.04 | 5.9              |
| 1.60      | 0.359           | 100.9  | 1.532           | 34.8  | 0.362           | 45.8 | 0.291           | -136.3 | 1.04 | 5.0              |
| 1.80      | 0.353           | 92.4   | 1.397           | 29.7  | 0.393           | 41.9 | 0.319           | -137.9 | 1.04 | 4.3              |
| 2.00      | 0.350           | 82.8   | 1.305           | 24.4  | 0.426           | 37.6 | 0.344           | -138.5 | 1.03 | 3.8              |
| 2.20      | 0.339           | 73.3   | 1.220           | 19.0  | 0.453           | 33.3 | 0.370           | -139.0 | 1.03 | 3.3              |
| 2.40      | 0.329           | 63.5   | 1.153           | 14.4  | 0.478           | 29.2 | 0.393           | -139.7 | 1.02 | 2.9              |
| 2.50      | 0.324           | 58.2   | 1.120           | 12.3  | 0.490           | 27.2 | 0.403           | -140.0 | 1.03 | 2.6              |

VCE = 10 V, Ic = 50 mA

|      |       |        |        |       |       |      |       |        |      |      |
|------|-------|--------|--------|-------|-------|------|-------|--------|------|------|
| 0.50 | 0.416 | -90.3  | 34.060 | 125.4 | 0.025 | 60.6 | 0.589 | -58.0  | 0.52 | 31.4 |
| 0.10 | 0.393 | -132.0 | 19.738 | 106.2 | 0.035 | 60.6 | 0.365 | -79.9  | 0.74 | 27.5 |
| 0.20 | 0.361 | -162.4 | 10.390 | 92.3  | 0.057 | 65.0 | 0.226 | -99.1  | 0.95 | 22.6 |
| 0.40 | 0.356 | 172.5  | 5.308  | 79.2  | 0.103 | 68.1 | 0.174 | -115.3 | 1.05 | 15.8 |
| 0.60 | 0.356 | 156.9  | 3.589  | 70.1  | 0.149 | 66.3 | 0.176 | -121.7 | 1.07 | 12.2 |
| 0.80 | 0.362 | 143.8  | 2.738  | 61.8  | 0.194 | 63.1 | 0.192 | -124.7 | 1.07 | 9.9  |
| 1.00 | 0.365 | 132.9  | 2.241  | 54.4  | 0.237 | 59.3 | 0.213 | -126.4 | 1.07 | 8.2  |
| 1.20 | 0.369 | 121.8  | 1.915  | 47.2  | 0.278 | 55.2 | 0.240 | -127.8 | 1.06 | 6.9  |
| 1.40 | 0.363 | 112.5  | 1.698  | 40.5  | 0.317 | 50.9 | 0.269 | -129.3 | 1.05 | 6.0  |
| 1.60 | 0.356 | 102.9  | 1.514  | 34.2  | 0.351 | 46.4 | 0.302 | -130.5 | 1.05 | 5.0  |
| 1.80 | 0.354 | 94.7   | 1.380  | 29.0  | 0.382 | 42.7 | 0.332 | -132.9 | 1.04 | 4.3  |
| 2.00 | 0.352 | 85.1   | 1.284  | 23.7  | 0.415 | 38.5 | 0.358 | -134.2 | 1.03 | 3.9  |
| 2.20 | 0.341 | 75.1   | 1.200  | 18.3  | 0.442 | 34.4 | 0.386 | -135.3 | 1.03 | 3.4  |
| 2.40 | 0.331 | 65.6   | 1.133  | 13.8  | 0.468 | 30.3 | 0.411 | -136.5 | 1.02 | 3.0  |
| 2.50 | 0.324 | 60.5   | 1.101  | 11.8  | 0.479 | 28.4 | 0.422 | -137.0 | 1.02 | 2.7  |

VCE = 10 V, Ic = 100 mA

|      |       |        |        |       |       |      |       |        |      |      |
|------|-------|--------|--------|-------|-------|------|-------|--------|------|------|
| 0.05 | 0.377 | -101.0 | 36.164 | 122.1 | 0.022 | 66.4 | 0.536 | -63.9  | 0.58 | 32.2 |
| 0.10 | 0.358 | -139.9 | 20.301 | 103.9 | 0.034 | 66.5 | 0.327 | -87.1  | 0.82 | 27.8 |
| 0.20 | 0.345 | -167.5 | 10.586 | 91.2  | 0.058 | 68.1 | 0.209 | -108.1 | 0.97 | 22.6 |
| 0.40 | 0.342 | 169.7  | 5.386  | 78.8  | 0.107 | 69.8 | 0.169 | -125.0 | 1.05 | 15.7 |
| 0.60 | 0.349 | 154.1  | 3.646  | 70.1  | 0.155 | 67.3 | 0.173 | -130.6 | 1.06 | 12.2 |
| 0.80 | 0.350 | 141.2  | 2.782  | 62.0  | 0.202 | 63.5 | 0.187 | -132.5 | 1.06 | 9.8  |
| 1.00 | 0.351 | 130.1  | 2.278  | 54.8  | 0.247 | 59.3 | 0.206 | -133.1 | 1.06 | 8.1  |
| 1.20 | 0.356 | 119.1  | 1.952  | 47.6  | 0.289 | 54.8 | 0.230 | -133.3 | 1.05 | 6.9  |
| 1.40 | 0.350 | 109.5  | 1.729  | 41.0  | 0.329 | 50.2 | 0.258 | -133.7 | 1.04 | 5.9  |
| 1.60 | 0.342 | 100.0  | 1.543  | 34.8  | 0.364 | 45.7 | 0.289 | -134.1 | 1.04 | 5.0  |
| 1.80 | 0.337 | 91.1   | 1.409  | 29.6  | 0.395 | 41.6 | 0.318 | -136.0 | 1.04 | 4.3  |
| 2.00 | 0.333 | 80.8   | 1.316  | 24.4  | 0.428 | 37.3 | 0.343 | -136.6 | 1.03 | 3.8  |
| 2.20 | 0.323 | 70.8   | 1.229  | 18.8  | 0.455 | 33.0 | 0.370 | -137.3 | 1.03 | 3.3  |
| 2.40 | 0.312 | 60.8   | 1.163  | 14.4  | 0.481 | 28.9 | 0.394 | -138.1 | 1.02 | 2.9  |
| 2.50 | 0.308 | 55.2   | 1.132  | 12.2  | 0.492 | 26.9 | 0.406 | -138.5 | 1.02 | 2.7  |

## Notes:

- The NE46134 was measured with the package mounted on a 0.030" thick RT Duroid 5880 substrate.  
To avoid exceeding T<sub>J</sub> MAX when using poor thermal conducting substrates, use of a heat sink is recommended. For example:  
The Thermalloy 7100D series heat sink or thermal equivalent may be suitable. The above S parameters were measured without heat sink.
- Gain Calculations:



$$MAG = \frac{|S_{21}|}{|S_{12}|} \left( K \pm \sqrt{K^2 - 1} \right). \text{ When } K \leq 1, \text{ MAG is undefined and MSG values are used. } MSG = \frac{|S_{21}|}{|S_{12}|}, K = \frac{1 + |\Delta|^2 - |S_{11}|^2 - |S_{22}|^2}{2 |S_{12}|^2}, \Delta = S_{11} S_{22} - S_{21} S_{12}$$

MAG = Maximum Available Gain

MSG = Maximum Stable Gain



# TYPICAL COMMON EMITTER SCATTERING PARAMETERS (T<sub>A</sub> = 25°C)

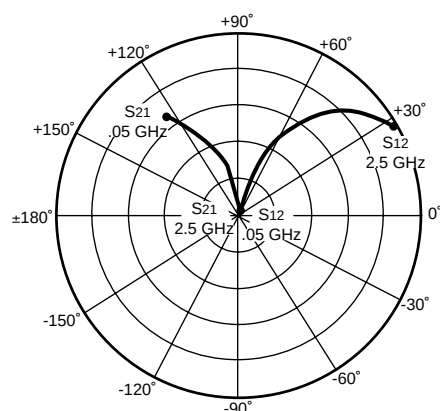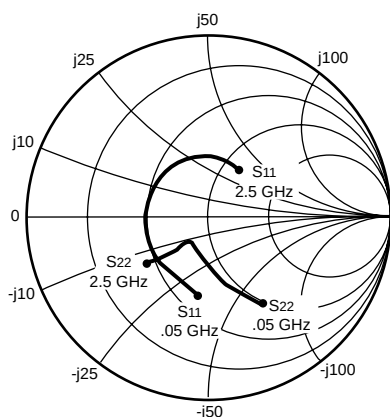

Coordinates in Ohms  
Frequency in GHz  
V<sub>CE</sub> = 12.5 V, I<sub>C</sub> = 50 mA

## NE46134

V<sub>CE</sub> = 12.5 V, I<sub>C</sub> = 50 mA


| FREQUENCY<br>(GHz) | S <sub>11</sub> |        | S <sub>21</sub> |       | S <sub>12</sub> |      | S <sub>22</sub> |        | K    | MAG <sup>2</sup><br>(dB) |
|--------------------|-----------------|--------|-----------------|-------|-----------------|------|-----------------|--------|------|--------------------------|
|                    | MAG             | ANG    | MAG             | ANG   | MAG             | ANG  | MAG             | ANG    |      |                          |
| 0.05               | 0.432           | -91.9  | 34.139          | 125.6 | 0.024           | 63.0 | 0.586           | -56.7  | 0.50 | 31.5                     |
| 0.10               | 0.372           | -129.4 | 19.834          | 106.3 | 0.036           | 63.5 | 0.362           | -78.4  | 0.75 | 27.4                     |
| 0.20               | 0.348           | -161.2 | 10.443          | 92.4  | 0.058           | 65.4 | 0.223           | -97.1  | 0.95 | 22.6                     |
| 0.40               | 0.343           | 173.5  | 5.332           | 79.3  | 0.104           | 68.1 | 0.170           | -112.8 | 1.05 | 15.8                     |
| 0.60               | 0.343           | 157.1  | 3.610           | 70.1  | 0.150           | 66.3 | 0.172           | -119.3 | 1.07 | 12.2                     |
| 0.80               | 0.349           | 143.8  | 2.755           | 61.8  | 0.196           | 63.1 | 0.188           | -122.4 | 1.07 | 9.9                      |
| 1.00               | 0.352           | 132.4  | 2.254           | 54.4  | 0.239           | 59.2 | 0.210           | -124.2 | 1.07 | 8.2                      |
| 1.20               | 0.353           | 121.2  | 1.927           | 47.1  | 0.280           | 55.0 | 0.236           | -125.8 | 1.06 | 6.9                      |
| 1.40               | 0.350           | 111.6  | 1.710           | 40.4  | 0.320           | 50.7 | 0.267           | -127.4 | 1.05 | 6.0                      |
| 1.60               | 0.343           | 101.9  | 1.523           | 34.0  | 0.354           | 46.2 | 0.300           | -128.9 | 1.04 | 5.0                      |
| 1.80               | 0.339           | 93.1   | 1.388           | 29.0  | 0.385           | 42.4 | 0.330           | -131.5 | 1.04 | 4.3                      |
| 2.00               | 0.336           | 83.3   | 1.295           | 23.5  | 0.418           | 38.2 | 0.357           | -132.7 | 1.03 | 3.9                      |
| 2.20               | 0.325           | 73.3   | 1.206           | 18.1  | 0.445           | 34.0 | 0.386           | -134.0 | 1.03 | 3.3                      |
| 2.40               | 0.318           | 63.0   | 1.140           | 13.6  | 0.471           | 29.9 | 0.411           | -135.3 | 1.02 | 3.0                      |
| 2.50               | 0.314           | 57.3   | 1.109           | 11.7  | 0.482           | 28.0 | 0.423           | -135.9 | 1.02 | 2.7                      |

V<sub>CE</sub> = 12.5 V, I<sub>C</sub> = 100 mA

|      |       |        |        |       |       |      |       |        |      |      |
|------|-------|--------|--------|-------|-------|------|-------|--------|------|------|
| 0.05 | 0.380 | -100.0 | 36.475 | 122.4 | 0.021 | 64.3 | 0.530 | -62.6  | 0.59 | 32.4 |
| 0.10 | 0.355 | -137.9 | 20.531 | 104.1 | 0.033 | 65.0 | 0.324 | -86.1  | 0.82 | 27.9 |
| 0.20 | 0.341 | -167.1 | 10.702 | 91.3  | 0.058 | 68.3 | 0.208 | -106.6 | 0.97 | 22.7 |
| 0.40 | 0.338 | 170.0  | 5.446  | 79.0  | 0.106 | 69.6 | 0.167 | -123.6 | 1.05 | 15.8 |
| 0.60 | 0.339 | 154.4  | 3.684  | 70.2  | 0.154 | 67.2 | 0.170 | -129.1 | 1.06 | 12.3 |
| 0.80 | 0.344 | 141.3  | 2.812  | 62.1  | 0.201 | 63.5 | 0.185 | -131.1 | 1.06 | 9.9  |
| 1.00 | 0.346 | 130.1  | 2.302  | 54.9  | 0.246 | 59.3 | 0.204 | -131.7 | 1.06 | 8.2  |
| 1.20 | 0.349 | 119.2  | 1.971  | 47.8  | 0.288 | 54.9 | 0.229 | -132.1 | 1.05 | 7.0  |
| 1.40 | 0.345 | 109.4  | 1.748  | 41.2  | 0.327 | 50.3 | 0.257 | -132.7 | 1.04 | 6.0  |
| 1.60 | 0.336 | 99.7   | 1.557  | 34.9  | 0.362 | 45.7 | 0.288 | -133.1 | 1.04 | 5.1  |
| 1.80 | 0.330 | 91.1   | 1.420  | 29.7  | 0.393 | 41.7 | 0.317 | -135.0 | 1.04 | 4.3  |
| 2.00 | 0.328 | 80.3   | 1.324  | 24.6  | 0.426 | 37.4 | 0.343 | -135.8 | 1.03 | 3.8  |
| 2.20 | 0.320 | 70.4   | 1.240  | 19.0  | 0.453 | 33.1 | 0.370 | -136.5 | 1.03 | 3.4  |
| 2.40 | 0.309 | 60.2   | 1.170  | 14.4  | 0.478 | 29.0 | 0.395 | -137.3 | 1.02 | 2.9  |
| 2.50 | 0.305 | 54.5   | 1.140  | 12.2  | 0.489 | 27.0 | 0.406 | -137.8 | 1.02 | 2.7  |



See notes on previous page

OUTLINE DIMENSIONS

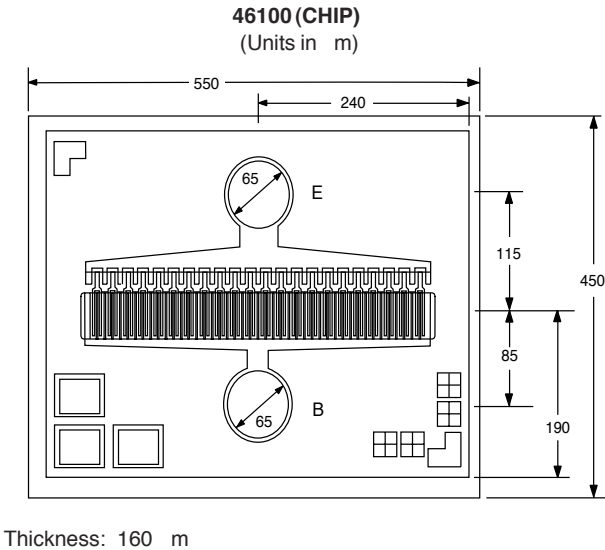

ORDERING INFORMATION

| PART NUMBER | QUANTITY | PACKAGING   |
|-------------|----------|-------------|
| NE46100     | 100      | Waffle Pack |
| NE46134-T1  | 1000     | Tape & Reel |

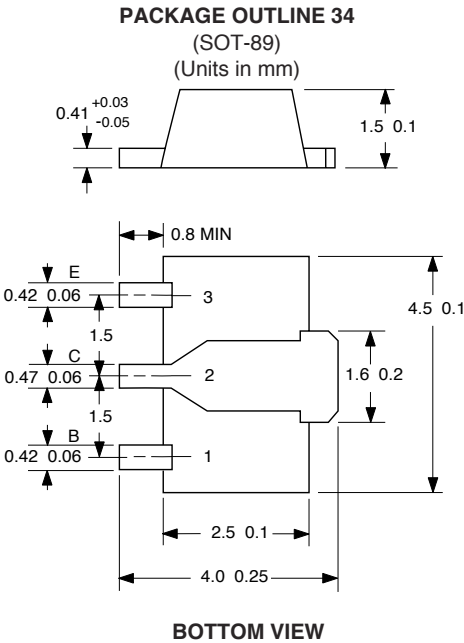

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct     +86 (21) 6401-6692  
  
Email       amall@ameya360.com  
  
QQ         800077892  
  
Skype       ameyasales1 ameyasales2

➤ Customer Service :

Email       service@ameya360.com

➤ Partnership :

Tel         +86 (21) 64016692-8333  
  
Email       mkt@ameya360.com