

ARES-5423

Programmable Embedded Controller with Intel® Atom™ D2550 Platform



Features

- **Less Cable, Fanless Design**
- Rich I/O on the Panel with 6 x COM, DIO, 4 x USB.
- LED Indicator on the Panel with Power/HDD/COM/DIO
- CFast Socket, Outside Accessible
- Support Din-Rail Mounting
- Rugged Design for Shock/Vibration Protection
- Easy Installation/Maintenance

System

CPU	Soldered onboard Intel® Atom™ D2550 1.86GHz processor
Memory	Soldered onboard 2GB DDR3 SDRAM
Chipset	Intel® NM10
Graphics	Integrated Intel® GMA3650
ATA	1 x Serial ATA port at 300MB/s HDD transfer rate
LAN Chipset	2 x Realtek 8111 GbE controllers
Watchdog Timer	1~255 levels reset

I/O

Serial Port	2 x RS-232 ports, all are 1x10-pin terminal block 4 x RS-232/485 selectable ports, all are 2x10-pin terminal block
USB Port	4 x USB 2.0 ports
LAN	2 x RJ-45 ports
Video Port	1 x DB-15 female connector for Analog RGB
Selectable Port	1 x 8-bit digital I/O, 4 in/4 out, all are 1x10-pin terminal block
LED Indicator	PW/HDD/COM/DIO
Expansion Bus	1 x Mini-card slot interconnected with SIM card socket for optional WiFi or HSUPA module

Environmental

Operating Temp.	-10 ~ 55°C (14 ~ 131°F), ambient w/ air flow
Storage Temp.	-40 ~ 80°C (-40 ~ 176°F)
Operating Humidity	10 ~ 95% @ 55°C (non-condensing)
Vibration	5~500Hz, 3 Grms Random
Shock	Operating 40G (11ms), Non-operating 80G with CF/SSD

Qualification

Certification	CE, FCC Class A
----------------------	-----------------

Power Requirement

Power Input	DC 9~36V input (w/ 2-pin DC input terminal block)
Power Consumption	25W

Storage

Type	1 x 2.5" drive bay for HDD/SSD 1 x CFast socket, outside accessible
-------------	--

Mechanical

Construction	Whole Aluminum chassis
Mounting	Din rail mounting
Weight	1.7 kg (3.74 lb) (Barebone)
Dimensions (W x D x H)	170 x 127 x 70 mm (6.69" x 4.9" x 2.7")

OS Support


Windows XP Embedded / Windows XP Professional / Windows Embedded 7 Professional / Windows Embedded 7 Standard

Ordering Information

ARES-5423	Barebone system w/ Atom™ D2550 CPU, 2GB DRAM, CFast
------------------	---



Dimensions

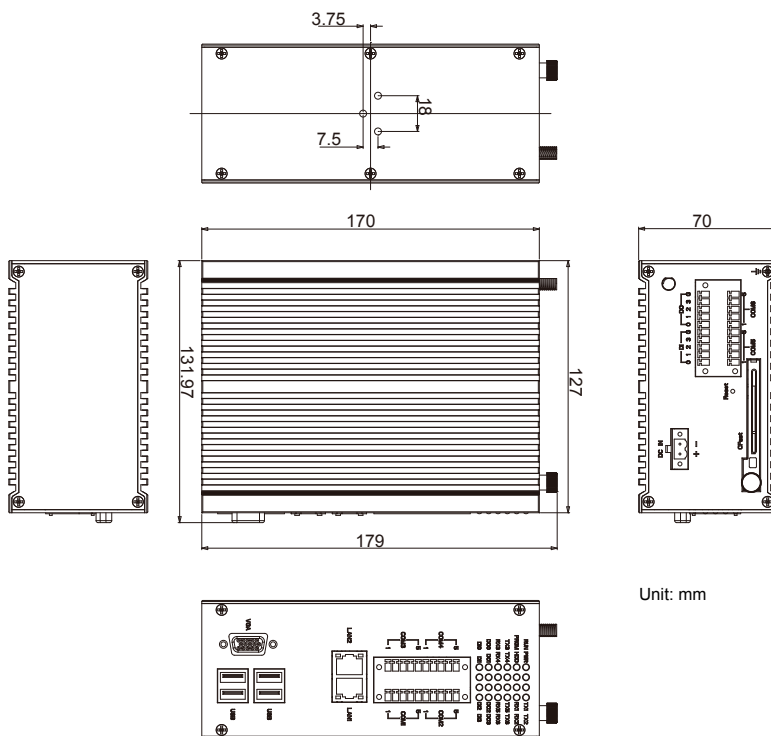

Optional Accessories

PAC-B065W-1

19V/3.4A 65W AC/DC adapter kit



Optional Configuration (CTOS* Kit)

SSD-25040

Intel® 2.5" 40GB SATAII SSD kit



HSPA-SI1400

HSUPA 3.75G module kit & internal wiring



WIFI-IN1300

Intel® Centrino® Advanced-N 6205 WiFi module w/ 20cm internal wiring



ANT-D11

1 x WiFi Dual-band 2.4G/5G antenna



ANT-H11

1 x 2dBi HSUPA antenna



*CTOS means Configure-to-Order Service.

» Example of ARES-5423 mounted on DIN rail



AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com