
REV. Status ISSUE 1

04/08/96 TS

- A. Electrical Specifications (@25°C)
 - 1. Rated Voltage; 250 V AC 50/60 Hz 2. Rated Current; 2A AC

 - 3. Common Mode Inductance (@ 1 KHz); 2 mH MIN

 - 4. DC Resistance; (each winding) 0.15 Ω MAX 6. Insulation Resistance; 100 M Ω MIN at 500 VDC Winding to Winding, Winding to Core
 - 7. HiPot test; AC 2.0 KV 1 minute Winding to Winding, Winding to Core

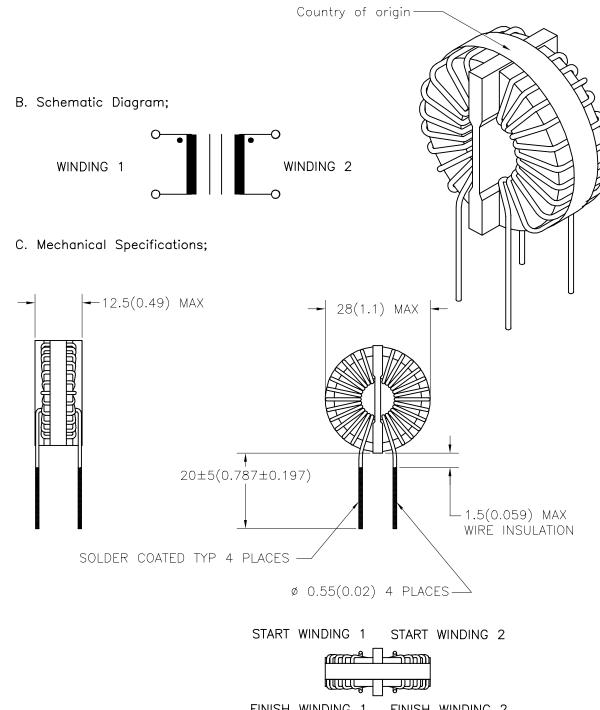

PREPARED BY:

FINISH WINDING 1 FINISH WINDING 2

K. Brennan						
ENGINEER: T. Shiozawa	P-A4-11620	EV -	COIL COMMON MODE	СМ	IT-01	202
QUALITY CONTROL: D. Kellev	ICONTENTS OF THIS DRAWING	ARE TA	WURA CORPORATION OF AMERICA 352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624 (909) 699-1270 FAX 9096769482	MODE DIM: mm(In)	SCL: 1/1	SH: 1 OF 1
M. Ona	PROPRIETARY NOTICE: THIS DRAWII RETAINS THE EXCLUSIVE RIGHT OF	NG PRINT DISSEMII	T OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEF NATION, REPRODUCTION, MANUFACTURE AND SALE. THIS RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER I	REIN ARE PROPI DRAWING, PRIN	T OR DOCUMEN	T IS SUBMITTED IN

AMEYA360 Components Supply Platform

Authorized Distribution Brand:

























Website:

Welcome to visit www.ameya360.com

Contact Us:

Address:

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd Minhang District, Shanghai , China

> Sales:

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

Customer Service :

Email service@ameya360.com

Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com