

337 **0%**
MERCURY

SR416SW

Watch Battery OEM

Technical Data Sheet


Specifications

Chemical system	Zinc / Monovalent Silver Oxide, low drain
Nominal Voltage	1,55 V
Capacity	8 mAh, Discharge over 56,2 k Ω at 23 $\pm$ 3°C to 1,2 V
Operating Temperature*	-10°C – 60°C
Self Discharge	Less than 7% per year at 23 $\pm$ 3°C
Weight	~0,13 g

Dimensions


(according IEC 60086-3)

Diameter	4,80 mm (0,189")
Height	1,65 mm (0,065")

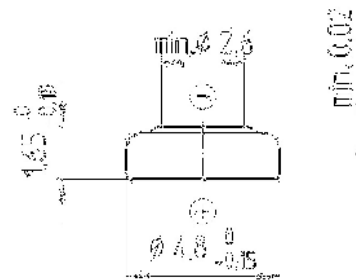

Discharge Curve

Constant Load	56,2 k Ω
Starting Drain	27,8 μ A
Temperature	23 $\pm$ 3°C

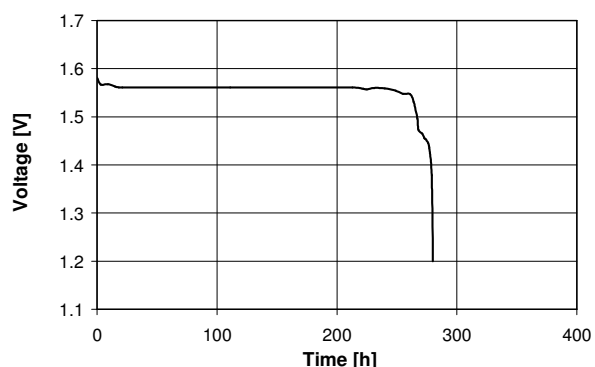

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the PSDS document related to that product or product family.

**Condensing humidity not allowed*

Rev. 337MF_OEM.05 2014/10

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com