



ETA-USA

The Power Professionals

AOFD-240

240W Din Rail Mount



FEATURES:

Universal AC input 90~264 VAC and 127~370 VDC
Flexible Din Rail Mount
Industrial Temp Range -25 ~ +70°C range
Rugged Design
Warranty: 3 years
Installation on DIN rail 30mm only
PFC as standard (180W-240W)
Over voltage protection
Over current protection
LED Indicator for DC power ON
LED Indicator for DC low



	MODEL/CHANNEL	Unit	AOFD-240-24	AOFD-240-48					
OUTPUT	Norminal Voltage	[V]	24	48	-	-			
	Setting Voltage Range	[V]	23.76 ~ 24.24	47.52 ~ 48.48	-	-			
	Voltage Adjustment Range	[V]	22.5 ~ 28.5	45 ~ 55	-	-			
	Current	[A]	10.0	5.0	-	-			
	Rated Power	[W]	240	240	-	-			
	Line Regulations	[mV]	120	240	-	-			
	Load Regulations	[mV]	240	480	-	-			
	Temperature Drift	[mV]	360	720	-	-			
	Ripple& Noise(pk-pk) (*1)	[mV]	100	120	-	-			
	Turn-on Time typ.	[ms]	3600 (AC IN 100V, Io=100%)						
Hold-up Time typ.	[ms]	20 (AC IN 100V, Io=100%)							
INPUT	Voltage, Frequency	[V]	AC100 - 240(AC 90-264, 50/60Hz(47 - 63) or DC127-370V (Universal Input)						
	Current Typ. 110V	[A]	2.5		-				
	220V		1.25		-				
	Efficiency Typ. 110V	[%]	89	90	-	-			
	220V		91	92	-	-			
	Power factor Typ. 110V	-	0.98 (Io= 100%)	-	-	-			
	220V		0.93 (Io= 100%)						
	Inrush Current Typ. 110V	[A]	50 (Ta=25°C, Io=100% at Cold Start)						
220V									
Leakage Current 110V	[mA]	0.45 (Typ.)							
1mA Max 220V		0.75 (Typ.)							
Function	Over Voltage Protection	[V]	125% ~ 146% of rating						
	Over Current Protection ^(*)	[A]	110% of rating and recovers automatically						
	DC_OK Lamp		240						
	DC_LOW Lamp	-	LED (RED)						
	Remote ON.OFF	-	-						
	Parallel/Series Operation	-	Series operations is possible						
	Cooling / O.T.P	-	Convention Cooling						
Electrical Isolation	(1) Input - Output	-	AC 3.0KV 1min, cut-off: 20mA / DC 500V 100MΩ						
	(2) Input - F.G	-	AC 2.0KV 1min, cut-off: 20mA / DC 500V 100MΩ						
	(3) Output - F.G	-	AC 0.5KV 1min, cut-off:100mA / DC 500V 100MΩ						
Environment	Operating temp. & Humidity	-	-25 ~ +70°C(Required Derating), 20 ~ 90%RH (Non Condensing)						
	Storage temp. & Humidity	-	-40 ~ +75°C, 20 ~ 90% RH (Non Condensing)						
	Vibration	-	10~55Hz at 1G 3minutes period, 30minutes along X,Y and Z axis						
Dimension	Size(WxHxD) / Weight	mm/g	60 x 130 x 125 / 1200						
Safety	-	-	cUL, CE, CB		cUL, CE, CB				
Emission	Conducted Emission	-	Complies with EN55022-B						
PFHC	Harmonic Current	-	Complies with EN61000-3-2 (Class-D)						

(*1) Terminated with 0.1uF & 47uF parallel capacitor(Bandwidth=20MHz), (Ta=0°C~70°C)

(*2) Protection Mode : Current limiting with Hiccup Mode



ETA-USA


16170 Vineyard Blvd. Suite 180 Morgan Hill, CA 95037 <http://www.eta-usa.com>
Toll-free (US only): 800-ETA-POWR (800-382-7697) Telephone: 408 778-2793 FAX: 408-779-2753




AOFD-240

240W Din Rail Mount

1. BLOCK DIAGRAM

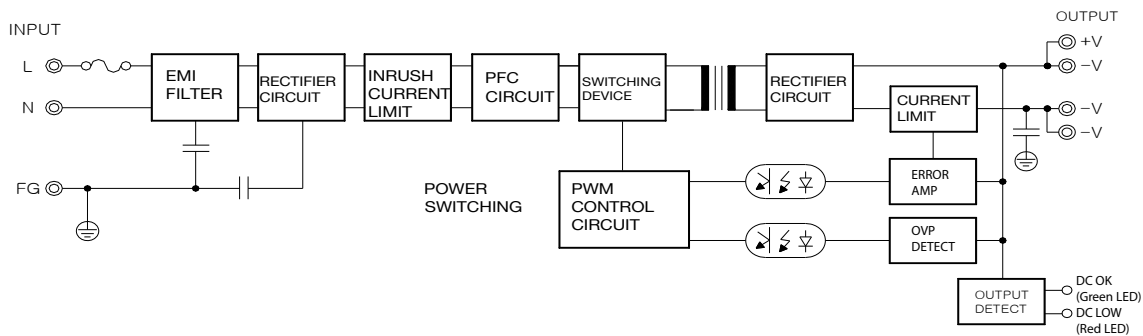

2. Terminal Pin Assignment and Front Controls

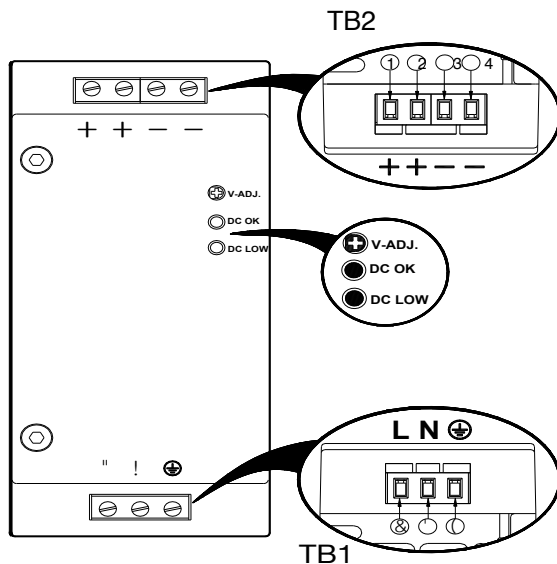

Marking	No.	Assignment
L	①	AC(L) Input Terminals
N	②	AC(N) Input Terminals
⊕	③	AC Grounding Terminal

TB2 : Output Terminal Assignment

Marking	No.	Assignment
+	①	DC (+) Output Terminals
+	②	
-	③	DC (-) Output Terminals
-	④	

Front Controls Assignment

Marking	Assignment
V-ADJ.	DC Output voltage adjustment
DC OK	DC Output indication LED (Green)
DC LOW	DC Output Low indication LED (Red)




3. Connection / Connecting Cable

Terminals	Solid or Stranded Wires		Torque	Stripping Length
	[mm ²]	[AWG]		
Input Terminals	(TB1)	0.5 ~ 2.5	30 ~ 12	0.5~0.6 8
Output Terminals	(TB2)	0.5 ~ 2.5	30 ~ 12	0.5~0.6 8





240W Din Rail Mount

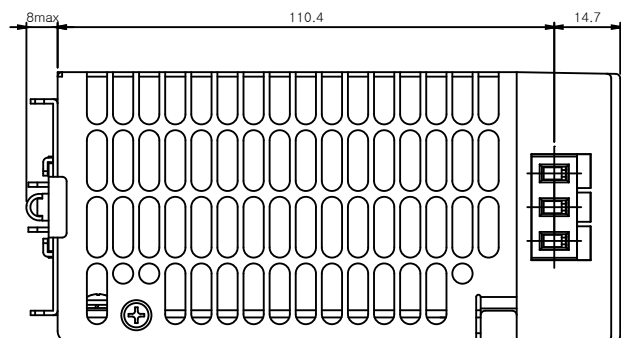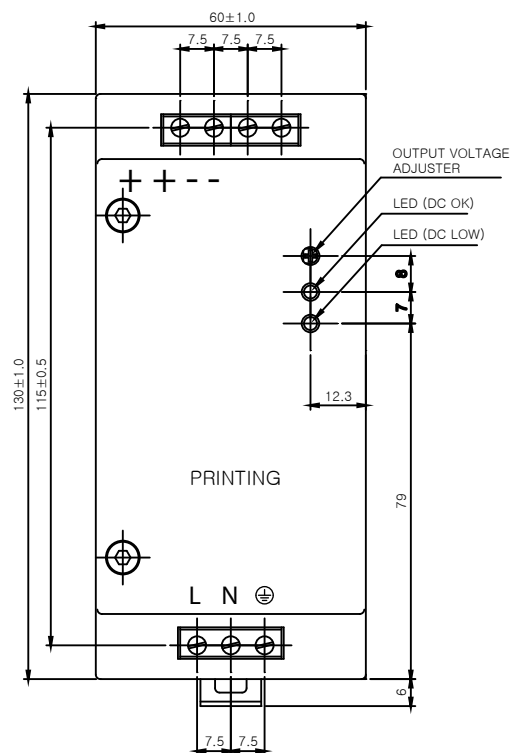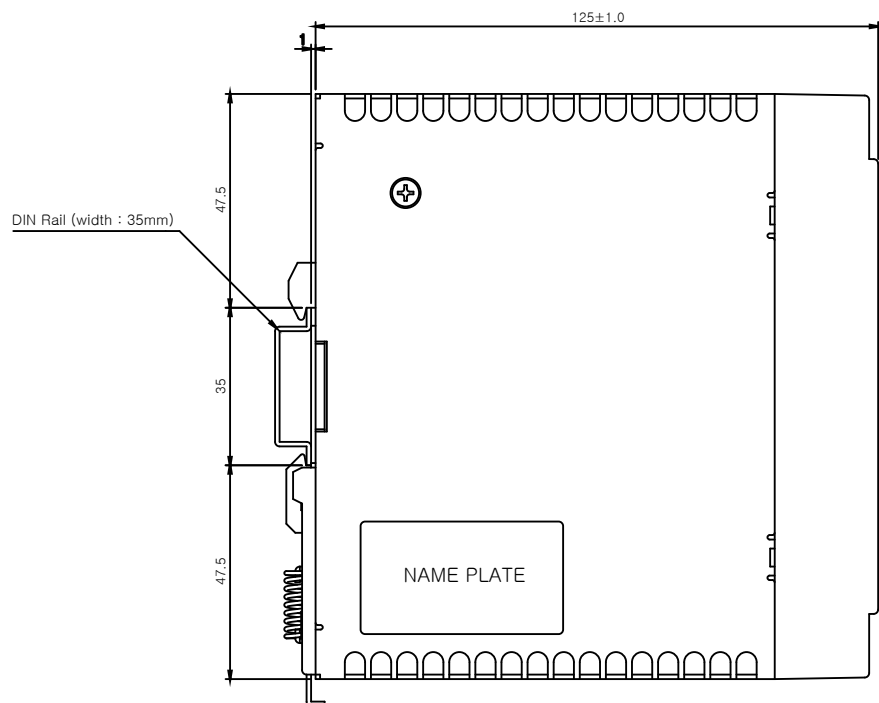**AOFD240-S**

- * Weight : 1.2Kg
- * Tolerance : ± 1
- * Dimensions in mm



ETA-USA

ETA-USA 16170 Vineyard Blvd. Suite 180 Morgan Hill, CA 95037 <http://www.eta-usa.com>
Toll-free (US only): 800-ETA-POWR (800-382-7697) Telephone: 408 778-2793 FAX: 408-779-2753

Toll-free (US only): 800-ETA-POWR (800-382-7697) Telephone: 408 778-2793 FAX: 408-779-2753




ETA-USA
The Power Professionals

AOFD-240

240W Din Rail Mount

Output Derating Curve

Note: When using the product between -25°C ~ 0°C, the output ripple and noise could exceed its specification.

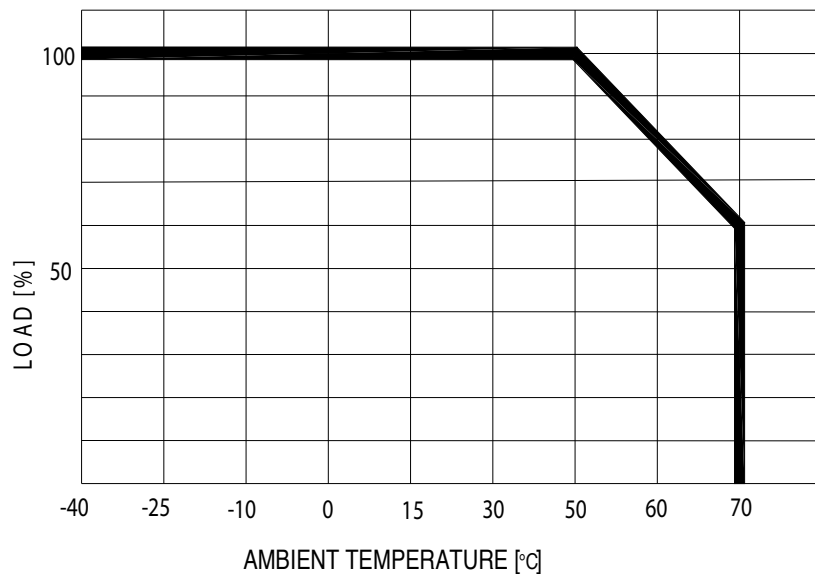

ETA-USA

16170 Vineyard Blvd. Suite 180 Morgan Hill, CA 95037 <http://www.eta-usa.com>
Toll-free (US only): 800-ETA-POWR (800-382-7697) Telephone: 408 778-2793 FAX: 408-779-2753

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com