

# Solid State Pressure Sensors

## D8M

### Solid State Pressure Sensors with Pulse or Frequency Outputs

- Compact housing measures 30L x 30W x 12.4H mm.
- Accept 4 mm OD tubing (D8M-R1); 6 mm OD tubing for D8M-D82.
- Chemical-resistant plastic (PBT) body.
- Metal shield mounted version (D8M-D82) available.
- IP40 enclosure rating for embedded applications.



### Ordering Information

Operating pressure range	Output signal	Output frequency	Power supply voltage	Withstand pressure	Model
0 to 4.9 kPa (0 to 0.71 psi)	Pulse count, 1 pulse/9.81 Pa (1/0.0014 psi)	—	2.2 to 3.4 VDC with regulator	19.6 kPa (2.84 psi) for 5 minutes	<b>D8M-D82</b>
0 to 196.13 Pa (0 to 0.028 psi)	Frequency, 1 kHz/9.81 Pa (1 kHz/0.0014 psi)	80 to 300 kHz	4.2 to 5.5 VDC with regulator	3 kPa (0.435 psi) for 10 seconds	<b>D8M-R1</b>

# Specifications

## ■ Electrical Ratings

Item	D8M-D82	D8M-R1
Power supply voltage	2.2 to 3.4 VDC with regulator	4.2 to 5.5 VDC with regulator
Current consumption	100 mA $\pm$ 5% at 3 VDC	10 mA max.
Leakage current	1 mA or less	1 mA or less
Output pulses	—	80 to 300 kHz
Output resolution	1 pulse/9.81 Pa	1 kHz/9.81 Pa
Operating characteristics	0 kPa = 30 pulses 0.15 kPa = 45 $\pm$ 30 pulses 2 kPa = 204 $\pm$ 15 pulses 4 kPa = 438 $\pm$ 46 pulses	0 Pa = 180 $\pm$ 100 kHz; Incremental change from 0 value: 49.03 Pa = 5 $\pm$ 0.9 kHz 73.55 Pa = 7.5 $\pm$ 1.0 kHz 147.10 Pa = 15 $\pm$ 0.8 kHz 196.13 Pa = 20 $\pm$ 1.4 kHz (Note)

**Note:** Values measured during and after testing.

## ■ Operating Characteristics

Item	D8M-D82	D8M-R1
Pressure range	0 to 4.9 kPa (0 to 0.71 psi)	0 to 196.13 Pa (0 to 0.028 psi)
Withstand pressure	19.6 kPa for 5 minutes	3 kPa for 10 seconds
Repeatability/hysteresis	$\pm$ 0.5% FS	$\pm$ 0.5% FS
Non-linearity characteristics	$\pm$ 2% FS max.	$\pm$ 2% FS max.
Response time	1.5 ms (pressure) 30 ms max. (switch) 45 ms (discharge)	3 seconds max.
Operating temperature (Note)	-10 to 60 °C	-20 to 70 °C
Storage temperature (Note)	-20 to 70 °C	-30 to 80 °C
Operating humidity	25 to 95%	25 to 95%

**Note:** With no icing or condensation.


## ■ Environmental Characteristics

Item	D8M-D82	D8M-R1
Insulation resistance	100 M $\Omega$ min., 250 VDC between lead terminals and the base	
Dielectric strength	250 VAC, 50/60 Hz for 1 minute between lead terminals and the base	500 VAC, 50/60 Hz for 1 minute between terminals and the base
Degree of protection	IP40	IP40
Pressure port	6 mm OD	4 mm OD
Connection method	Three AWG26 wires, 115 mm long	Wiring connector on bottom
Material	PBT (polybutylene terephthalate)	

# Operation

## ■ Response Timing Charts

### D8M-D82

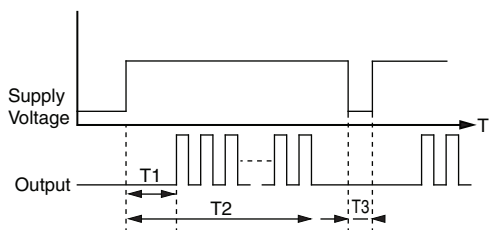


Model	T1	T2	T3
D8M-D82	1.5 ms min.	30 ms max.	45 ms max.

Legend: T1, Pressure measurement time  
 T2, Response time  
 T3, Electrical discharge time

### D8M-R1


Response time to 90% of 0.2kPa  
 Max. 3 seconds (excluding time for pressure change)

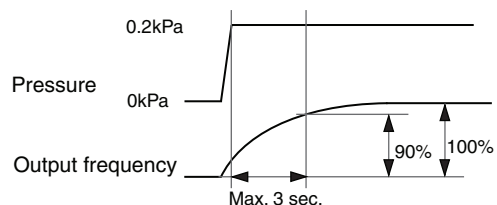

## ■ Interface Circuit Diagram

### D8M-R1

Response time to 90% of 0.2kPa  
 Max. 3 seconds (excluding time for pressure change)

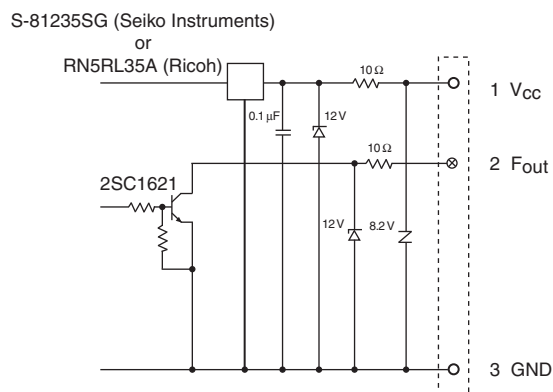

## Application Examples


Compact D8M solid state pressure sensors provide reliable detection for gas and air inflow for burner controls in water heaters, furnaces and other gas-fired devices. They can also be used in gas usage meters.




## Dimensions

Unit: mm (inch)


## ■ D8M-D82

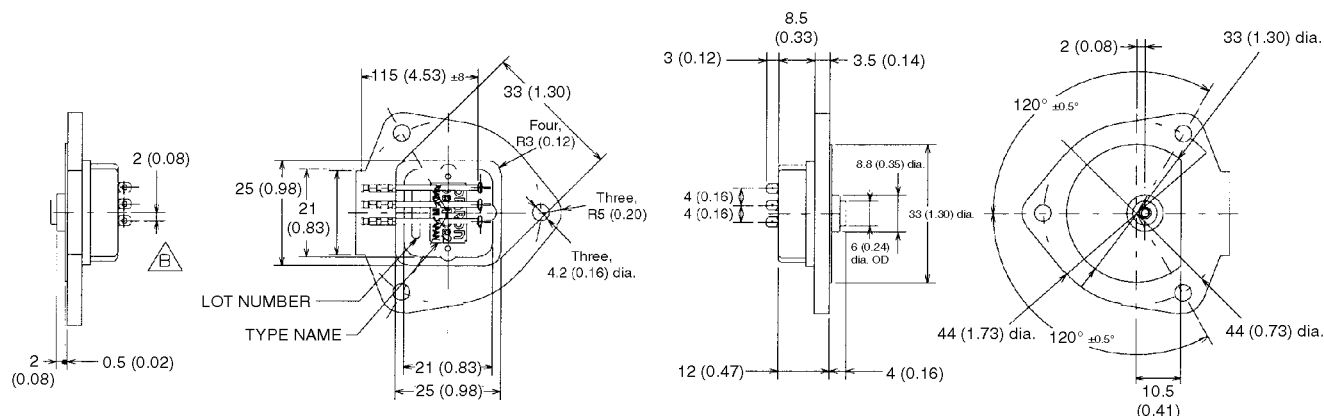


### Mounting Hole

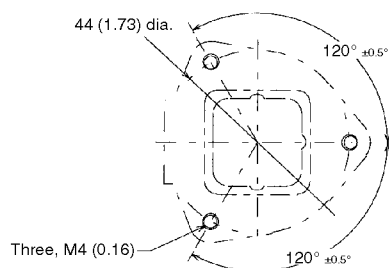

### Lead Arrangement (Left Side View)



## ■ D8M-R1

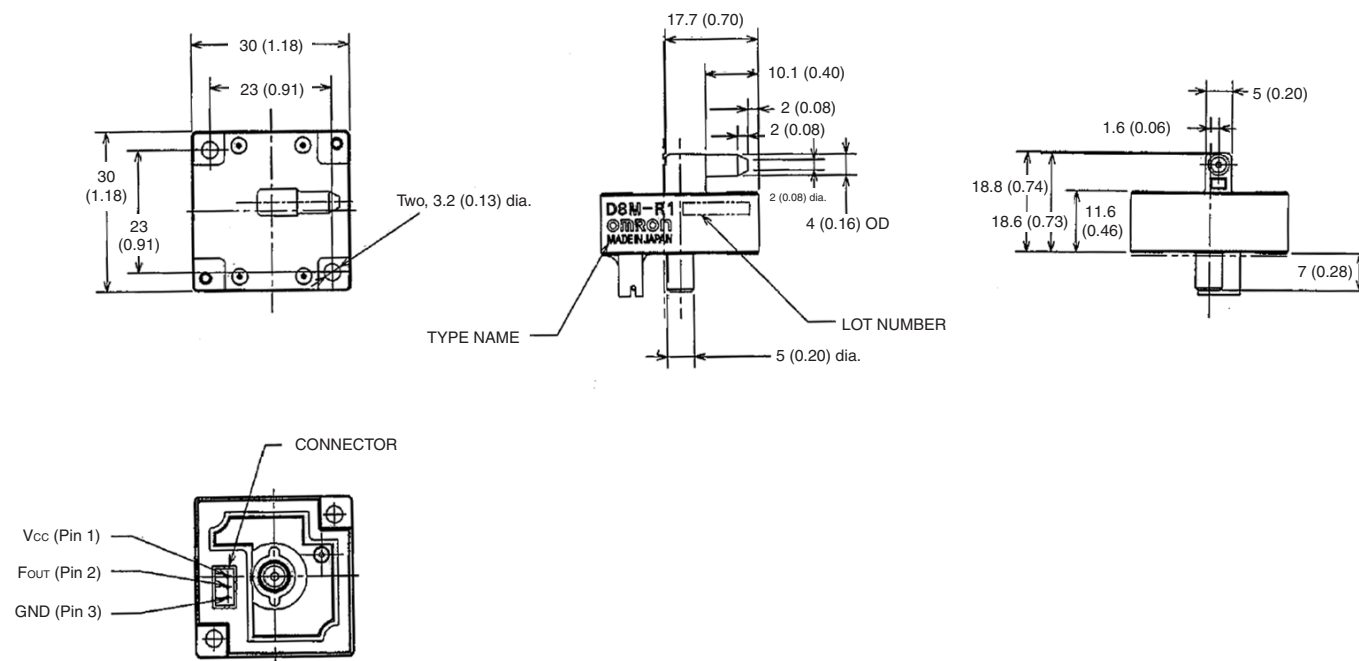

## Precautions

Be sure to abide by the following precautions for the safe operation of the Sensor.

## Mounting

For proper operation, mount the sensor within  $\pm 10$  degrees of level.



All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at [http://www.components.omron.com/components/web/webfiles.nsf/sales\\_terms.html](http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html)

**ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.**

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

---

**OMRON**<sup>®</sup>

**OMRON ELECTRONIC  
COMPONENTS LLC**

55 E. Commerce Drive, Suite B  
Schaumburg, IL 60173

**847-882-2288**

**OMRON ON-LINE**

Global - <http://www.omron.com>

USA - <http://www.components.omron.com>

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct      +86 (21) 6401-6692  
  
Email        amall@ameya360.com  
  
QQ          800077892  
  
Skype        ameyasales1 ameyasales2

➤ Customer Service :

Email        service@ameya360.com

➤ Partnership :

Tel          +86 (21) 64016692-8333  
  
Email        mkt@ameya360.com