


TABLE 2	
LEAD STYLE	"A"
-01	.085 [2.16]
-03	.116 [2.95]

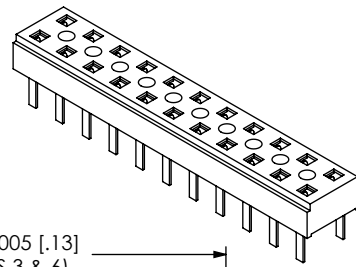

CLT-1XX-XX-XX-D

NO OF POSITIONS

-02 THRU -50
(PER ROW)

LEAD STYLE





-01: THROUGH HOLE
(USE C-114-02-XX)
(SEE NOTE 7)

-03: THROUGH HOLE
(USED C-114-03-XX)

BODY SPECIFICATION
-D: DOUBLE ROW


PLATING SPECIFICATION

(VALUES GIVEN ARE IN MICRO-INCHES)
-G: GOLD, 10 Au / 50 Ni MIN ON CONTACT,
3 Au / 50 Ni MIN ON TAIL.
-S: SELECTIVE, 30 Au / 50 Ni MIN
ON CONTACT, MATTE TIN TAIL.
-F: FLASH SELECTIVE, 3 Au / 50 Ni MIN
ON CONTACT, MATTE TIN TAIL.
-SM: SELECTIVE, 30 Au / 50 Ni MIN
ON CONTACT, MATTE TIN TAIL.
-FM: FLASH SELECTIVE, 3 Au / 50 Ni MIN
ON CONTACT, MATTE TIN TAIL.
-L: LIGHT SELECTIVE, 10 Au / 50 Ni MIN
ON CONTACT, MATTE TIN TAIL.
-LM: LIGHT SELECTIVE, 10 Au / 50 Ni MIN
ON CONTACT, MATTE TIN TAIL.

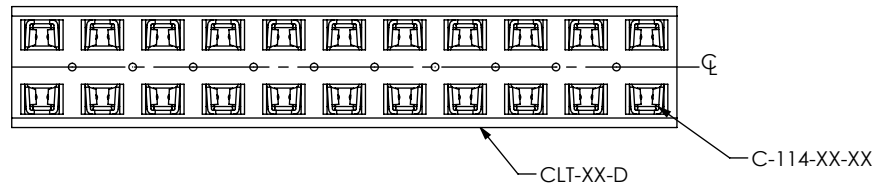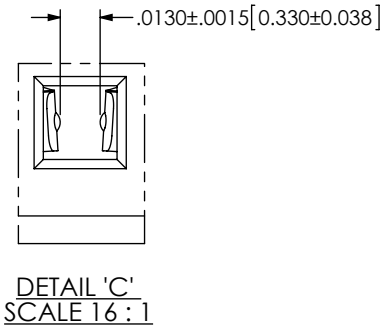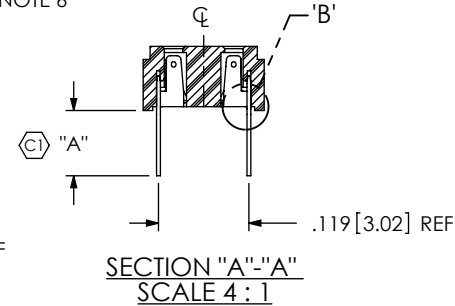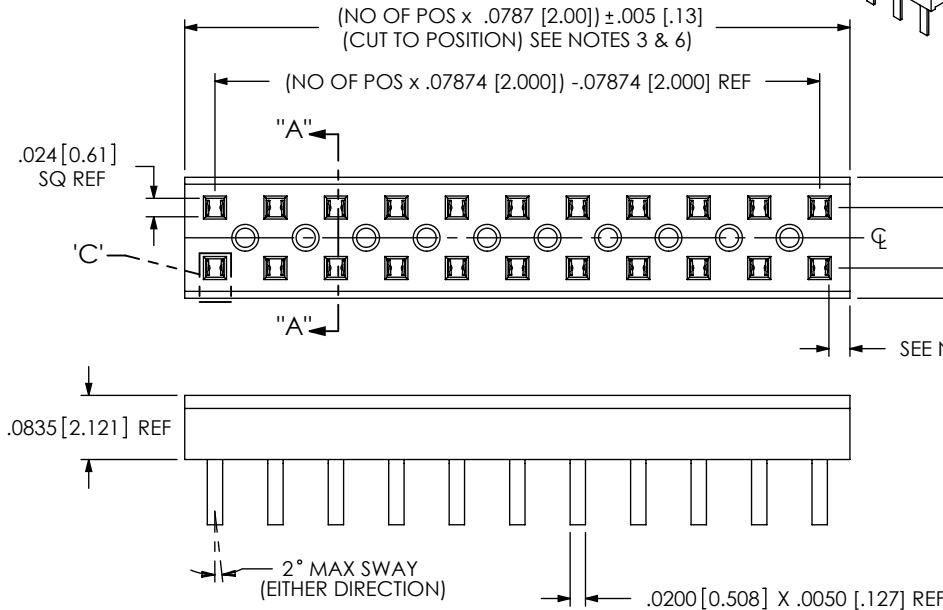


CLT-111-XX-XX-D SHOWN

PACKAGING VIEW



LEAD STYLE -01

PT-1-24-01-62
TP-12



LEAD STYLE -03

PT-1-24-01-37
TP-24-02

NOTES:

- ⊙ REPRESENTS A CRITICAL DIMENSION.
- MINIMUM PUSHOUT FORCE: .5 LB.
- PARTS TO BE SYMMETRICAL ABOUT C.
- WILL LOSE A POSITION FOR EVERY CUT MADE ON A SOCKET STRIP.
- PACKAGE POSITIONS -04 THRU -50 IN TUBES,
LAYER PACKAGE POSITION -02 THRU -03.
- ENDWALL AFTER CUTTING: .0215 MIN.
- C-114-22-XX CAN BE USED FOR C-114-02-XX. C-114-22-XX IS FOR
AUTOMATED ASSEMBLY PROCESSES ONLY.
- VOID CORES TO BE USED AS NEEDED TO CONTROL WARP,
LOCATION TO BE AT VENDOR DISCRETION

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES.

TOLERANCES ARE:

DECIMALS	ANGLES
.XX: ±.01 [.3]	10°
.XXX: ±.005 [.13]	
.XXXX: ±.0020 [.051]	

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS CONFIDENTIAL AND
PROPRIETARY INFORMATION AND ALL DESIGN,
MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS
AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC,
INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE
OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR
REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY
OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS
WRITTEN CONSENT OF SAMTEC, INC.

MATERIAL: DO NOT SCALE DRAWING
INSULATOR: LCP, UL 94 VO, COLOR: BLACK
CONTACT: PHOS BRONZE

SHEET SCALE: 4:1

DESCRIPTION:
2MM LOW PROFILE SOCKET STRIP

DWG. NO.
CLT-1XX-XX-XX-D

BY: PURVIS 11-02-95 SHEET 1 OF 1

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com