


Photomicrosensor (Transmissive)

EE-SX1109

■ Dimensions

Note: All units are in millimeters unless otherwise indicated.

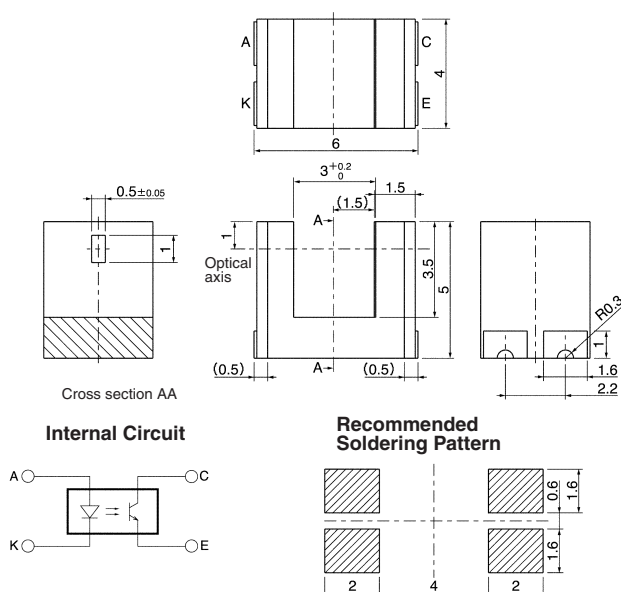

| Terminal No. | Name |
|--------------|-----------|
| A | Anode |
| K | Cathode |
| C | Collector |
| E | Emitter |

Unless otherwise specified, the tolerances are ± 0.15 mm.

■ Features

- Ultra-compact with a 6-mm-wide sensor and a 3-mm-wide slot.
- PCB surface mounting type.
- High resolution with a 0.5-mm-wide aperture.
- RoHS Compliant.

■ Absolute Maximum Ratings (Ta = 25°C)

| Item | Symbol | Rated value |
|---------------------|---------------------------|---|
| Emitter | Forward current | I_F 25 mA (see note 1) |
| | Pulse forward current | I_{FP} 100 mA (see note 2) |
| | Reverse voltage | V_R 5 V |
| Detector | Collector–Emitter voltage | V_{CEO} 20 V |
| | Emitter–Collector voltage | V_{ECO} 5 V |
| | Collector current | I_C 20 mA |
| | Collector dissipation | P_C 75 mW (see note 1) |
| | Operating | T_{opr} -30°C to 85°C |
| Ambient temperature | Storage | T_{stg} -40°C to 90°C |
| | Reflow soldering | T_{sol} 255°C (see note 3) |
| | Manual soldering | T_{sol} 350°C (see note 3) |

Note: 1. Refer to the temperature rating chart if the ambient temperature exceeds 25°C .

2. Duty: 1/100; Pulse width: 0.1 ms

3. Complete soldering within 10 seconds for reflow soldering and within 3 seconds for manual soldering.

■ Ordering Information


| Description | Model |
|---------------------------------|-----------|
| Photomicrosensor (transmissive) | EE-SX1109 |

■ Electrical and Optical Characteristics (Ta = 25°C)


| Item | Symbol | Value | Condition |
|--------------|--------------------------------------|---|--|
| Emitter | Forward voltage | V_F 1.1 V typ., 1.3 V max. | $I_F = 5$ mA |
| | Reverse current | I_R 10 μA max. | $V_R = 5$ V |
| | Peak emission wavelength | λ_P 940 nm typ. | $I_F = 20$ mA |
| Detector | Light current | I_L 50 μA min., 150 μA typ., 500 μA max. | $I_F = 5$ mA, $V_{CE} = 5$ V |
| | Dark current | I_D 100 nA max. | $V_{CE} = 10$ V, 0 lx |
| | Leakage current | I_{LEAK} --- | --- |
| | Collector–Emitter saturated voltage | $V_{CE(sat)}$ 0.1 V typ., 0.4 V max. | $I_F = 20$ mA, $I_L = 50$ μA |
| | Peak spectral sensitivity wavelength | λ_P 900 nm typ. | --- |
| Rising time | t_r | 10 μs typ. | $V_{CC} = 5$ V, $R_L = 1$ k Ω , $I_L = 100$ μA |
| Falling time | t_f | 10 μs typ. | $V_{CC} = 5$ V, $R_L = 1$ k Ω , $I_L = 100$ μA |

■ Engineering Data


Forward Current vs. Collector Dissipation Temperature Rating

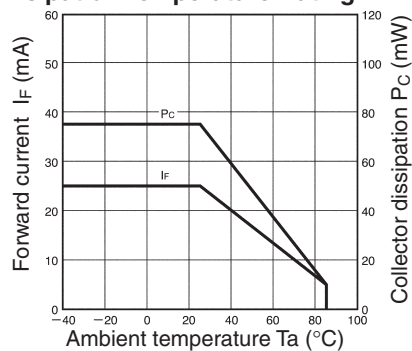


Forward Current vs. Forward Voltage Characteristics (Typical)

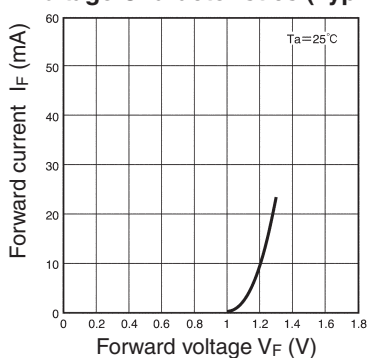


Light Current vs. Forward Current Characteristics (Typical)

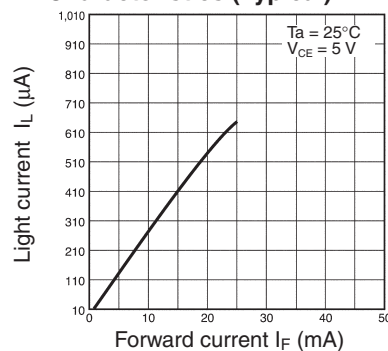


Light Current vs. Collector-Emitter Voltage Characteristics (Typical)

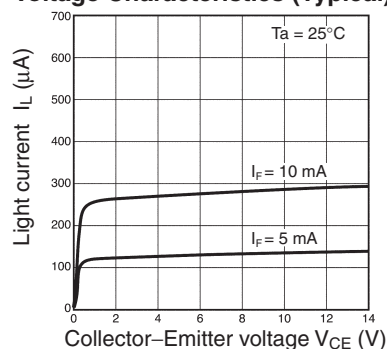


Relative Light Current vs. Ambient Temperature Characteristics (Typical)

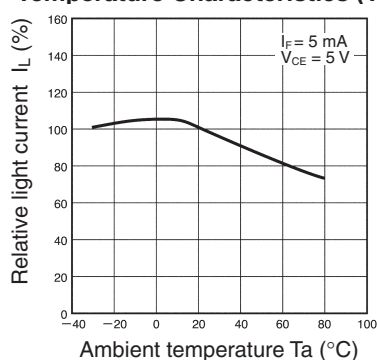


Dark Current vs. Ambient Temperature Characteristics

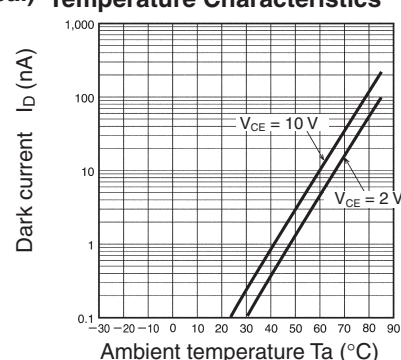


Response Time vs. Load Resistance Characteristics

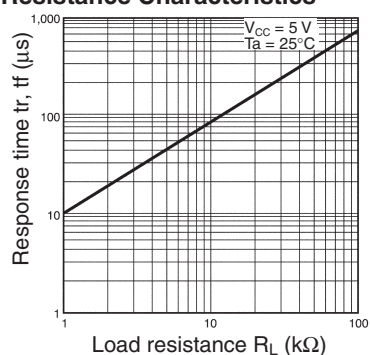


Sensing Position Characteristics (Typical)

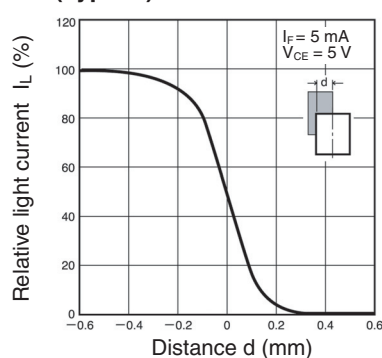

Sensing Position Characteristics (Typical)

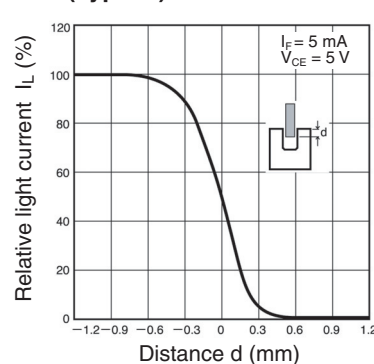


Response Time Measurement Circuit

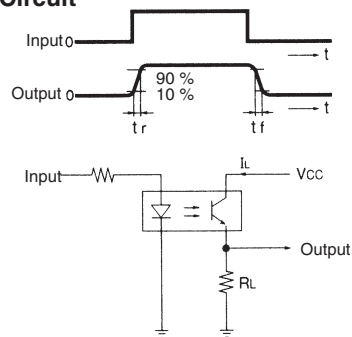


Unit: mm (inch)

■ Tape and Reel


Reel

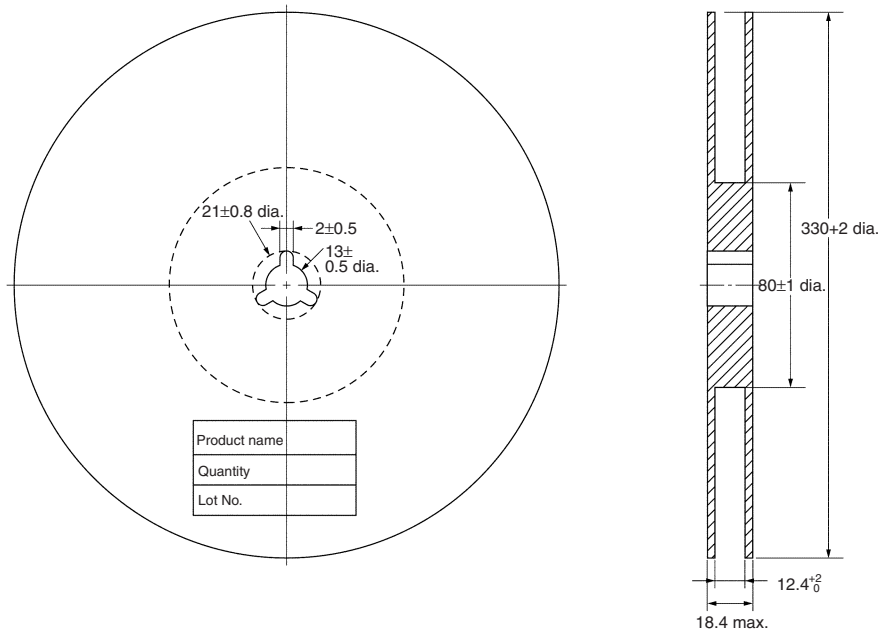

Tape

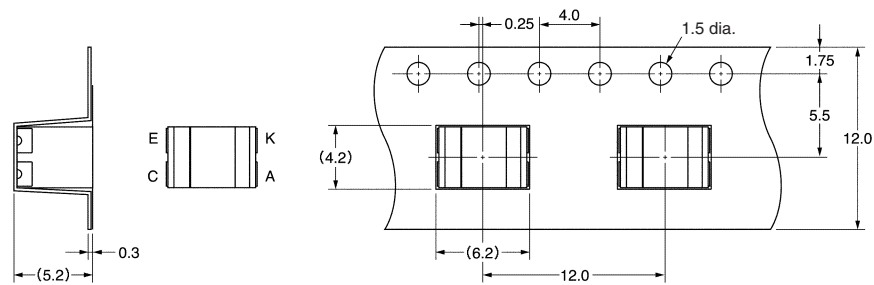

Tape configuration

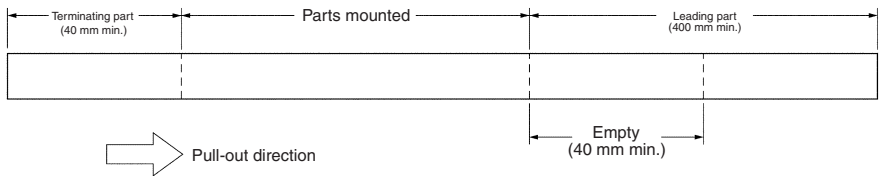

Tape quantity


1,000 pcs./reel

Precautions

■ Soldering Information

Reflow soldering

- The following soldering paste is recommended:
Melting temperature: 216 to 220°C
Composition: Sn 3.5 Ag 0.75 Cu
- The recommended thickness of the metal mask for screen printing is between 0.2 and 0.25 mm.
- Set the reflow oven so that the temperature profile shown in the following chart is obtained for the upper surface of the product being soldered.

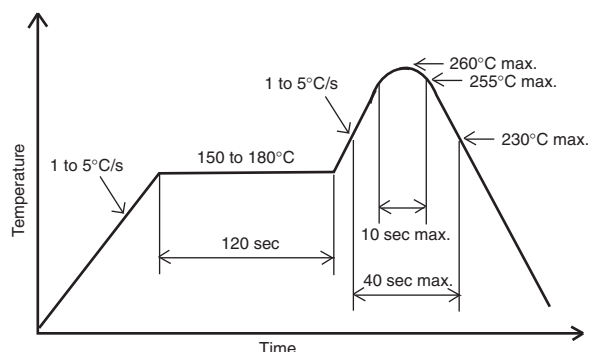

Manual soldering

- Use "Sn 60" (60% tin and 40% lead) or solder with silver content.
- Use a soldering iron of less than 25 W, and keep the temperature of the iron tip at 300°C or below.
- Solder each point for a maximum of three seconds.
- After soldering, allow the product to return to room temperature before handling it.

Storage

To protect the product from the effects of humidity until the package is opened, dry-box storage is recommended. If this is not possible, store the product under the following conditions:

Temperature: 10 to 30°C

Humidity: 60% max.

The product is packed in a humidity-proof envelope. Reflow soldering must be done within 48 hours after opening the envelope, during which time the product must be stored under 30°C at 80% maximum humidity.


If it is necessary to store the product after opening the envelope, use dry-box storage or reseal the envelope.

Baking

If a product has remained packed in a humidity-proof envelope for six months or more, or if more than 48 hours have lapsed since the envelope was opened, bake the product under the following conditions before use:

Reel: 60°C for 24 hours or more

Bulk: 80°C for 4 hours or more

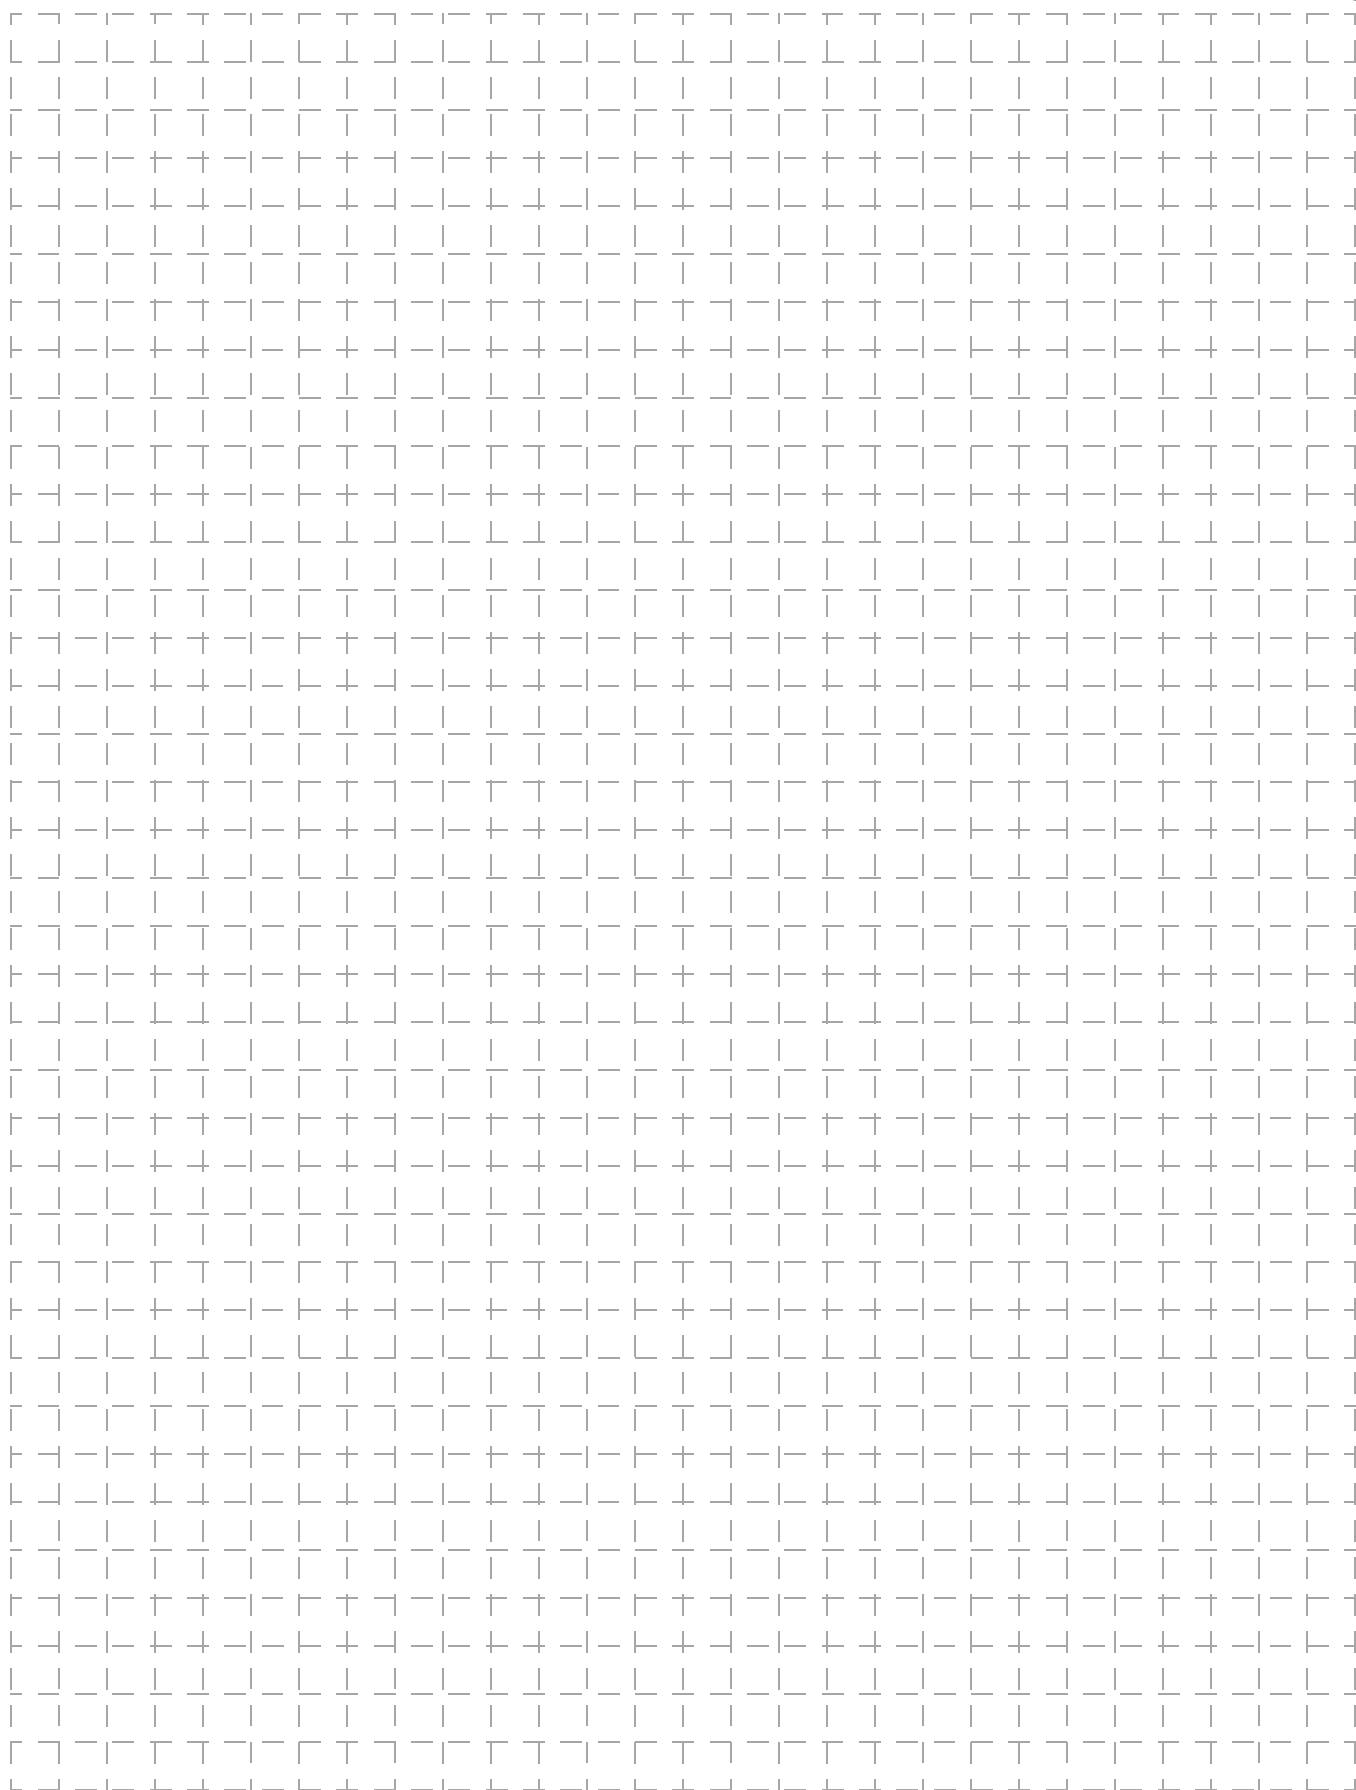

All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

OMRON[®]

**OMRON ELECTRONIC
COMPONENTS LLC**

55 E. Commerce Drive, Suite B
Schaumburg, IL 60173

847-882-2288

OMRON ON-LINE

Global - <http://www.omron.com>

USA - <http://www.components.omron.com>

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com