

SPECIFICATION

Part No.	:	TG.22.0221
Product Name	:	2G/3G Penta-Band Cellular Connector Mount Monopole Antenna Straight FME Female Connector 824 MHz ~ 2170 MHz
Features	:	Works with GSM/GPRS/CDMA/HSPA/UMTS/EDGE Omni-Directional Robust and Compact 0dBi Gain for lower cellular bands, 4dBi for higher cellular bands FME(F) Straight, 50 ohms 52.3*7.8 mm RoHS Compliant



1. INTRODUCTION

The TG.22 2G/3G Penta-band from 824MHz to 2170MHz monopole antenna is a quality robust antenna with high gain in small form factor.

Connection is made via straight FME(F) connector with a hardened TPEE casing, this antenna is a good compact 2G/3G antenna for remote monitoring devices or telematics applications.

The TG.22.0221 antenna has been tuned specifically for optimum efficiency when connected directly to the Sierra Wireless Airlink GL series programmable module.

2. SPECIFICATION

ELECTRICAL

Standard	GSM Penta-Band				
Operation Frequency (MHz)	824-896	880-960	1710-1880	1850-1990	1920-2170
Polarization	Linear				
Impedance	50 ohm				
VSWR	3:1	2:1	2:1	2:1	3:1
Return Loss (dB)	<-5dB	<-5dB	<-10dB	<-10dB	<-10dB
Efficiency (%)	37.36	45.47	69.96	71.75	66.79
Gain (dBi)	-0.37	-0.13	3.35	4.00	4.08
Average Gain (dB)	-4.30	-3.43	-1.55	-1.44	-1.76
Max Input Power	5W				

* The TG.22 antenna performance was measured on a 62*46.5 mm evaluation board

MECHANICAL

Dimensions (mm)	52.3*7.8
Required Space (mm)	52.3*7.8
Material	TPEE
Connector	FME(F) ST
Weight	8g
Recommended Torque for Mounting	0.78N·m
Max Torque for Mounting	1.47N·m

ENVIRONMENTAL

Operation Temperature	-40°C to 85°C
Storage Temperature	-40°C to 85°C
Relative Humidity	40% to 95%
RoHs Compliant	Yes

3. TEST SET UP

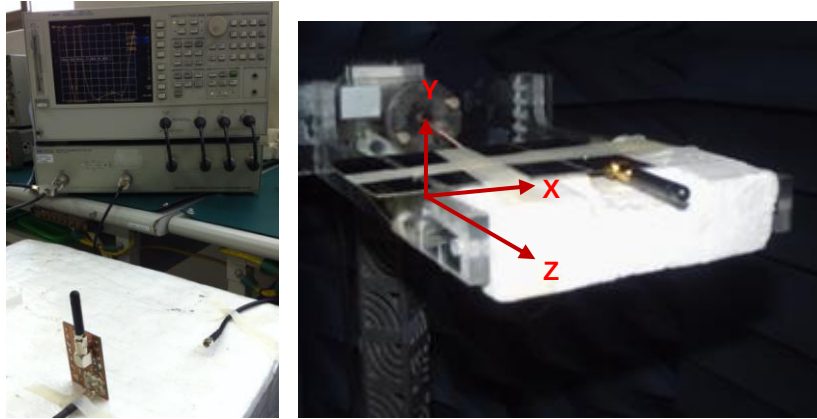


Figure 1. Impedance measurements (left hand) and peak gain, efficiency and radiation pattern measurements (right hand).

4. ANTENNA PARAMETERS

4.1. Return Loss

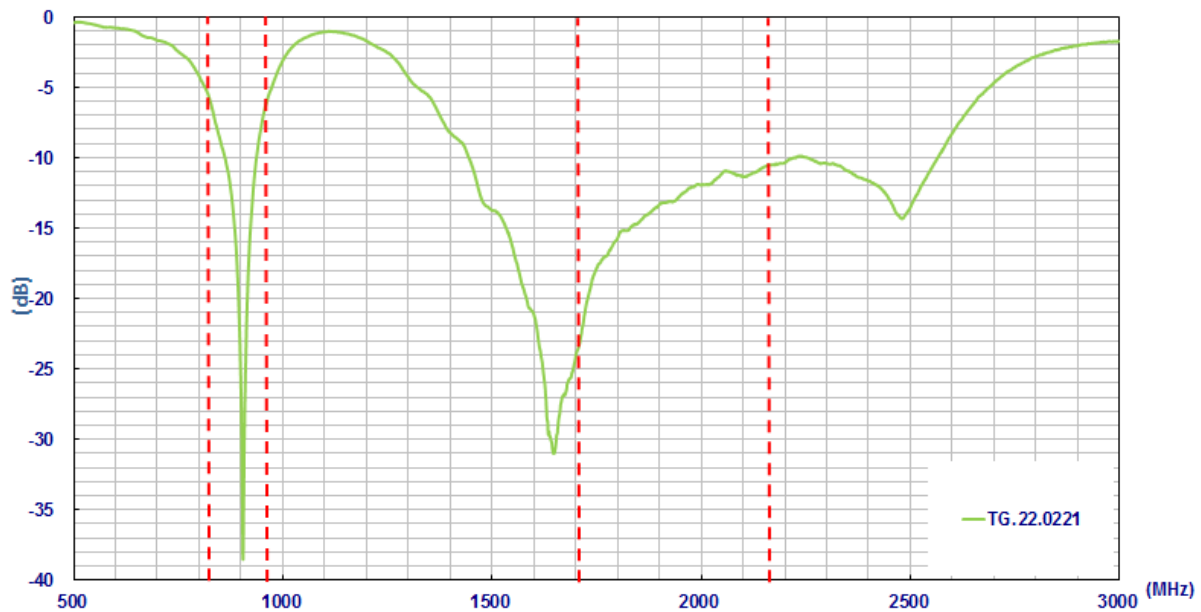


Figure 2. Return loss of the TG.22 antenna.

4.2. Efficiency

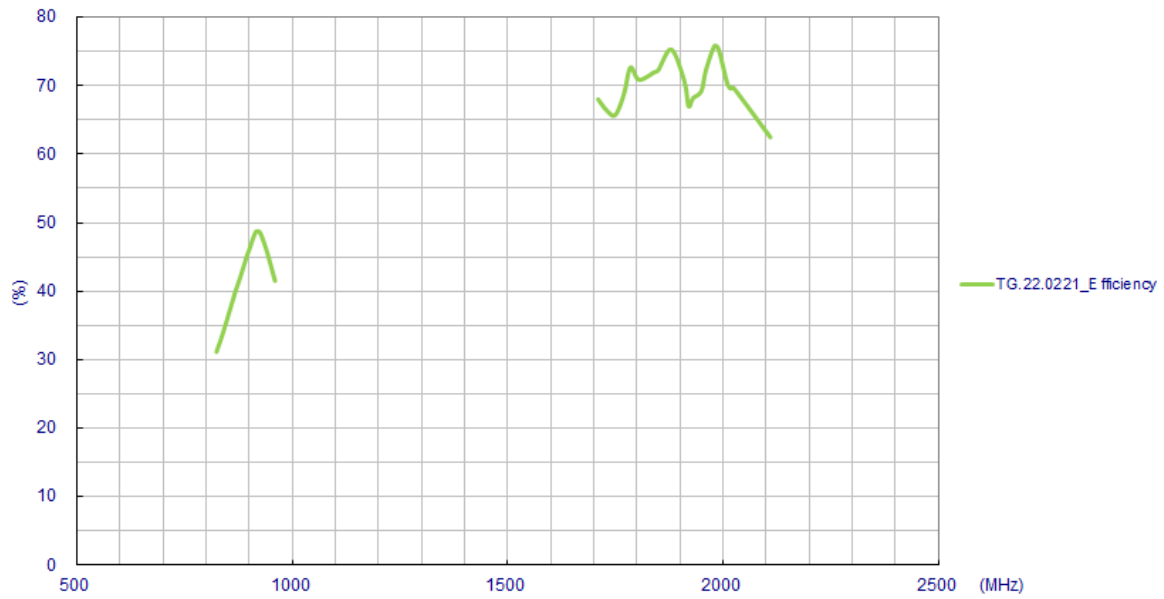


Figure 3. Efficiency of the TG.22 antenna.

4.3. Peak Gain

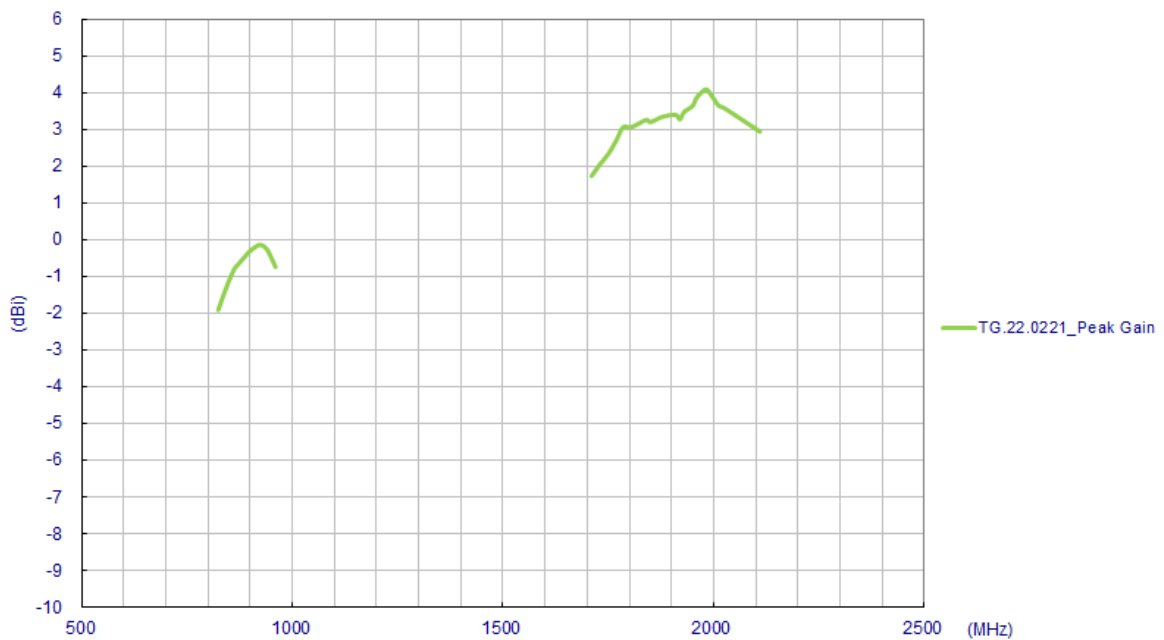


Figure 4. Peak Gain of the TG.22 Antenna.

4.4. Average Gain



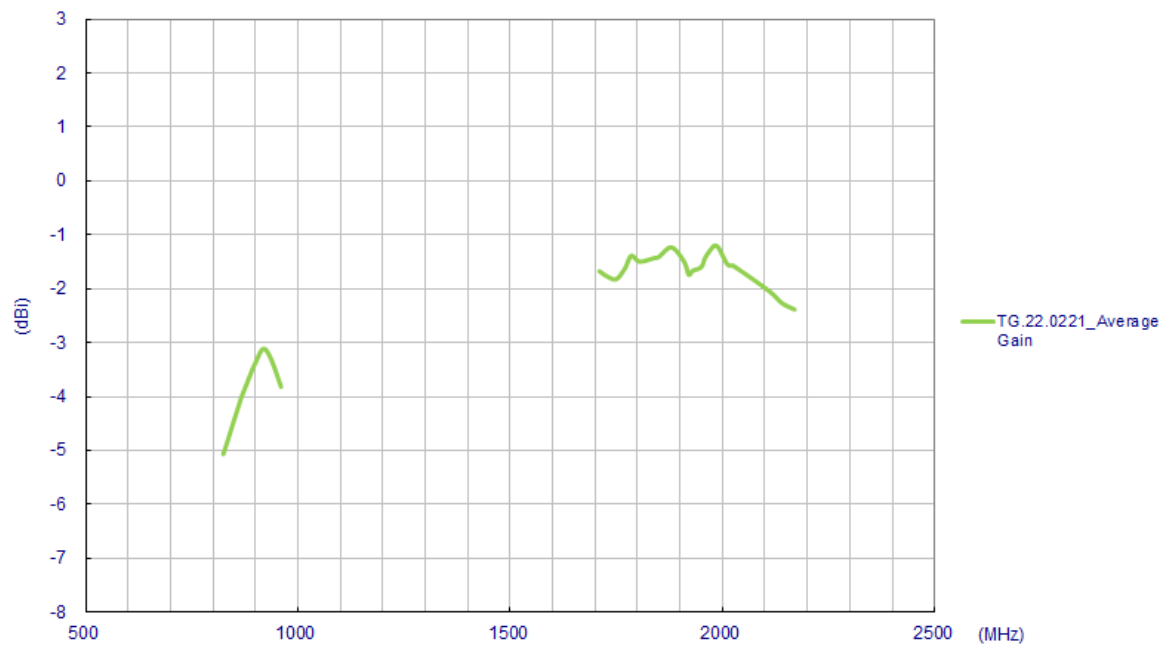




Figure 5. Average Gain of the TG.22 Antenna.

5. Antenna Radiation Patterns

5.1. 2D Radiation pattern XY-Plane

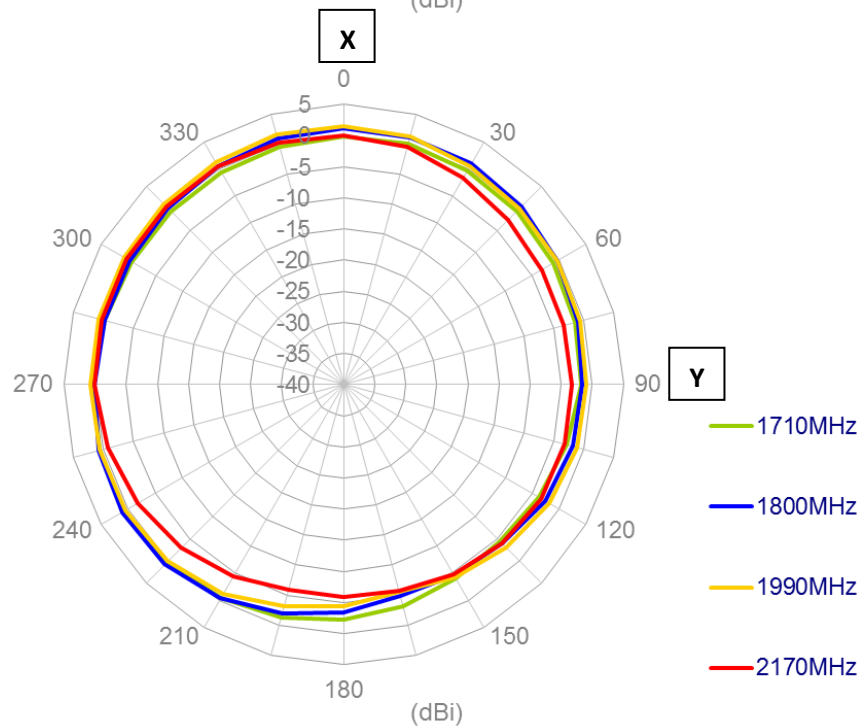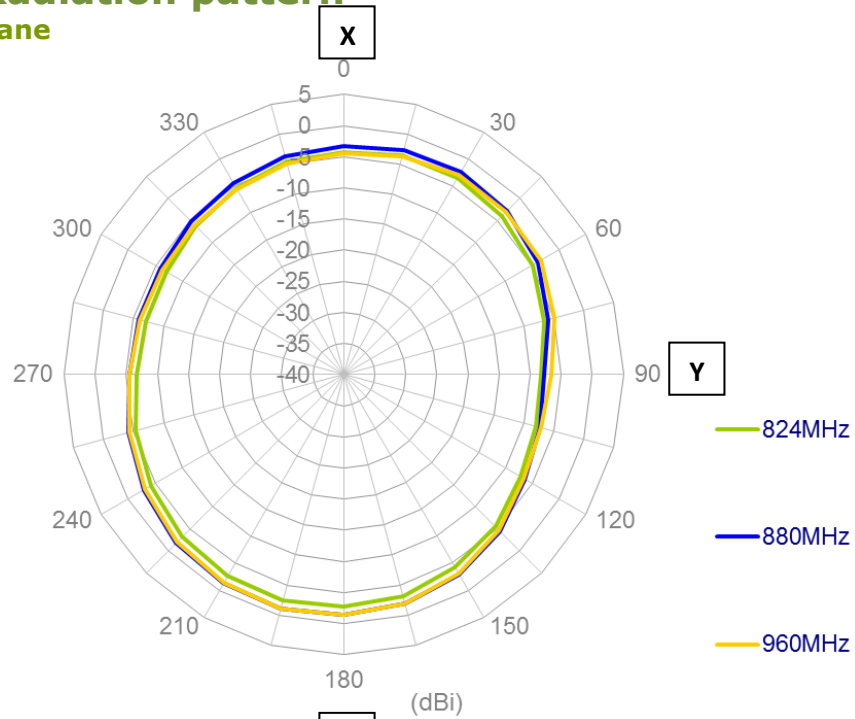

XZ-Plane

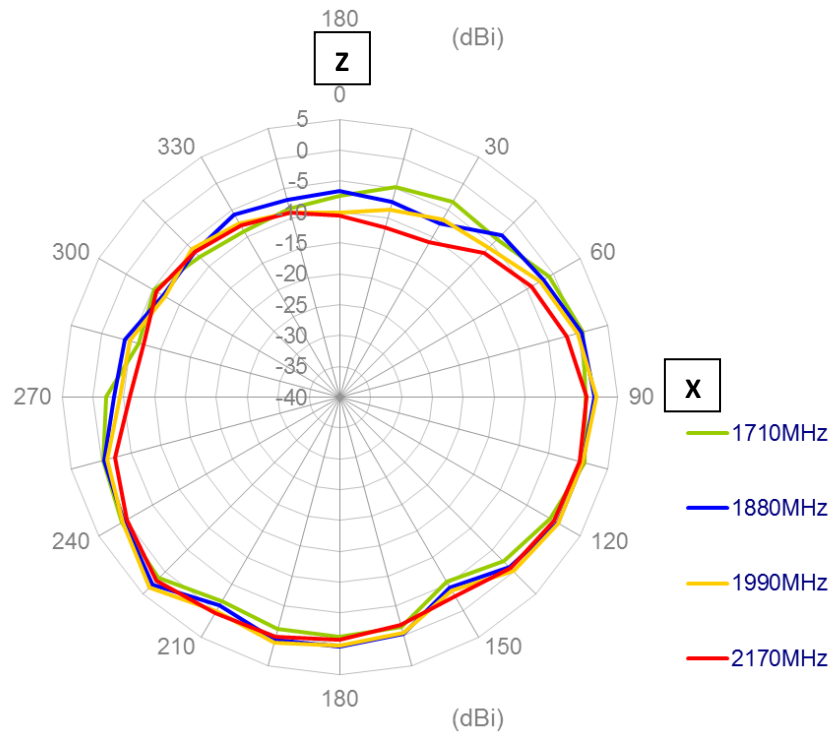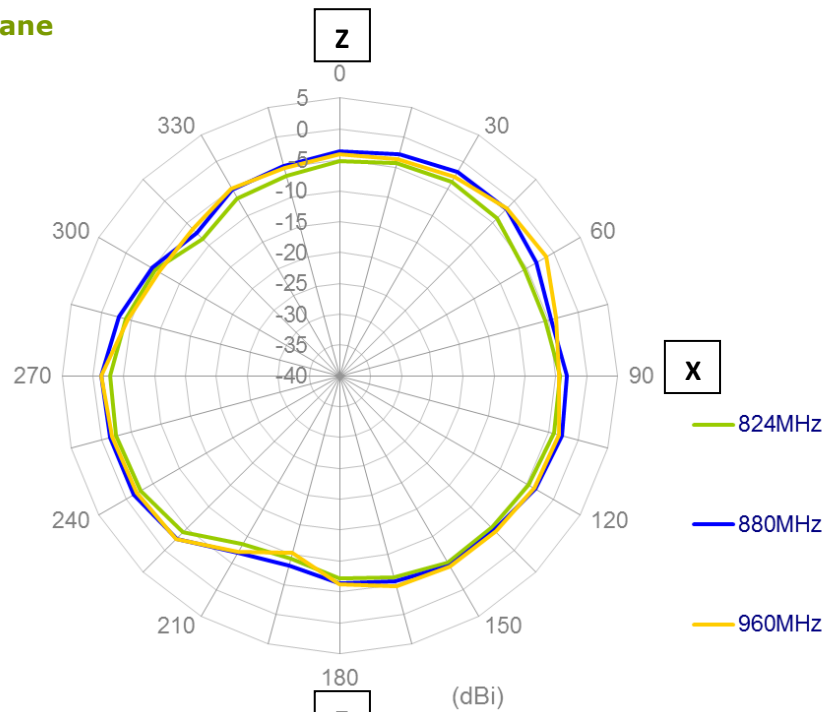

YZ-Plane


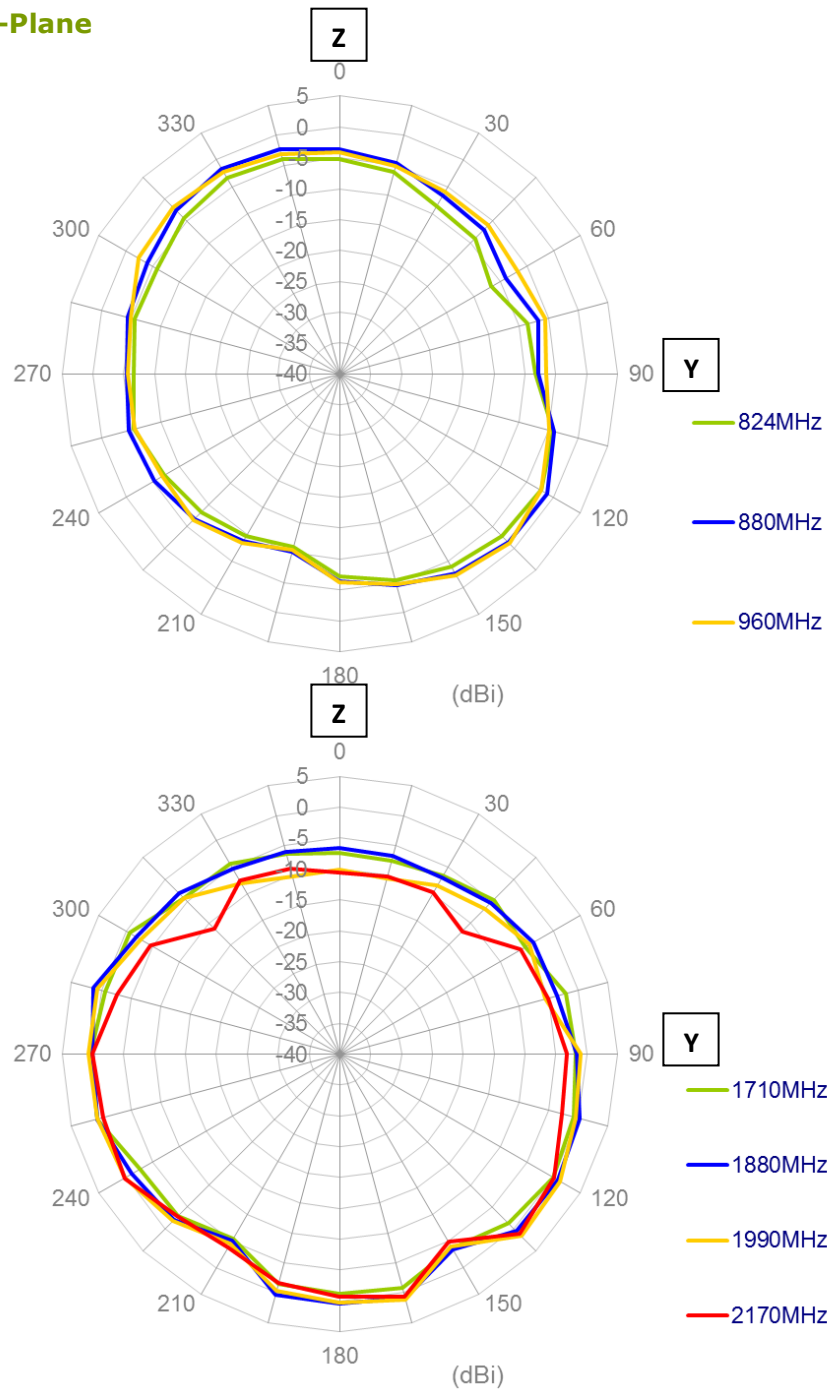


Figure 6. 2D Radiation Pattern of the TG.22 Antenna.

6. Mechanical Drawing

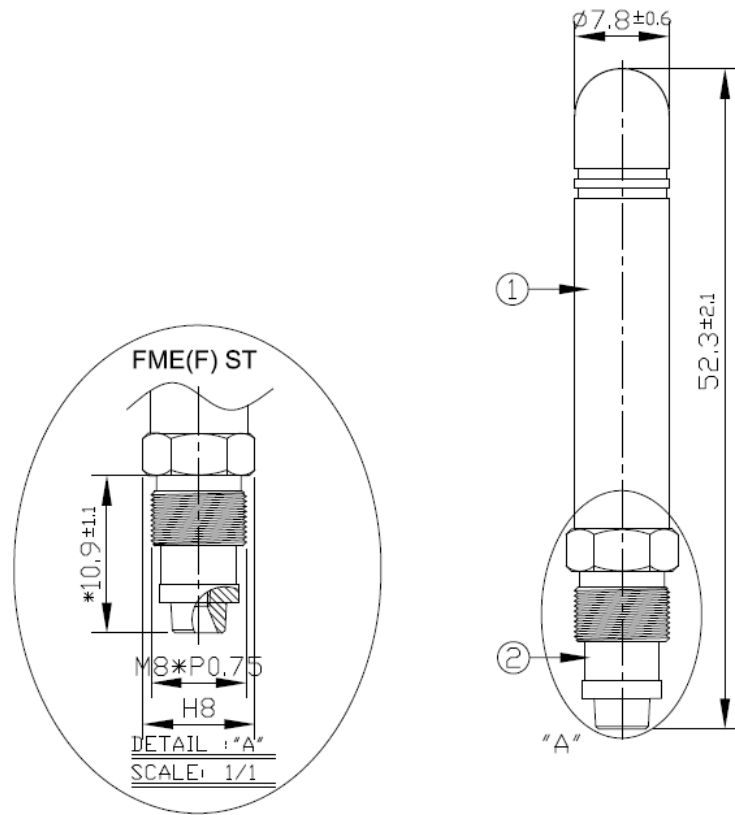

	Name	P/N	Material	Finish	QTY
①	Antenna Housing	000111F030002A	TPEE	Black	1
②	FME(F) ST	211614D000002A	Brass	NI Plated	1

Figure 7. Mechanical Drawings of the TG.22

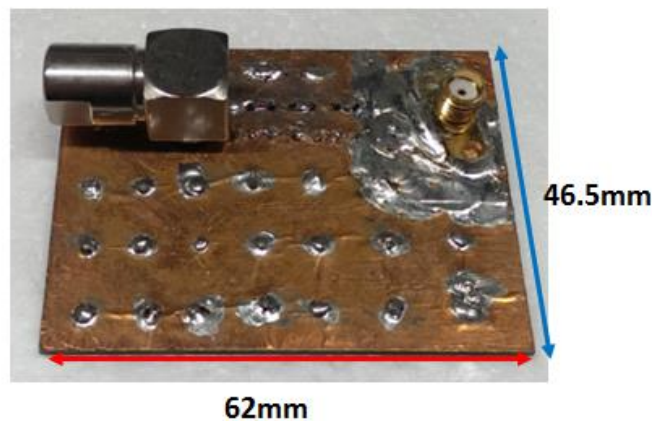


Figure 8. TG.22 Antenna EVB

7. Installation Guide


Recommended Torque for Mounting $0.78\text{N}\cdot\text{m}$

Maximum Torque for Mounting $1.47\text{N}\cdot\text{m}$



8. Packaging

Put 1pcs TG.22 antenna per small PE bag, 100 small PE bags put in one big PE bag. Final package will have 100pcs TG.22 antennas in the big PE bag.

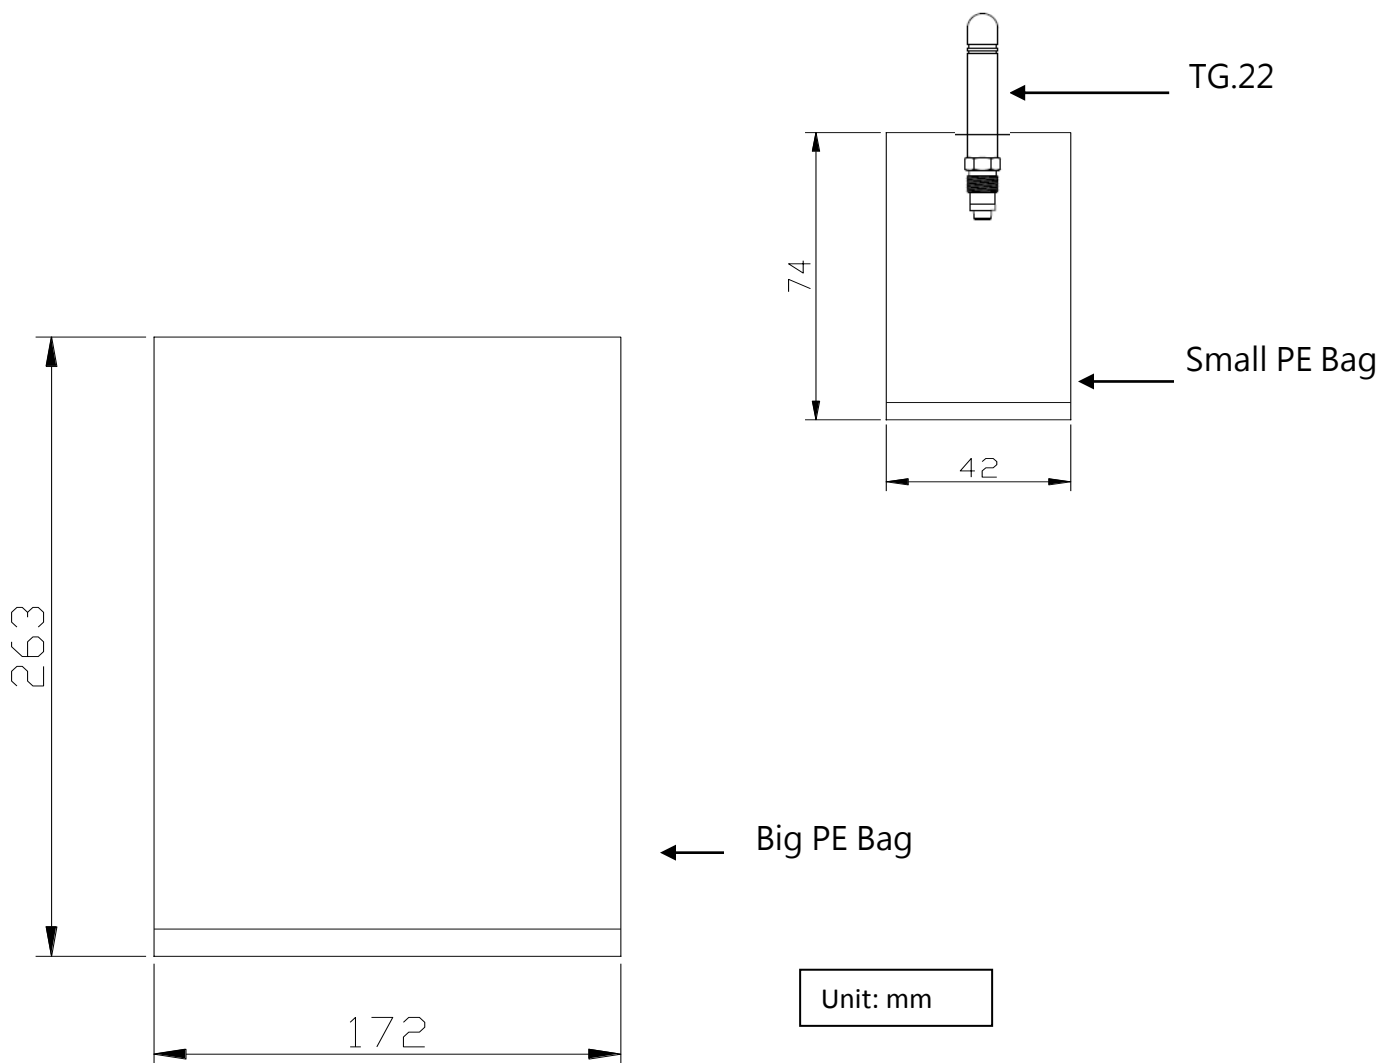

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com