

ROCKER SWITCHES



Contact Rating:	6A @ 125VAC 3A @ 250VAC
Life Expectancy (Mechanical):	20,000 cycles
Life Expectancy (Electrical):	6,000 cycles
Contact Resistance:	50 mΩ Max. (Initial)
Insulation Resistance:	100M Ω @ 500V DC
Dielectric Strength:	1,500VAC (1 minute)
Operating Temp:	0°C to 65°C

MATERIALS

Material:	UL94-V2
Termination:	Solder lug, silver-plated

FEATURES & BENEFITS

- ▶ Ergonomic feel
- ▶ Visually appealing
- ▶ Multiple options

APPLICATIONS/MARKETS

- ▶ Industrial
- ▶ Audio/visual
- ▶ Lighting ballast

HOW TO ORDER

SERIES RR	MODEL NO. □ □ □ □ 3402	CIRCUIT □ See Below	HOUSING COLOR □ □ BLK = Black	ACTUATOR COLOR □ □ □ BLK = Black	MARKING □ N = None	TERMINATION □ S = Solder Lug
----------------------------	-------------------------------------	----------------------------------	--	---	---------------------------------	---

CIRCUIT CODE:



A = SPST	On-None-Off
C = SPDT	On-None-On
D = SPDT	On-Off-On

Example Ordering Number


RR-3402-A-BLK-BLK-N-S

Specifications subject to change without notice.

RR 3402

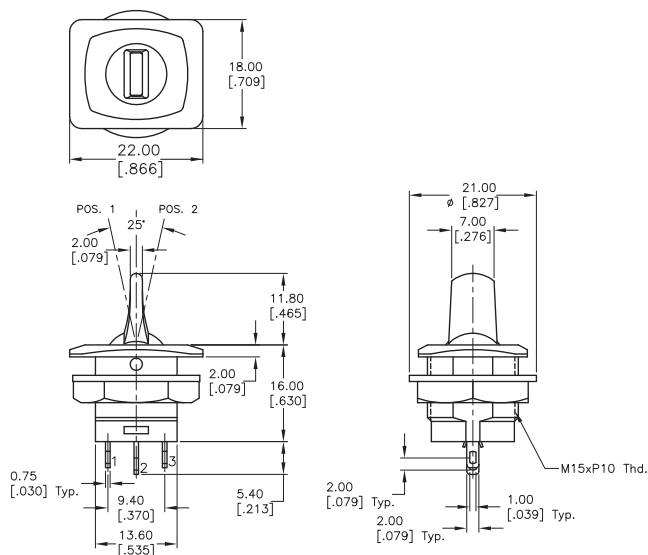

PANEL MOUNT



SCHEMATIC

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com