

MOS FET Relays


G3VM-401G

Analog-Switching MOS FET Relays in 400-V Load Voltage Series

- 4-pin SOP package in the 400-V load voltage series.
- Continuous load current of 120 mA.
- Dielectric strength of 1,500 Vrms between I/O.
- RoHS Compliant.

■ Application Examples

- Broadband systems
- Measurement devices and Data loggers
- Amusement machines

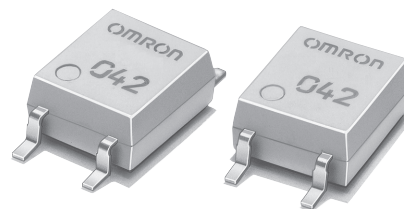

Note: The actual product is marked differently from the image shown here.

■ List of Models

Contact form	Terminals	Load voltage (peak value)	Model	Number per stick	Number per tape
SPST-NO	Surface-mounting terminals	400 VAC	G3VM-401G	100	---
			G3VM-401G(TR)	---	2,500


■ Dimensions

Note: All units are in millimeters unless otherwise indicated.

G3VM-401G




Note: The actual product is marked differently from the image shown here.

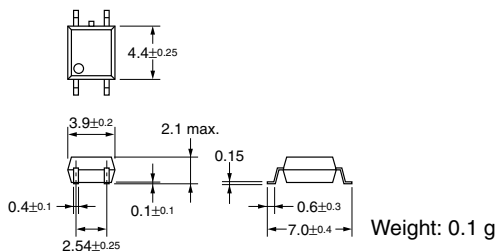


■ Terminal Arrangement/Internal Connections (Top View)

G3VM-401G



■ Actual Mounting Pad Dimensions (Recommended Value, Top View)

G3VM-401G



Absolute Maximum Ratings (Ta = 25°C)


Item	Symbol	Rating	Unit	Measurement conditions
Input	LED forward current	I_F	50	mA
	Repetitive peak LED forward current	I_{FP}	1	A
	LED forward current reduction rate	$\Delta I_F/^\circ\text{C}$	-0.5	mA/°C
	LED reverse voltage	V_R	5	V
	Connection temperature	T_J	125	°C
Output	Load voltage (AC peak/DC)	V_{OFF}	400	V
	Continuous load current	I_O	120	mA
	ON current reduction rate	$\Delta I_{ON}/^\circ\text{C}$	-1.2	mA/°C
Dielectric strength between input and output (See note 1.)		V_{I-O}	1,500	V_{rms}
Operating temperature		T_a	-40 to +85	°C
Storage temperature		T_{stg}	-55 to +125	°C
Soldering temperature (10 s)		---	260	°C

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

Electrical Characteristics (Ta = 25°C)

Item	Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions
Input	LED forward voltage	V_F	1.0	1.15	1.3	V
	Reverse current	I_R	---	---	10	μA
	Capacity between terminals	C_T	---	30	---	pF
	Trigger LED forward current	I_{FT}	---	1	3	mA
Output	Maximum resistance with output ON	R_{ON}	---	17	35	Ω
	Current leakage when the relay is open	I_{LEAK}	---	0.003	1.0	μA
	Capacity between terminals	C_{OFF}	---	70	---	pF
Capacity between I/O terminals		C_{I-O}	---	0.8	---	pF
Insulation resistance		R_{I-O}	1,000	---	---	M Ω
Turn-ON time		t_{ON}	---	0.3	1	ms
Turn-OFF time		t_{OFF}	---	0.1	1	ms

Note: 2. Turn-ON and Turn-OFF Times




Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.


Item	Symbol	Minimum	Typical	Maximum	Unit
Load voltage (AC peak/DC)	V_{DD}	---	---	320	V
Operating LED forward current	I_F	5	7.5	25	mA
Continuous load current (AC peak/DC)	I_O	---	---	120	mA
Operating temperature	T_a	-20	---	65	°C

■ Engineering Data


LED forward current vs.
Ambient temperature

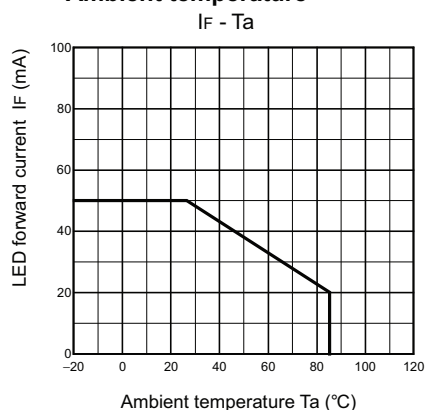


Continuous load current vs.
Ambient temperature

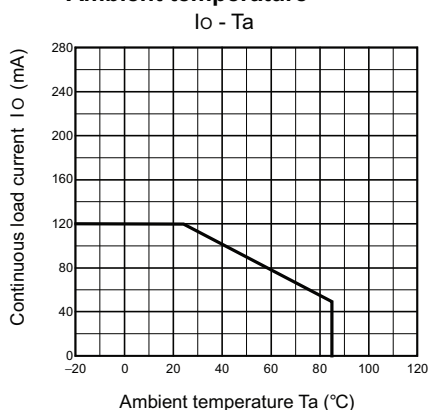


LED forward current vs.
LED forward voltage

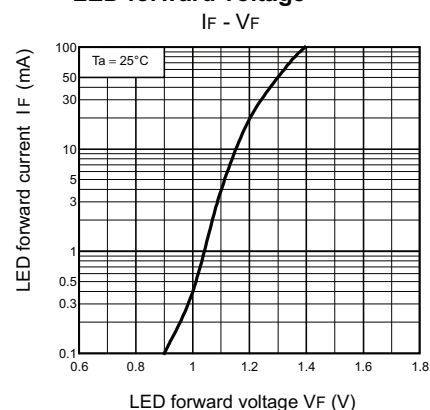


Continuous load current vs.
On-state voltage

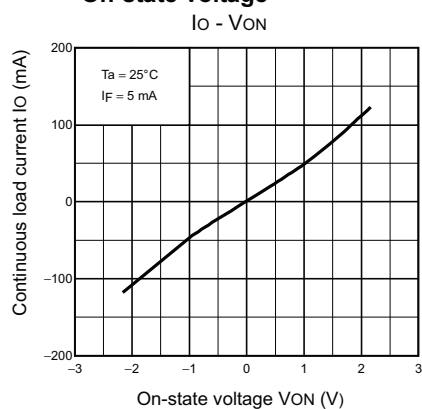


On-state resistance vs.
Ambient temperature

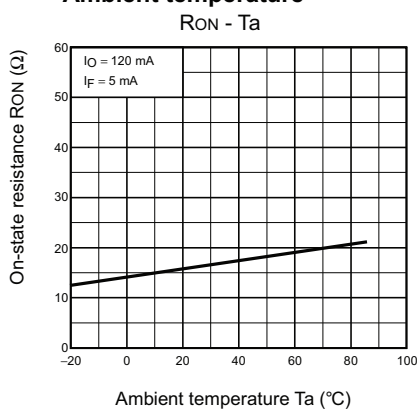


Trigger LED forward current vs.
Ambient temperature

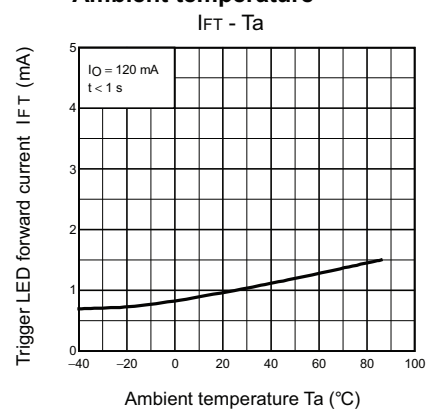


Turn ON, Turn OFF time vs.
LED forward current

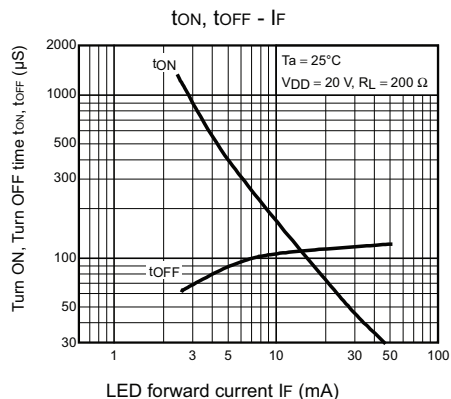

Turn ON, Turn OFF time vs.
Ambient temperature

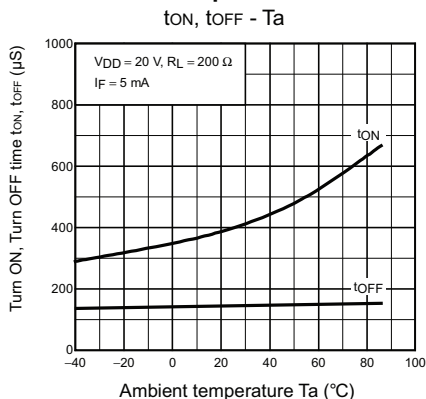

Current leakage vs.
Ambient temperature

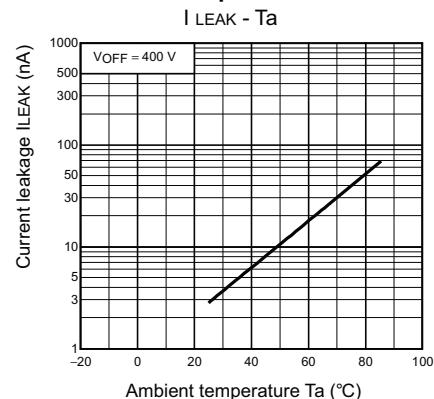

All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

OMRON[®]

**OMRON ELECTRONIC
COMPONENTS LLC**

55 E. Commerce Drive, Suite B
Schaumburg, IL 60173

847-882-2288

OMRON ON-LINE

Global - <http://www.omron.com>

USA - <http://www.components.omron.com>

Cat. No. X302-E-1

12/10

Specifications subject to change without notice

Printed in USA

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com