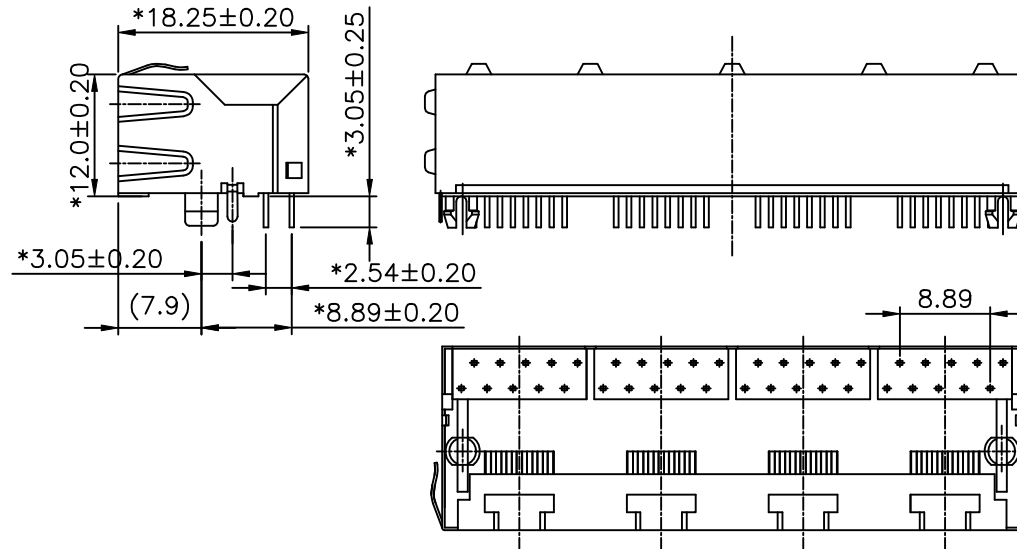
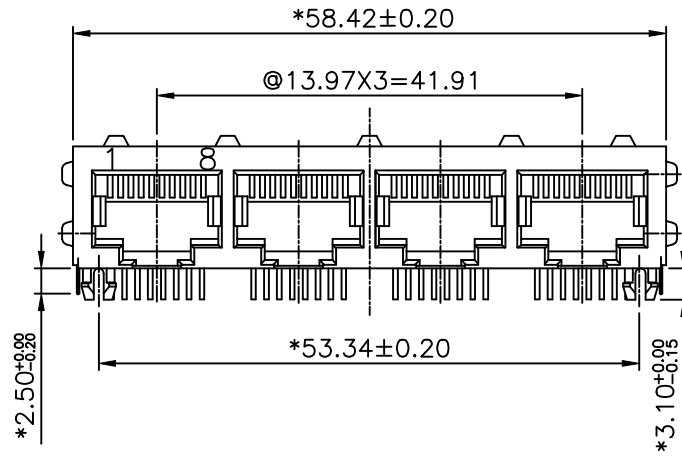


**NOTES:****ELECTRICAL:**

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 45 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : PBT+30%G.F UL94V-0.
2. INSERTER MATERIAL : PBT+30%G.F UL94V-0.
3. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
4. PLATING : GOLD PLATING OVER NICKEL.
5. OPERATING LIFE : 750 CYCLES MIN.
6. PCB RETENTION PRE-SOLDER : 1 LB MIN.
7. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:


1. STORAGE : -40°C TO +85°C.
 2. OPERATION: 0°C TO 70°C.
 3. WAVE SOLDER TEMPERATURE: 230°C TO 250°C 5~10 SECONDS.
- MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

CUL FILE NO. E163191

ROHS PART NUMBER: E5688-XSC08X-L

- 1- 3U" 2- 6U"
3- 15U" 4- 30U"
5- 50U"

SHIELD
2 w/o logo TIN
3 w/o logo NICKEL

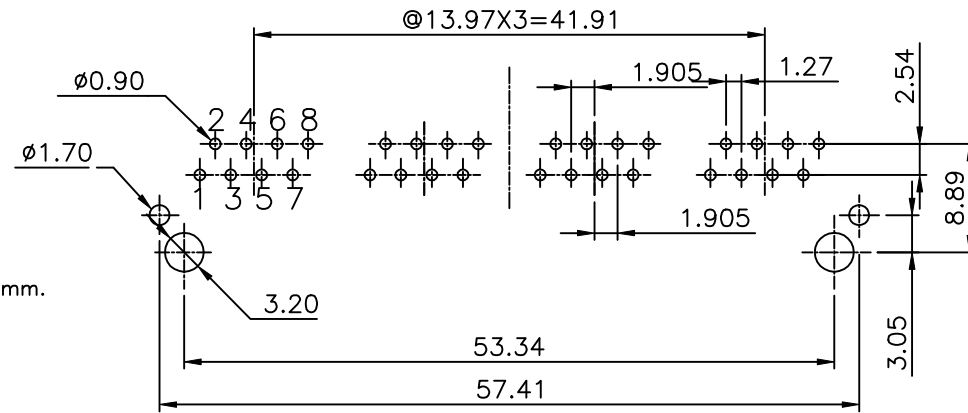

PC Board Layout Component Side Shown

MM (INCH)		DFTO ANKUE	DATE 11/25/05	FULL RISE ELECTRONIC CO., LTD	
TOLERANCES EXCEPT AS NOTED		CHKDASHLELLY	DATE 2005/11/25		
MM	±	MFO	DATE	TITLE	
.0 ±0.20	±	APPVLLUSHENG	DATE 2005/11/25	11.5 SIDE ENTRY PCB JACK 8P (W/TABS)	
.00 ±0.15	±	MATERIAL :		DRAWING NO. GE563135-LC	
.000 ±0.075	±	QT*Y :		/PART NO. SEE NOTE	
ANGLES ±		FINISH :		DO NOT SCALE DRAWING	
THIRD ANGLE PROJECTION		SCALE :		SHEET X OF Y	

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com