


Reflective Object Sensor

OPB609 Series



Features:

- OP609 emitter (940 nm IR-LED)
- Unfocused for sensing diffuse surface
- Low-cost plastic housing
- High-speed phototransistor output

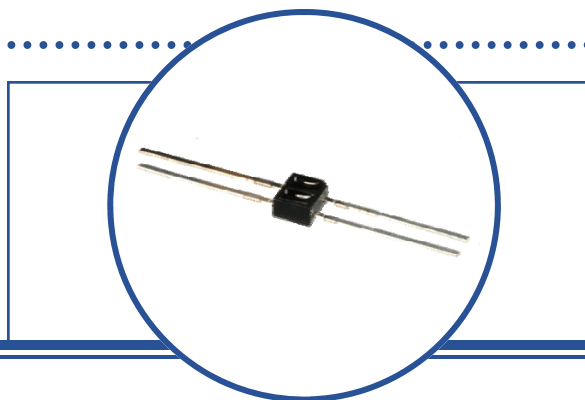

Description:

The **OPB609** consists of an 940 nm, Light Emitting Diode (LED) and an NPN silicon Phototransistor, which are mounted "side-by-side" on parallel axes in a black opaque plastic housing. This unfocused reflective object sensor is ideal for detection of diffuse materials such as paper, labels, or anything with a matte finish.

Custom electrical, wire and cabling and connectors are available. Contact your local representative or OPTEK for more information.

Applications:


- Non-contact reflective object sensor
- Assembly line automation
- Machine automation
- Machine safety
- End-of-travel sensor
- Door sensor
- Edge detection
- Paper jam detection
- Mark detection

CONTAINS POLYSULFONE

To avoid stress cracking, we suggest using ND Industries' **Vibra-Tite** for thread-locking. **Vibra-Tite** evaporates fast without causing structural failure in OPTEK's molded plastics.

Ordering Information	
Part Number	Description
OPB609AX	Reflective Object Sensor with IR LED
OPB609GU	
OPB609RA	

Pin #	Function
1	Anode
2	Cathode
3	Collector
4	Emitter

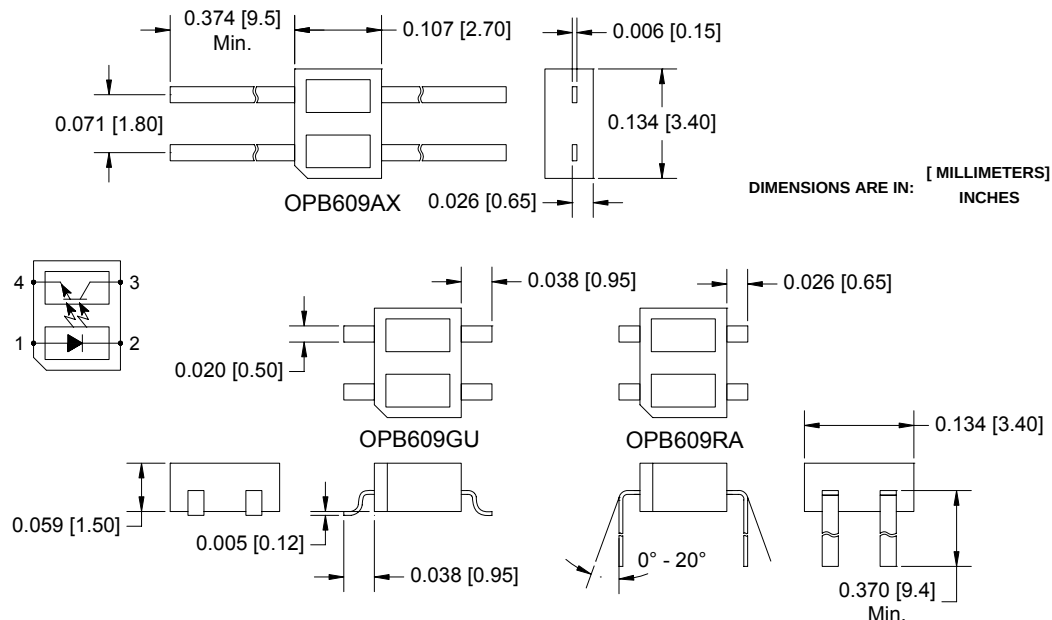

RoHS

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

Absolute Maximum Ratings ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Storage and Operating Temperature Range	-25° C to +85° C
Lead Soldering Temperature [1/16 inch (1.6 mm) from the case for 5 seconds with soldering iron] ⁽¹⁾	260° C ⁽¹⁾

Input LED

Forward DC Current	50 mA
Peak Forward Current (1 μs pulse width, 300 pps)	1 A
Reverse DC Voltage	5 V
Power Dissipation ⁽²⁾	75 mW

Output Phototransistor

Collector-Emitter Voltage	30 V
Emitter-Collector Voltage	5 V
Collector DC Current	50 mA
Power Dissipation ⁽³⁾	75 mW

Electrical Characteristics ($T_A = 25^{\circ}\text{C}$ unless otherwise noted)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
--------	-----------	-----	-----	-----	-------	-----------------

Input IR LED (see OP168 for additional information)

V_F	Forward Voltage	-	-	1.7	V	$I_F = 20 \text{ mA}$
I_R	Reverse Current	-	-	10	μA	$V_R = 5 \text{ V}$
θ	Beam Divergence	-	90	-	Degree	$I_F = 20 \text{ mA}$

Output Phototransistor (see OP508 for additional information)

$V_{(BR)CE0}$	Collector Emitter Breakdown Voltage	30	-	-	V	$I_C = 100 \mu\text{A}$
$V_{(BR)ECO}$	Emitter Collector Breakdown Voltage	5	-	-	v	$I_E = 100 \mu\text{A}$
I_{CEO}	Collector Dark Current	-	-	100	nA	$V_{CE} = 10 \text{ V}, I_F = 0$

Coupled Characteristics


$V_{CE(SAT)}$	Collector Emitter Saturation Voltage	-	-	0.4	V	$E_E = 2.0 \text{ mW/cm}^2, I_C = 2 \text{ mA}$
$I_{C(ON)}$	On-State Collector Current	0.1	-	-	mA	$d = 0.5'' (12.7 \text{ mm})$ $I_F = 20 \text{ mA}, V_{ce} = 5 \text{ V}$
$I_{C(OFF)}$	Off-State Collector Current	-	-	200	nA	$V_{CE} = 5 \text{ V}, I_F = 20 \text{ mA}$

Notes:

1. RMA flux is recommended. Duration can be extended to 10 seconds maximum when flow soldering.
2. Derate linearly 1.25 mW/°C above 25°C.
3. Derate linearly 1.33mW/°C above 25°C.

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

OP609 - Normalized Output vs Distance

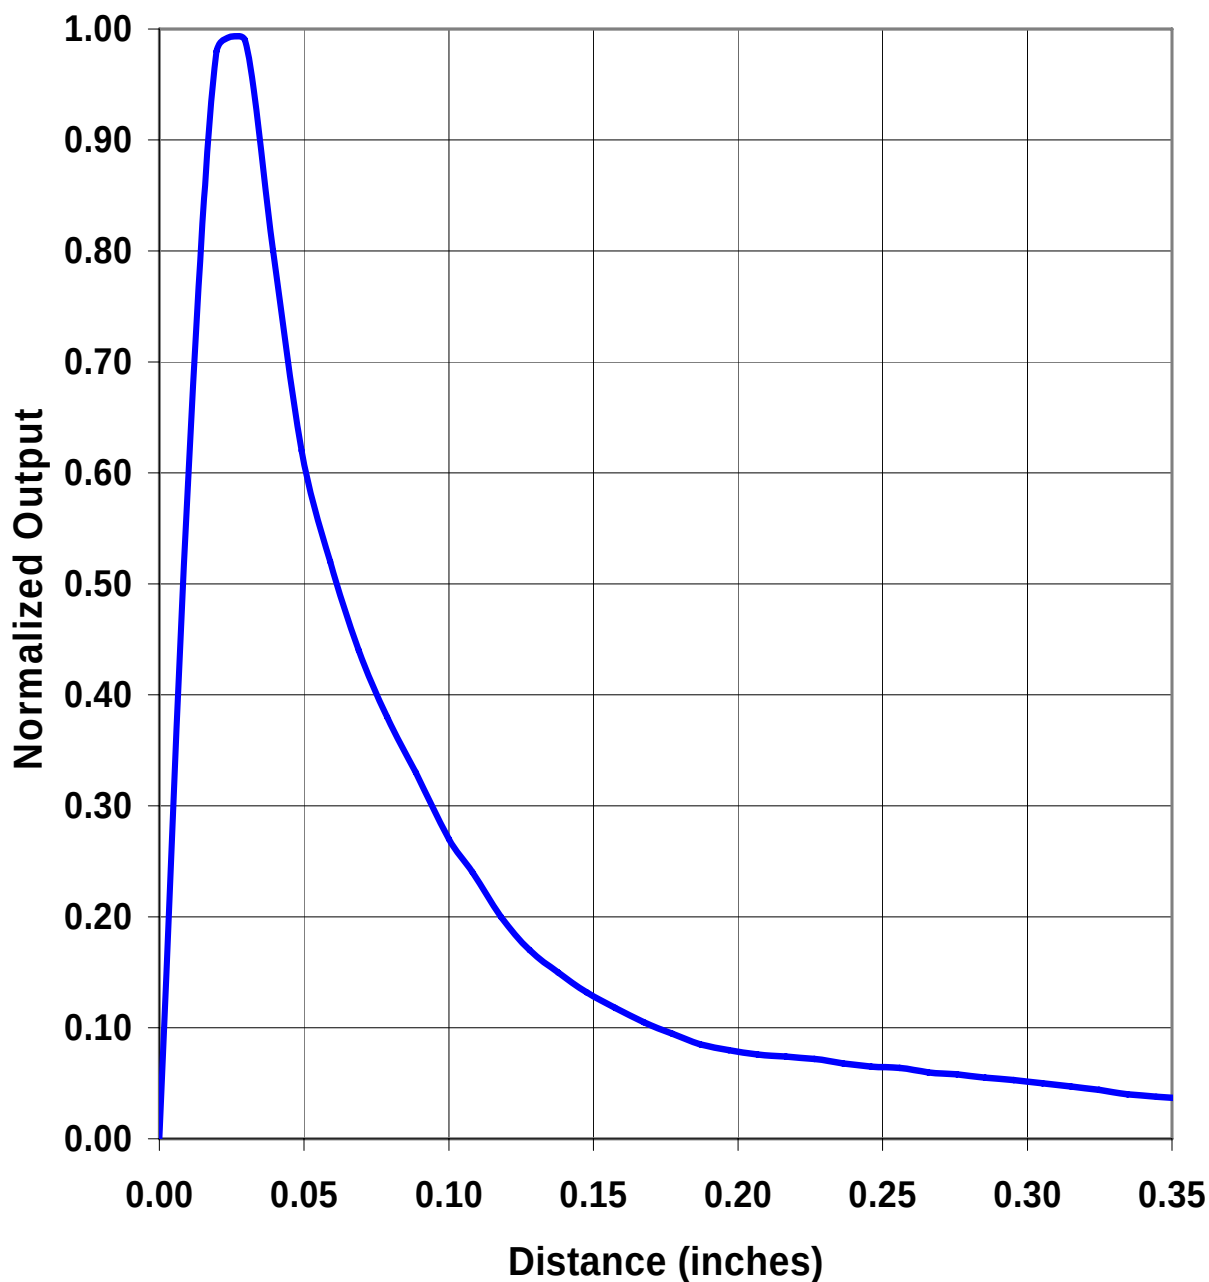

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com