

"High Frequency Ceramic Solutions"

3.7 GHz 1:1 RF Balun

Detail Specification: 10/13/11

P/N 3700BL15B050

Page 1 of 2


General Specifications

Part Number	3700BL15B050
Frequency (MHz)	3400~4000
Unbalanced Impedance	50 Ω
Differential Balanced Imp.	50 Ω
Insertion Loss	1.2 dB max.
Return Loss	9.5 dB min.
Phase Difference (degree)	180 $\pm$ 25
Amplitude Difference	2 dB max.

Operating Temperature	-40 to +85°C
Storage Temperature	+5 to +35°C, 18 mos. max.
Range	Humidity 45~75% RH
Reel Quantity	4,000
Power Capacity	100 mWatts max.
Impedance	50 / 50 Ω


Mechanical Dimensions

	In	mm
L	0.079 $\pm$ 0.004	2.00 $\pm$ 0.10
W	0.049 $\pm$ 0.004	1.25 $\pm$ 0.10
T	0.033 $\pm$ 0.004	0.85 $\pm$ 0.10
a	0.012 $\pm$ 0.004	0.30 $\pm$ 0.10
b	0.008 $\pm$ 0.004	0.20 $\pm$ 0.10
c	0.012 $\pm$ 0.004	0.30 $\pm$ 0.10
g	0.014 $\pm$ 0.004	0.35 $\pm$ 0.10
p	0.026 $\pm$ 0.002	0.65 $\pm$ 0.05

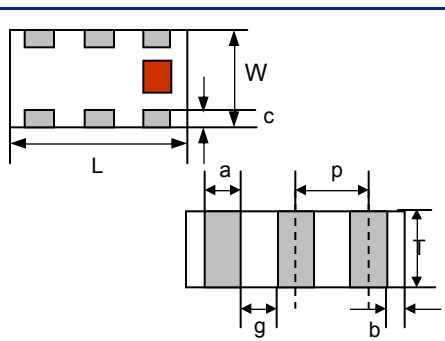

Terminal Configuration

No.	Function
1	Unbalanced Port
2	GND or DC Feed
3	Balanced Port
4	Balanced Port
5	GND
6	NC




Mounting Considerations

Mount these devices with colored mark facing up.

* Line width should be designed to provide proper impedance matching characteristics.

Units: mm

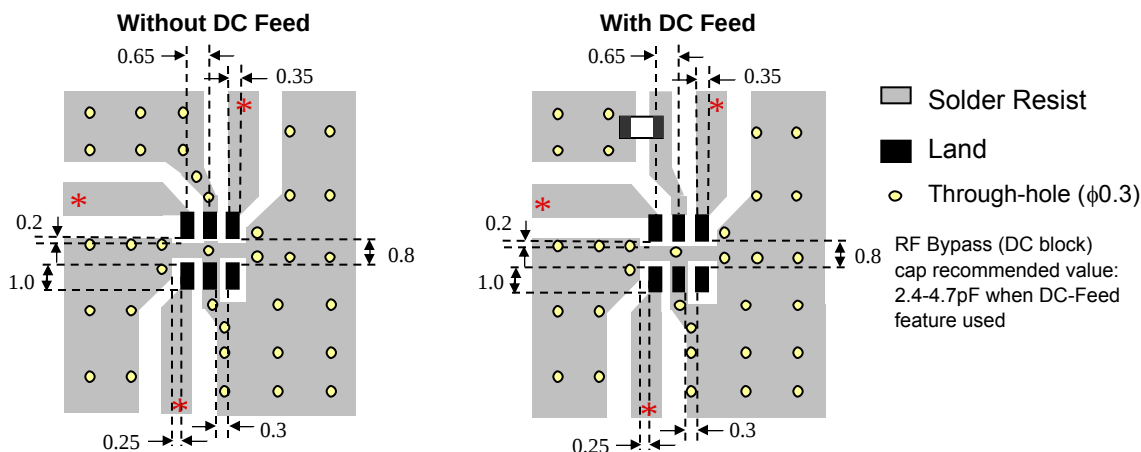

Units: mm

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2011 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"


3.7 GHz 1:1 RF Balun

P/N 3700BL15B050

Detail Specification: 10/13/11

Page 2 of 2

Typical Electrical Performance (T=25°C)

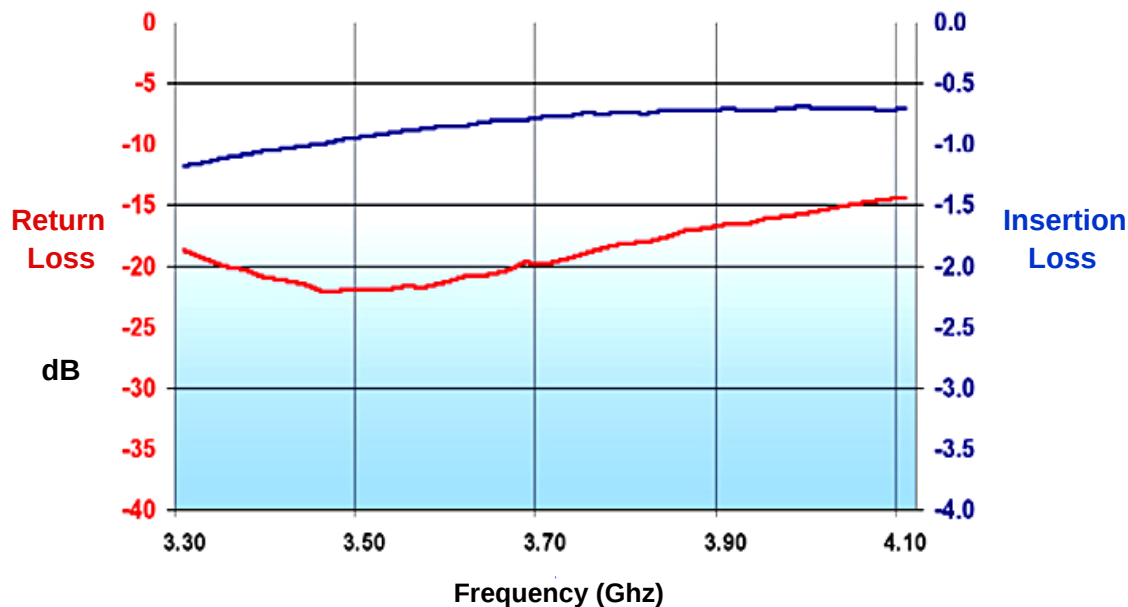

P/N	Packaging Style	Bulk	Suffix = S	Eg. 3700BL15B050S
		T & R	Suffix = E	Eg. 3700BL15B050E
Suffix	Termination Style	100% Tin	Suffix = None	Eg. 3700BL15B050(E or S)
	Evaluation Board	3700BL15B050-EB2SMA		

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2011 Johanson Technology, Inc. All Rights Reserved

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com