


## Features

- Waterproof construction.
- Suitable for outdoor applications, signboard or message board, etc.
- RoHS compliant.



## Package Schematics

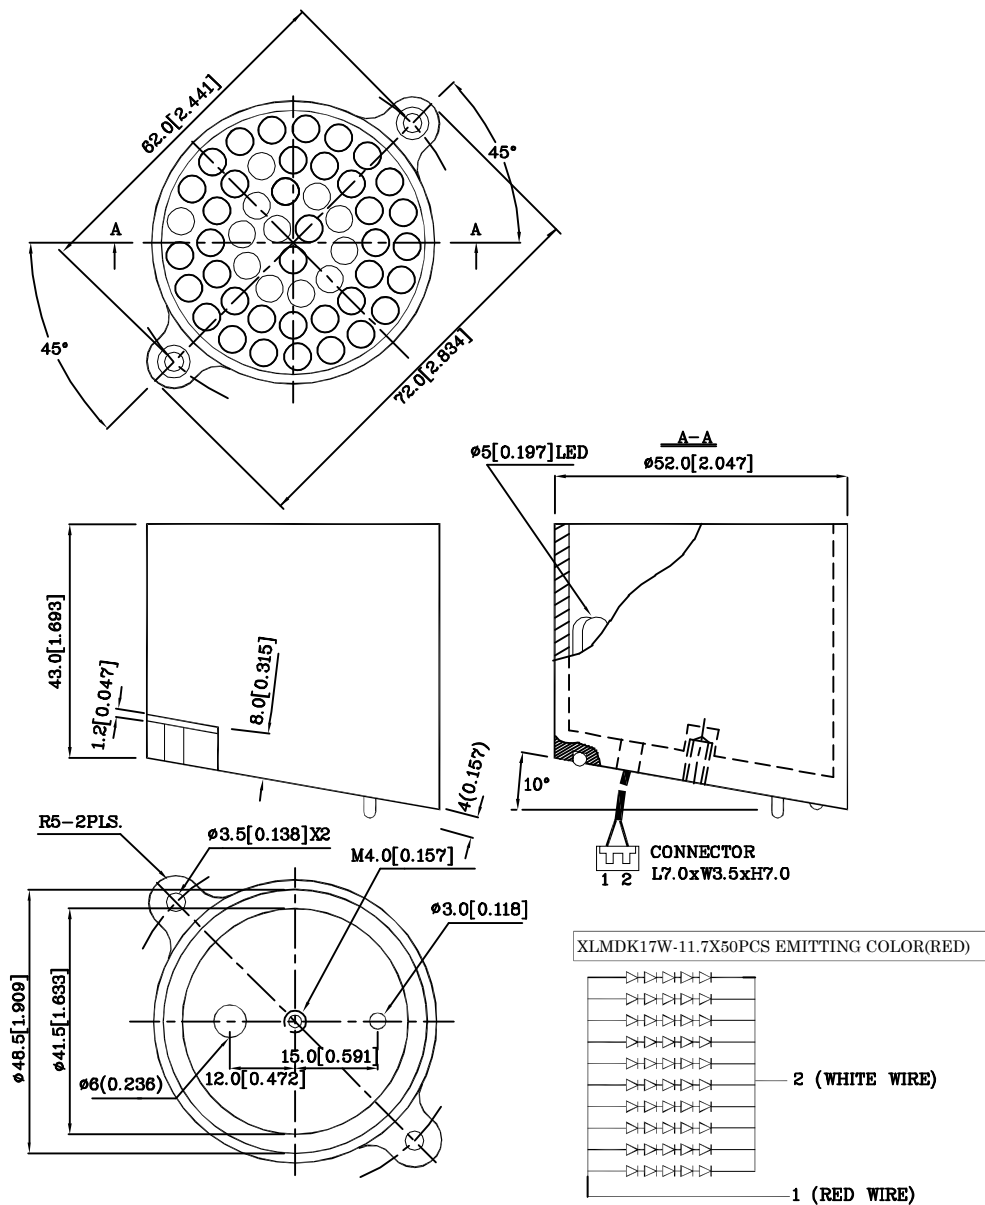

### Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Min.	Typ.	Max.	Units	Test Conditions
I <sub>v</sub>	Luminous Intensity CIE127-2007*	XK50MDKW46	35000	74990	-	mcd	I <sub>F</sub> =200mA
			*12300	*22990			
2 θ <sub>1/2</sub>	Viewing Angle		-	40	-	deg	-
V <sub>F</sub>	Forward Voltage		-	9.75	12.5	V	I <sub>F</sub> =200mA
λ <sub>P</sub>	Peak Wavelength CIE127-2007*		-	645*	-	nm	I <sub>F</sub> =200mA
λ <sub>D</sub>	Dominant Wavelength CIE127-2007*		-	630*	-	nm	I <sub>F</sub> =200mA
Δλ <sub>1/2</sub>	Spectral Line Half-width		-	28	-	nm	I <sub>F</sub> =200mA
I <sub>R</sub>	Reverse Current		-	-	100	uA	V <sub>R</sub> = 5V


Note:



\*Luminous intensity value and wavelength are in accordance with CIE127-2007 standards.

### Absolute Maximum Ratings at TA=25°C

Parameter	Type	Units
Power dissipation	3750	mW
DC Forward Current	300	mA
Reverse Voltage	5	V
Operating Temperature	-40°C To +70°C	
Storage Temperature	-40°C To +85°C	
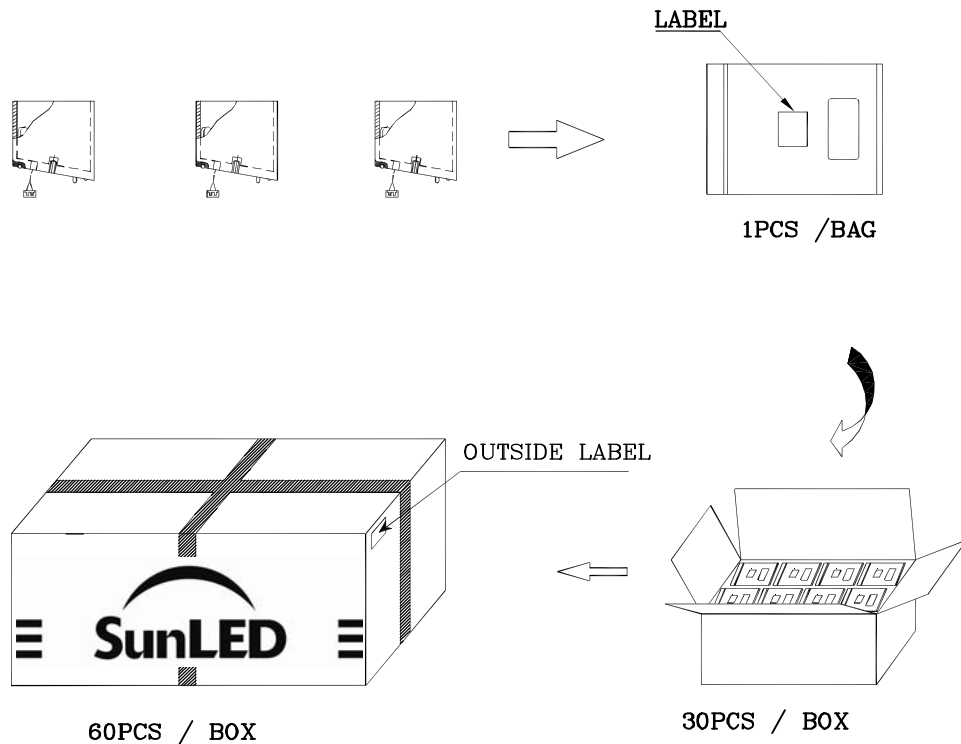
## PACKING & LABEL SPECIFICATIONS



		<b>Q. C.</b> <b>Q C</b> <b>XX XX XX</b> <b>PASSED</b>
P/NO : XK50xxx		
QTY : 1 pcs		CODE: XXX
S/N : XX		
LOT NO:		
 XXXXXXXXXXXXXXXXXXXX		
RoHS Compliant		

## TERMS OF USE

1. Data presented in this document reflect statistical figures and should be treated as technical reference only.
2. Contents within this document are subject to improvement and enhancement changes without notice.
3. The product(s) in this document are designed to be operated within the electrical and environmental specifications indicated on the datasheet.  
User accepts full risk and responsibility when operating the product(s) beyond their intended specifications.
4. The product(s) described in this document are intended for electronic applications in which a person's life is not reliant upon the LED. Please consult with a SunLED representative for special applications where the LED may have a direct impact on a person's life.
5. The contents within this document may not be altered without prior consent by SunLED.
6. Additional technical notes are available at <http://www.SunLEDusa.com/TechnicalNotes.asp>

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct     +86 (21) 6401-6692  
Email       amall@ameya360.com  
QQ         800077892  
Skype       ameyasales1 ameyasales2

➤ Customer Service :

Email       service@ameya360.com

➤ Partnership :

Tel         +86 (21) 64016692-8333  
Email       mkt@ameya360.com